



art light



SMART PERMANENT OUTDOOR STRING LIGHTS

RGB+W(3000K)



RoHS


CRI
≥80

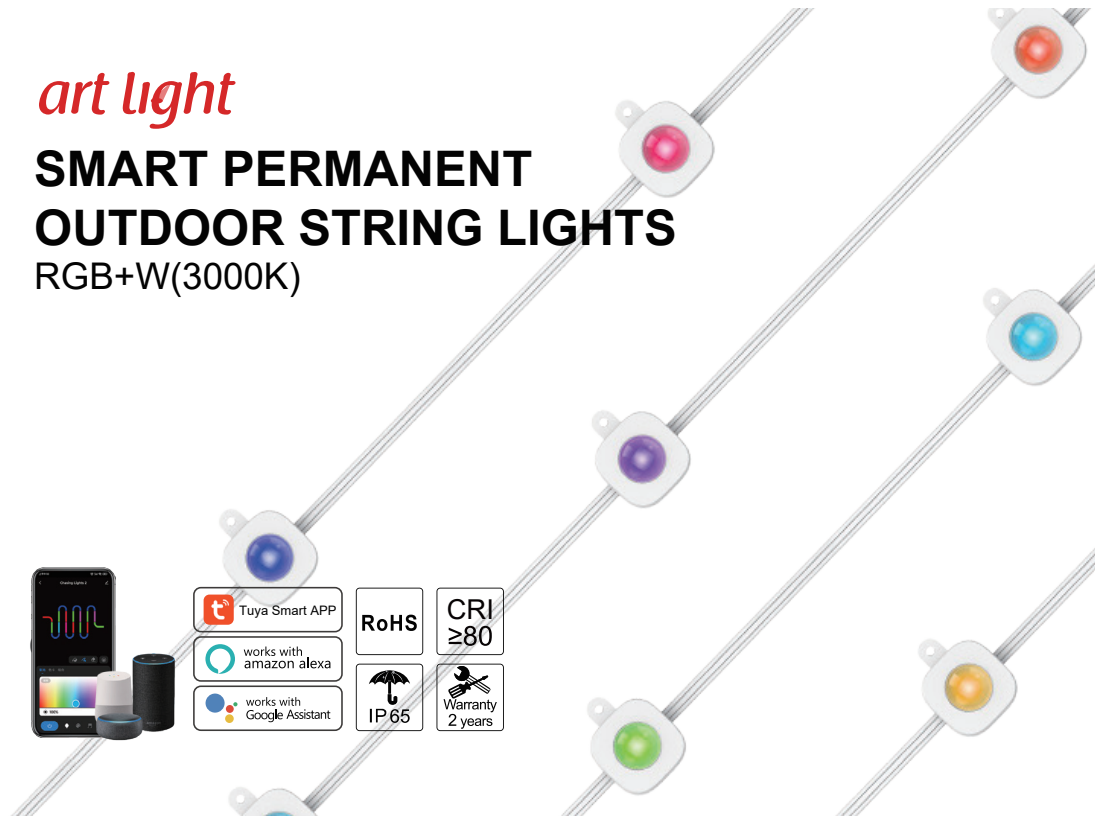


WIDE APPLICATIONS

RGB is mainly used for outdoor atmosphere rendering, such as walls/eaves/fences/corridors, etc.

Method 2: This mode is only suitable for installation on smooth surfaces with no stains.




- ① Peel off the release paper on the back of the double sided tape.



Installation distance from wall:

- ③ The optimum mounting distance of the lamp head from the wall is 412-inch.

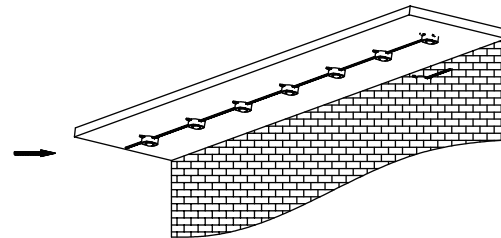

- ② Wipe the installation area clean, take the lamp head with adhesive tape removed and directly attach it to installation area surface. Press firmly to make it fit more tightly, and then install the remaining lamp heads in sequence.

Note:


1. For adhesive installation, due to different surface conditions, it is recommended to use screws for every 2 lamp heads to prevent the risk of lamp heads falling off;
2. For wooden or other materials into which self-tapping screws can be locked directly, there is no need to drill holes or use plastic expansion pipes. Install them directly with self-tapping screws.

NOTICE


1. Do not install the product in a high temperature environment;
2. The adapter needs to be connected in place, and there must be no looseness or poor contact;

INSTALLATION

Method 1: This method involves rough surfaces, such as concrete surfaces, highly granular coating surfaces, and rusted iron plates, which require screw installation and fixation.




- ① Drill $\varnothing 6\text{mm}$ holes at the mounting location, with a spacing of not more than 16.5inch between the two holes.



- ② Fix the plastic expansion tubes into the holes in turn with a hammer.



- ③ Peel off the release paper on the back of the double sided tape.



- ④ Take a screwdriver and use M4*20 screws to fix the lamp head on the surface of the plastic expansion tube.

Eaves & Soffits

The individual warm white light 3000K can be used for outdoor lighting.






Model	Working temperature	LED type	Angle	Adapter	Lamp holder (PCS)	Control mode	power supplier version
ART-STRING-50	-20 -60	5054RGBW	100°	36V/1.2A	30	Wi Bluetooth + button	American plug AC100-120V
ART-STRING-100	-20 -60	5054RGBW	100°	36V/2.4A	60	Wi Bluetooth + button	American plug AC100-120V
Optional accessory							
ART-STRING-10	-20 -60	5054RGBW	100°		10	Wi-Fi control + Bluetooth + button	

PRODUCT INFORMATION

Model	Color	Power (W)	Light efficiency	Luminous flux (±10%)
ART-STRING-50	2700K	30W	30lm/W	900lm
	Red	20W		
	Green	20W		
	Blue	20W		
ART-STRING-100	2700K	60W	30lm/W	1800lm
	Red	40W		
	Green	40W		
	Blue	40W		
Optional accessory				
ART-STRING-10	2700K	10W	30lm/W	300lm
	Red	6.5W		
	Green	6.5W		
	Blue	6.5W		

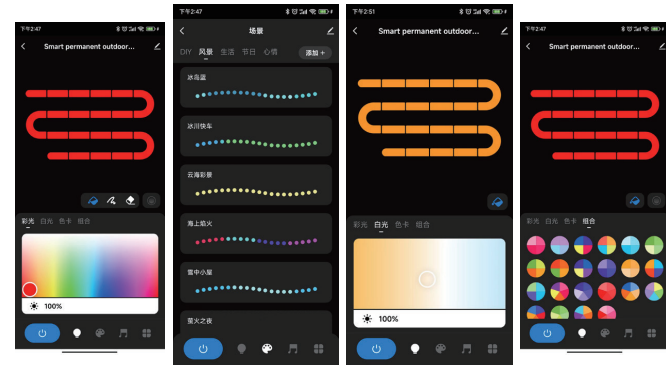

Download the APP to control the lights.
A variety of intelligent dynamic


PRODUCT FEATURES

Good protection against dust and water by IP65 rating




OPTIONAL ACCESSORY (ART-STRING-10)



The clients can order extra string lights to extend their 50ft and 100ft string lights. For 50ft string lights, it is allowed to connect 1 extra group of 10 heads, for 100ft string lights, it is allowed to connect 2 extra groups of 10 heads.

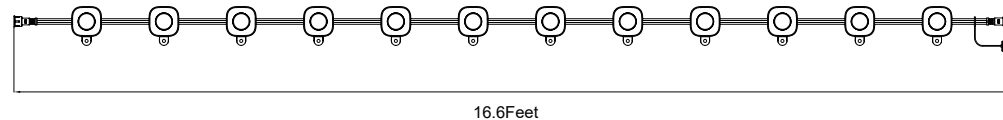

Note: Conventional 50 feet (30 heads) and 100 feet (60 heads)
 30 heads for 50 feet: 3 sets of 10 heads connected;
 60 heads for 100 feet: 6 sets of 10 heads connected.

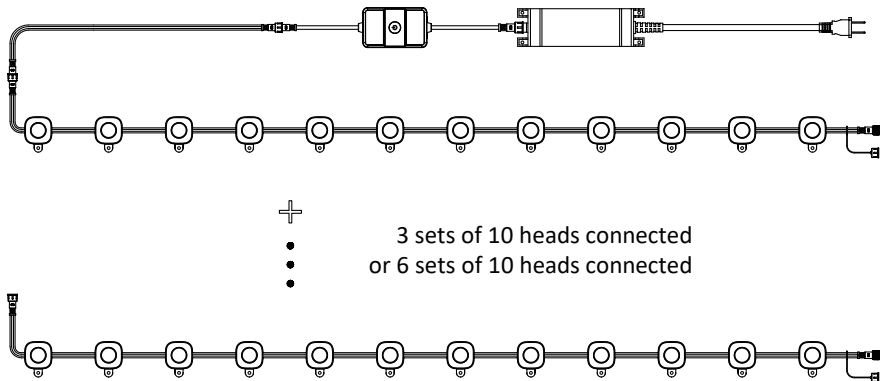

FEATURES

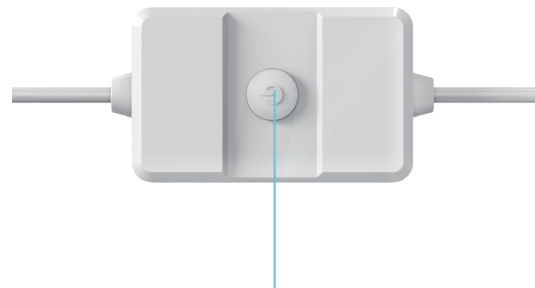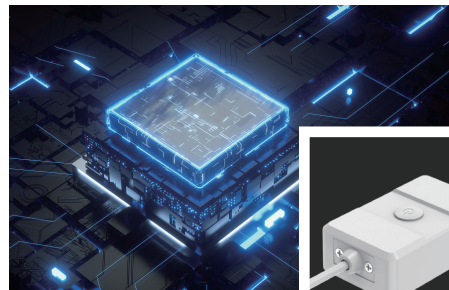

Click once to switch the mode

Click twice to turn on/off the light


Long press for 5 seconds red light
 flashing in connection network mode

PRODUCT FEATURE

PC+ABS housing, adding anti-UV particles, good weather/aging/yellowing resistance.

Customized optical lens, made of PMMA material, 92% transmittance, strong toughness and arc resistance, and excellent weather/aging resistance.


UL certified PVC wire, three-core 22AWG, each core is a multi-stranded wire consisting of 17 pure copper wires, excellent conductivity and flexibility.

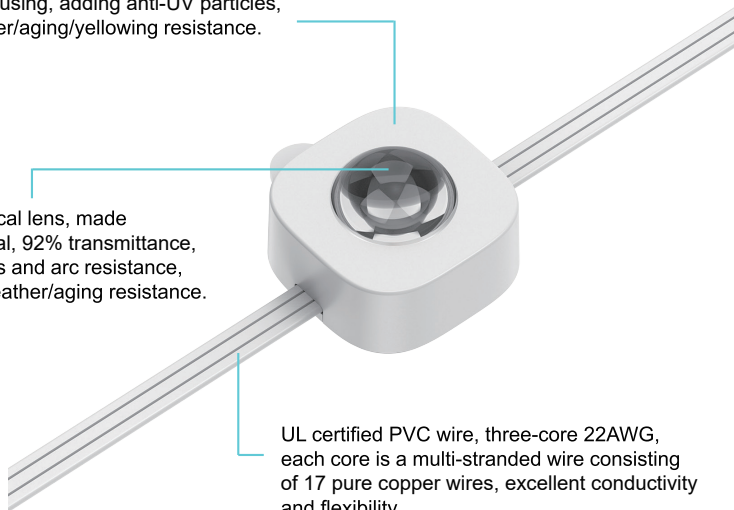



DIMENSIONS

(unit: feet)


A single group of 10 heads has a total length of 16.6 feet.

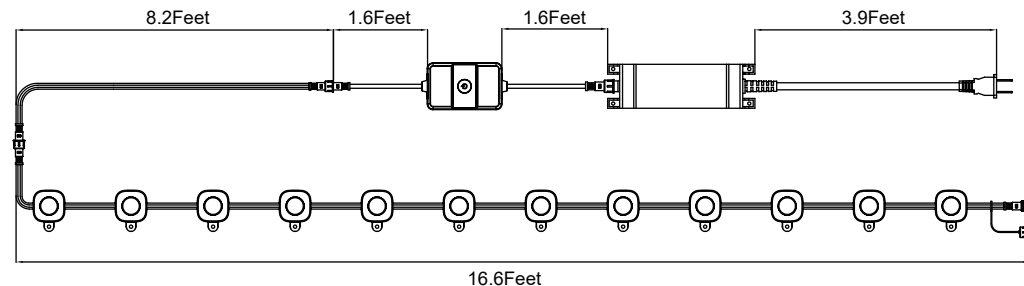

DIMENSIONS (unit: inch)

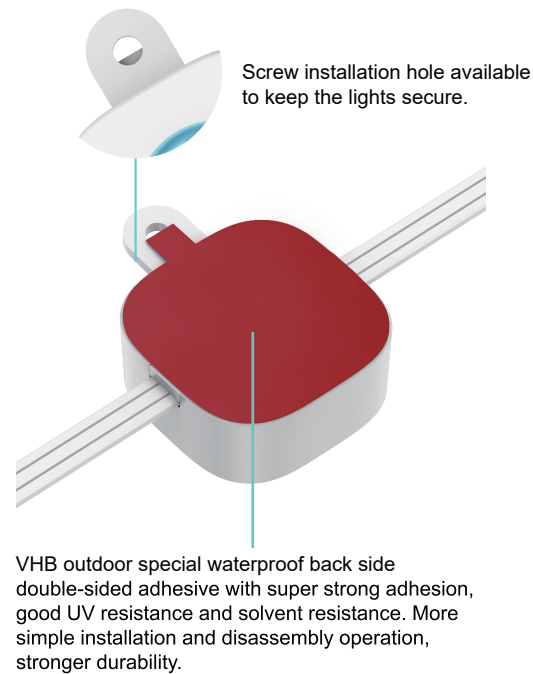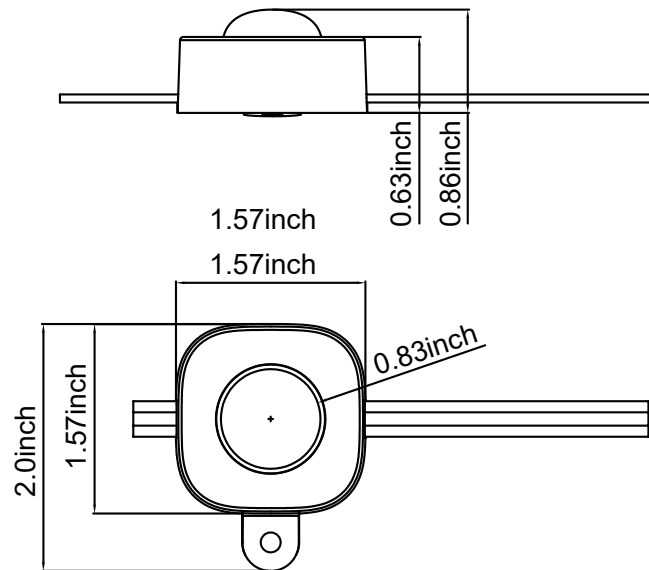

ART-STRING-50

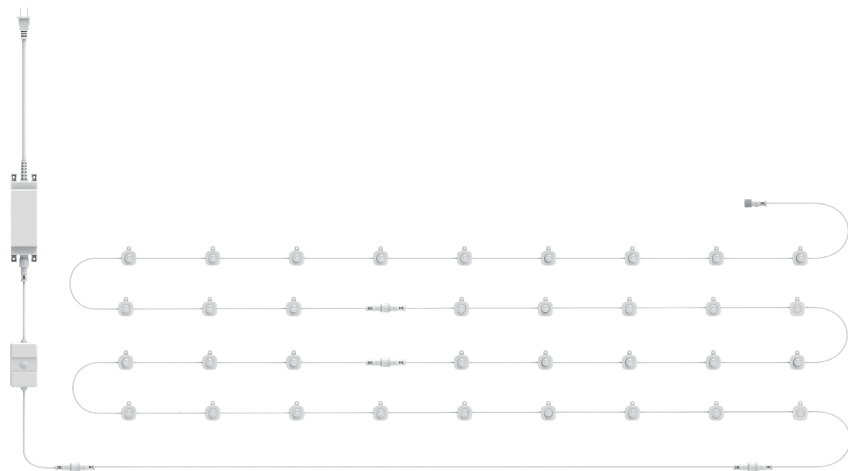

ART-STRING-100

