



Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


Suspending installation

Safety Instructions


1. Read this instruction carefully before installation.
2. Installation should be in accordance with national and local electrical laws and regulations.
3. Product should installed by qualified and licensed electrician.
4. Do not install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Fixtures should not covered with thermal insulation pads or similar materials at any circumstance.
8. Do Not use out doors.

Parts List


Hanging plate accessories




Expanding rubber stopper




Long screws



Mounting part




Sling assembly




Wire Nuts


Driver's wires package(optional)




Wire Nuts




Ties




Wires accessories




orange terminal
DIM+(Pueple)
DIM-(Pink)



Yellow terminal
L(Black)
Ground wire (Green)
N(White)





12V(Orange)




white terminal

Wiring for connection parts

Function description of the control board

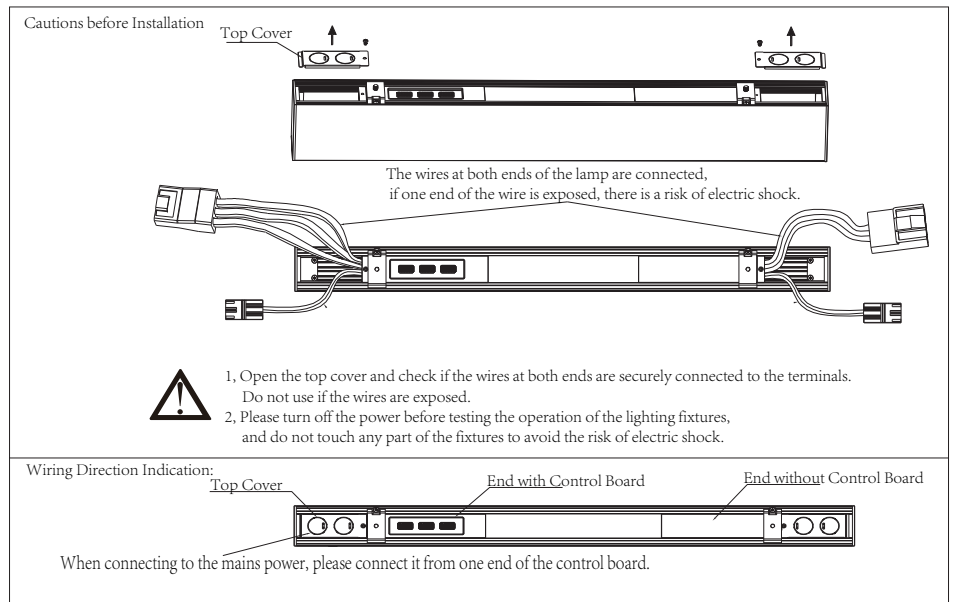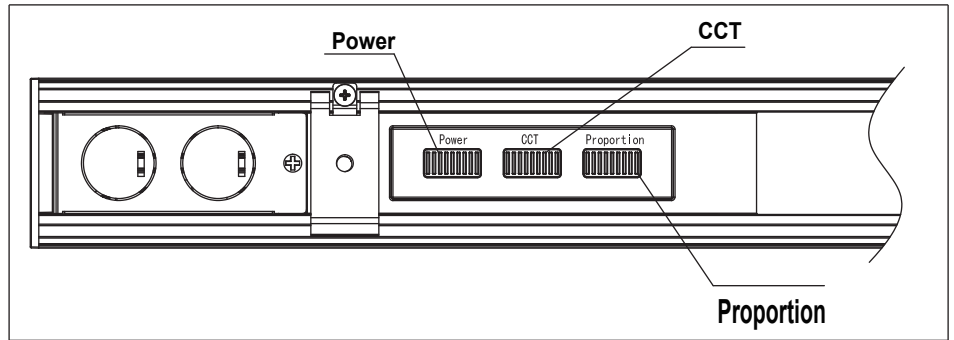

Mounting Steps

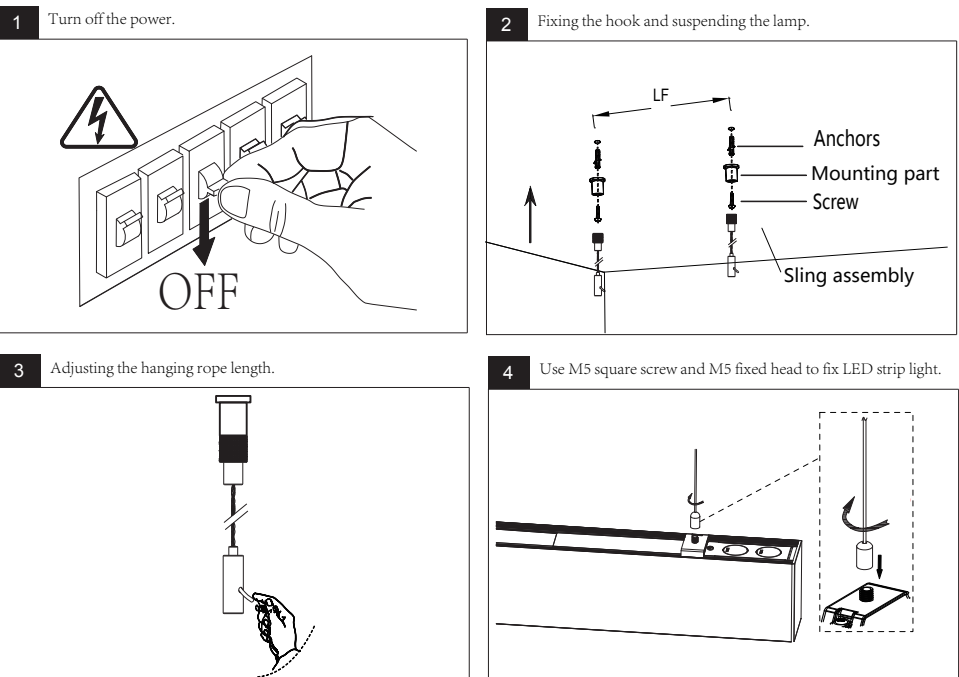

Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


Wiring Diagram

LINE	●	LINE-BLACK
DREEN	●	GROUND-GREEN
NEUTRAL	●	NEUTRAL-WHITE
DIM(+)/VIOLET	●	VIOOLET
DIM(-)/PINK	●	PINK




1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

Wiring Diagram

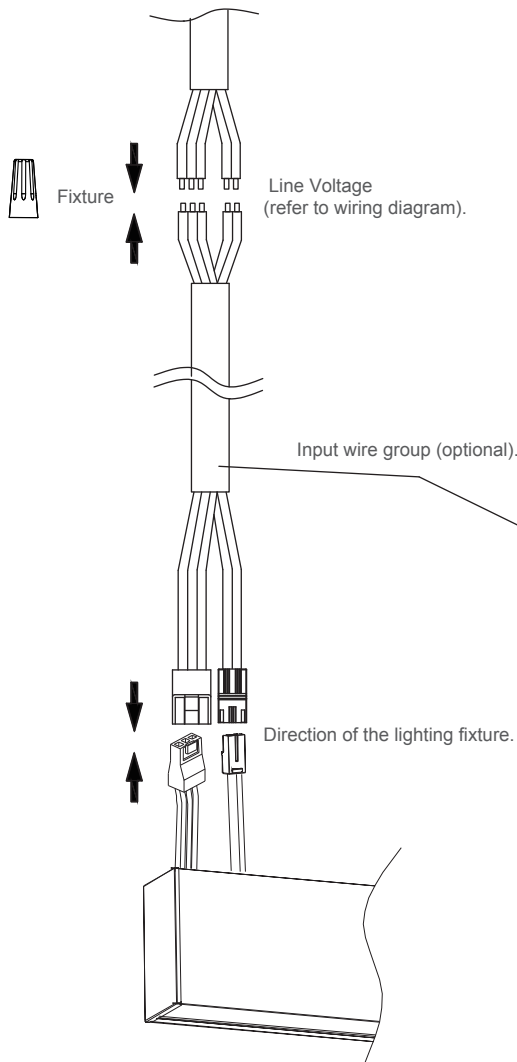


Three terminals: neutral wire, live wire, ground wire
Two terminals: DIM+ (purple), DIM- (pink)

5 Open the end of the lamp to be connected. Two terminal

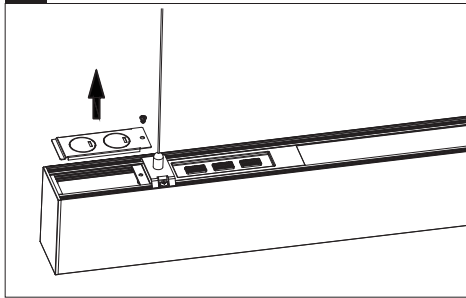

6 Take out wire.

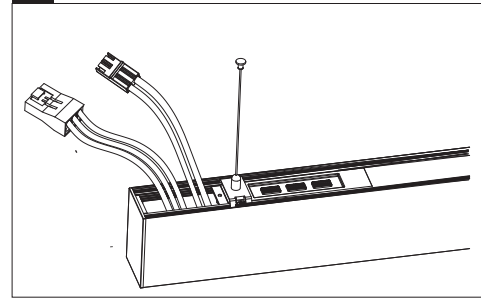


7 Cut off the corresponding terminals as required.


Three-position terminal: BLACK (LINE)
WHITE (NEUTRAL)
GREEN (GRD)

Two terminal: PURPLE (DIM +)
PINK (DIM -)

1. After cutting off the connecting terminals, the lighting fixture will no longer be able to link with other fixtures through terminals.
2. After cutting the wires, please ensure proper protection and labeling, and avoid using them for secondary wiring.

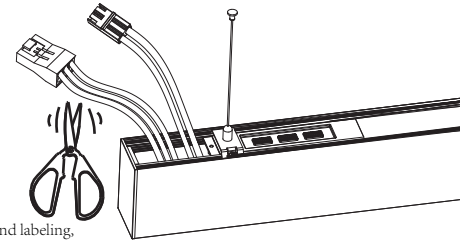


8 Turn off the power and wiring by using wire nut.

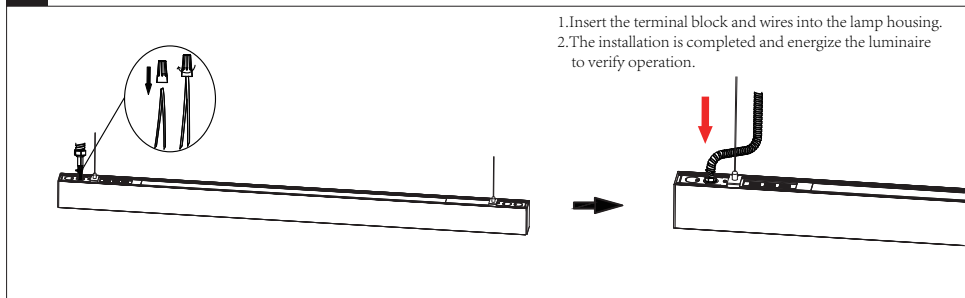

1. Insert the terminal block and wires into the lamp housing.
2. The installation is completed and energize the luminaire to verify operation.

Input wire group (optional).

1

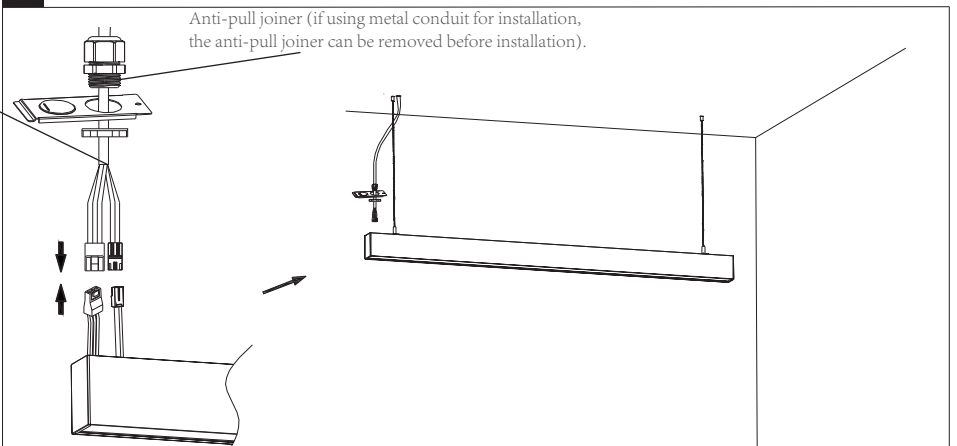

2

The installation is completed after wiring according to the wiring section of the hoisting installation instructions.

