



Surface-mount & Pendant LED Downlights



Product Code	Power	Lumen	CCT	Beam Angle
CL-DL2-SD-12W-30D-3K	12W	1080lm	3000K	30°
CL-DL2-SD-12W-30D-4K	12W	1080lm	4000K	30°
CL-DL2-SD-20W-30D-3K	20W	1800lm	3000K	30°
CL-DL2-SD-20W-30D-4K	20W	1800lm	4000K	30°

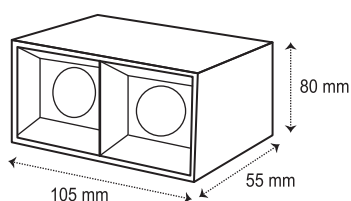

12W

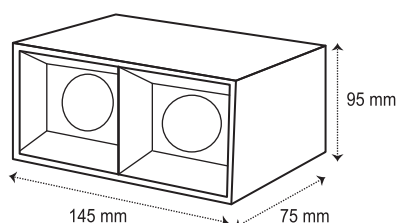

20W



Pendant kit

- Surface & Pendant installation
- Input Voltage: 120 VAC 50/60Hz
- Triac Dimmable
- OSRAM COB LED chip
- Suitable for damp locations
- CRI: >90
- PF: >0.95
- cETL approved
- Lifetime >50,000 hrs
- 5 years warranty

Body Color:
Black housing with Black reflector
White housing with Silver reflector