

Outdoor Light Transformer

with integrated timer and photocell

CL-ODR-CV-100W

Only for use with lighting equipment.

INPUT: 120VAC 60Hz

OUTPUT: 12VAC 8.33A 100VA

POWER: 100W

Please follow the instructions below for Installation:

1. Plug in power (120VAC 60Hz).
2. Connect the lighting equipment using appropriate low voltage wires to the terminals indicated in Fig.3. Ensure that the wires and screws are tightened sufficiently to prevent short circuits or sparks.
3. Adjust the timer as follows (refer to Fig.4):
 - **OFF**: Power is permanently off.
 - **ON**: Power is permanently on.
 - **AUTO**: Power will be on from dusk to dawn.
 - **4H**: Power will be on from dusk for 4 hours.
 - **6H**: Power will be on from dusk for 6 hours.
 - **8H**: Power will be on from dusk for 8 hours.

Cautions:

- Integrated circuit breakers will cut the power in case of a short circuit or overloading to prevent fire and protect electronic components of the transformer. Use the reset button to restore power.(Fig.2)
- Make sure total power is not exceeding 90 watt or 100VA.

cano light
Canadian Brightness



Fig1

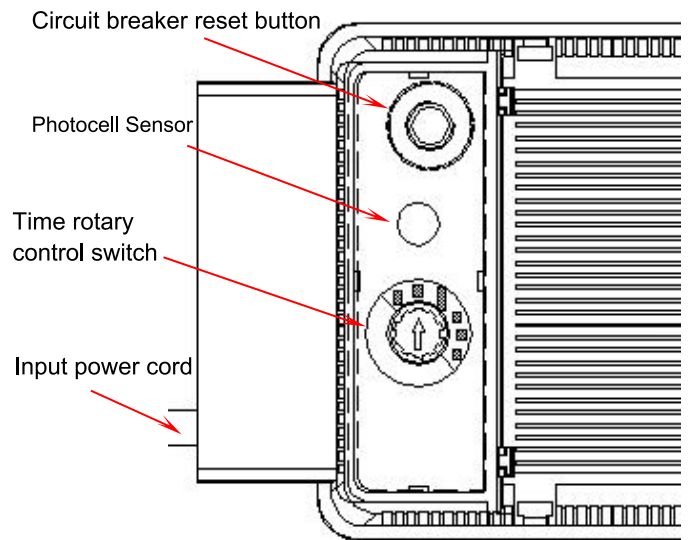


Fig2

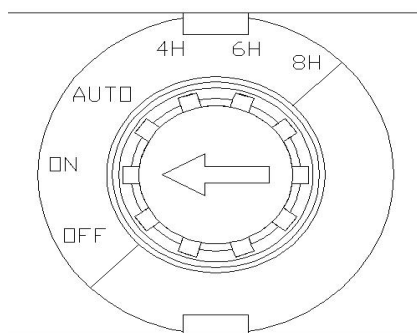


Fig4 (Time rotary control switch)

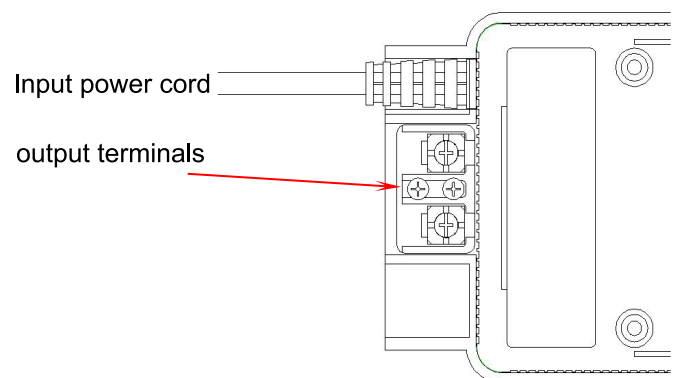


Fig3