


! Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


Notice

1. Read this instruction carefully before installation.
2. Installation should be in accordance with national and local electrical laws and regulations.
3. Product should installed by qualified and licensed electrician.
4. Do not install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Fixtures should not covered with thermal insulation pads or similar materials at any circumstance.
8. Do not touch the fixture if trial operation in case of danger.
9. Do not use out doors.


Parts List



"T" joiner




Screws



C


Installation

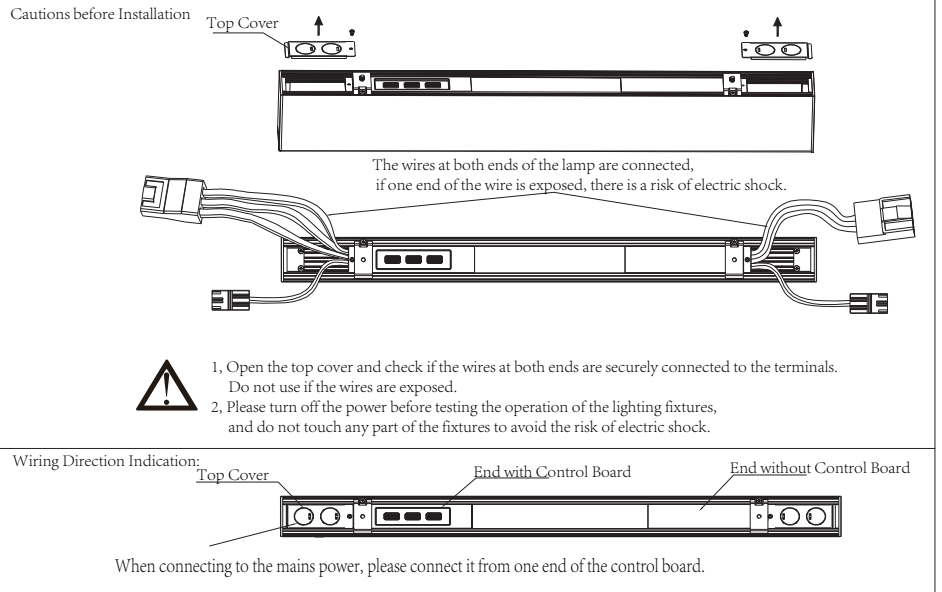


1. If any other shape needed, please contact the manufacturer for check.
2. When spliced fixtures are connected as a whole, the number of fixtures connected to the mains power in a single connection cannot exceed the number of lamps listed in the table below

Size	Wattage	110V	277V	347V
2FT	≤25w	16PCS	40PCS	50PCS
4FT	≤50w	8PCS	20PCS	25PCS
8FT	≤80w	6PCS	10PCS	12PCS
8FT	≤100w	4PCS	8PCS	10PCS


- 1 Remove the cover from "T" joiner.

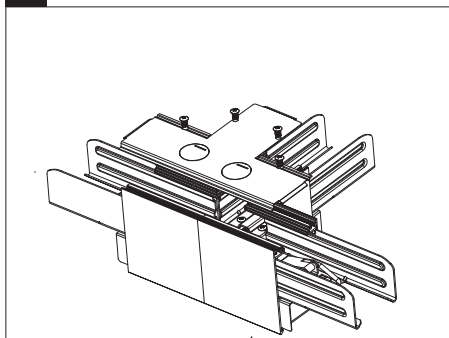

- 2 Remove the end cap and upper cover from fixture.

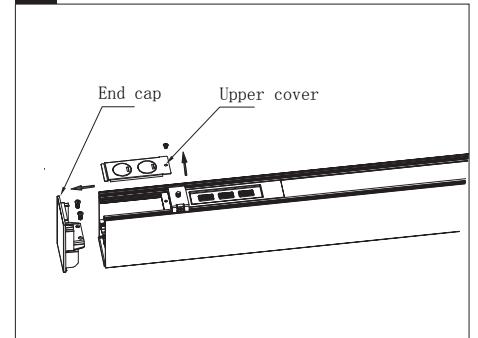


- 3 Slide the splicing bracket B into locating piece, then lock it with screws.

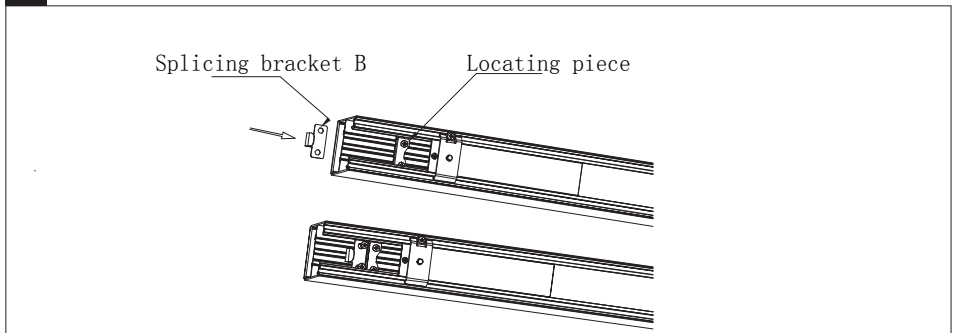


Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


- 4** Make the mounting marks on the ceiling for fixtures, please refer to pendant mounting for suspend the fixture.

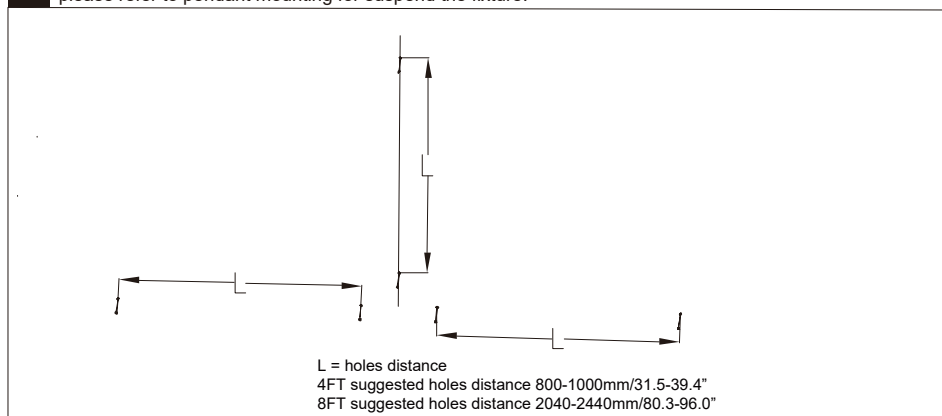


- 5** Adjust the lifting bracket in the fixture to a suitable position for suspending and linking.

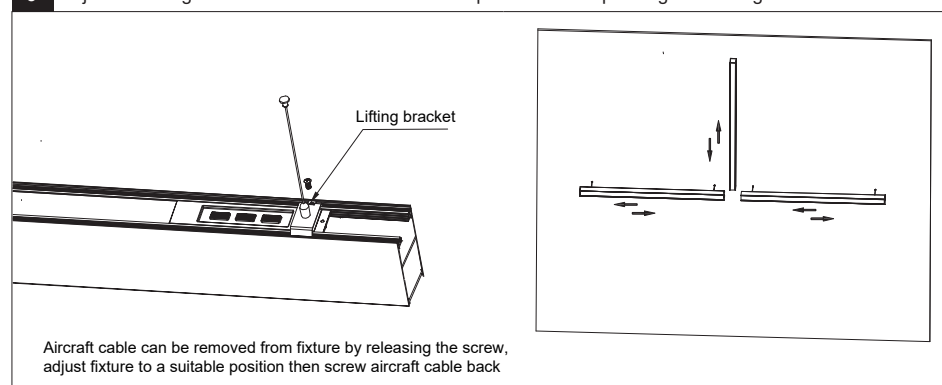

- 6** Insert the "T" joiner into the fixture as shown below, and pull the lock buckle to splice fixtures

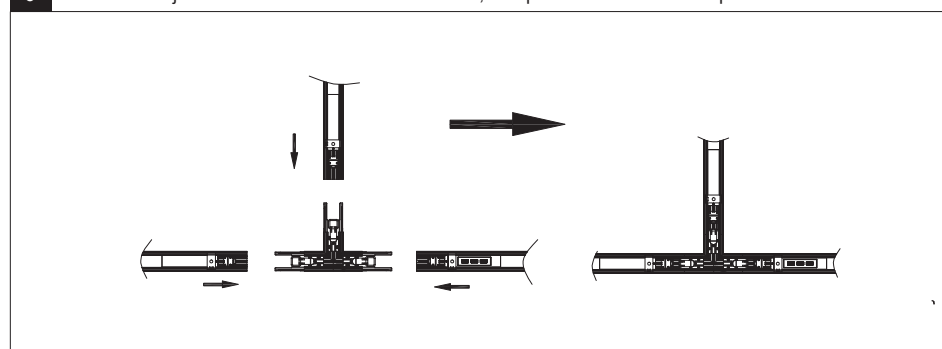

- 7** Make electrical connection of fixture and "T" joiner with male-female connectors.

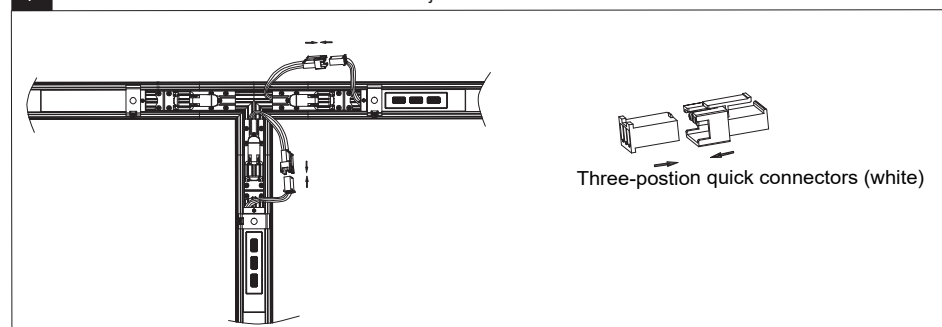




Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


Wiring Diagram

Line
Voltage

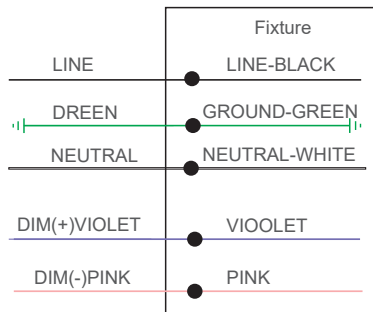


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.


8 Cut off the connectors in one of end for wiring to line voltage.

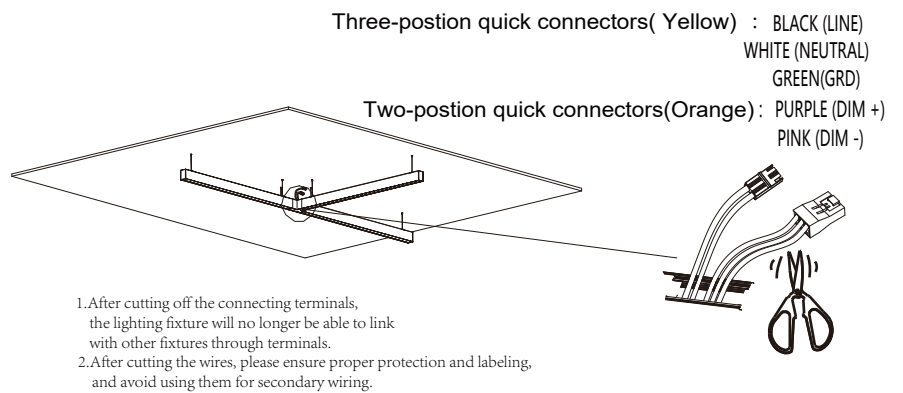


9 Screw back the cover of "T"joiner, lock back the fixture upper cover, and Lock back the other end of fixture upper cover

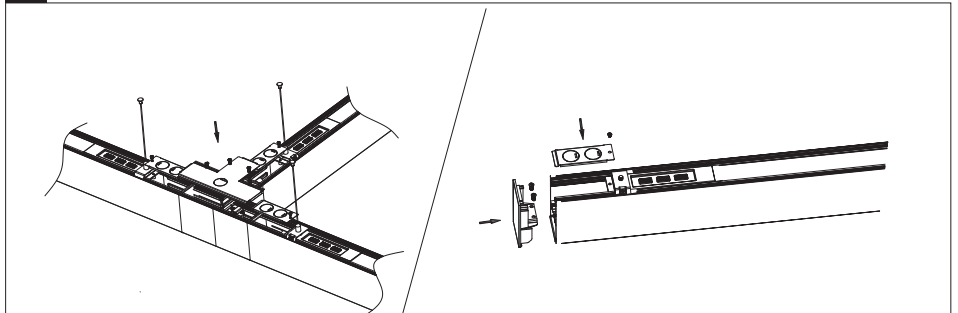

10 Make wiring according to diagram.

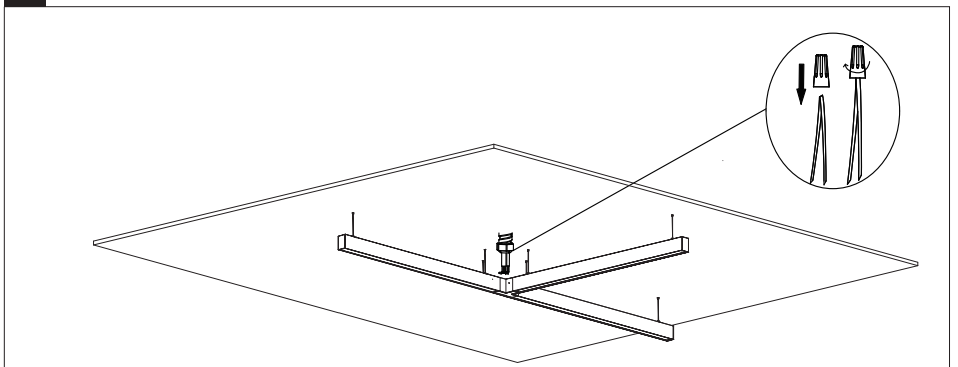

11 Installation completed

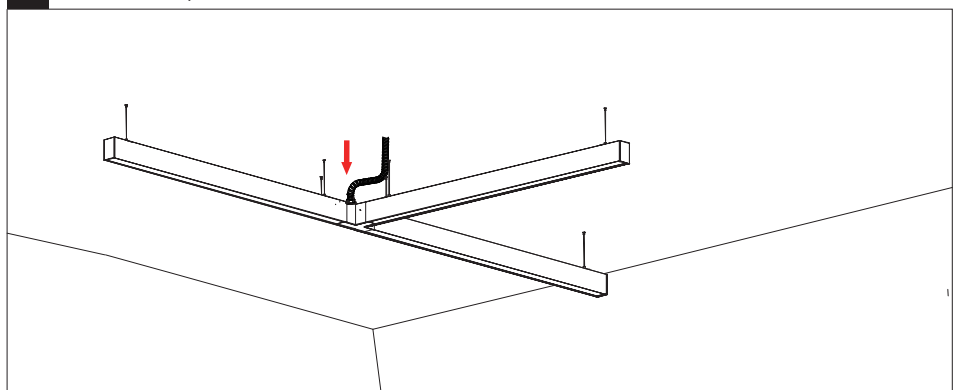





Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.

Installation



- 1** Back to 6th step, before install T joiner, insert the ground wire into T joiner as shown in the following figure.

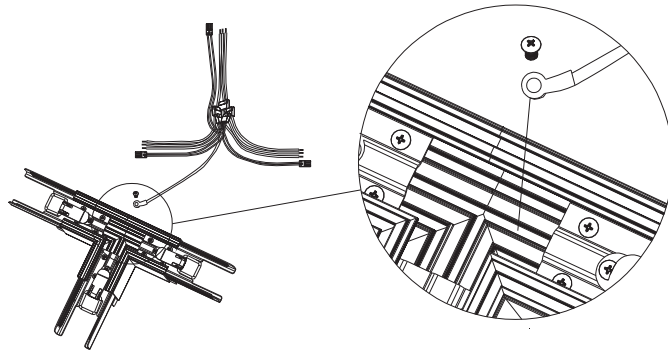

- 2** Insert the terminals according to the position of the fixture.
Be sure to insert all wires into the opposite terminals to avoid the risk of electric shock when exposed.

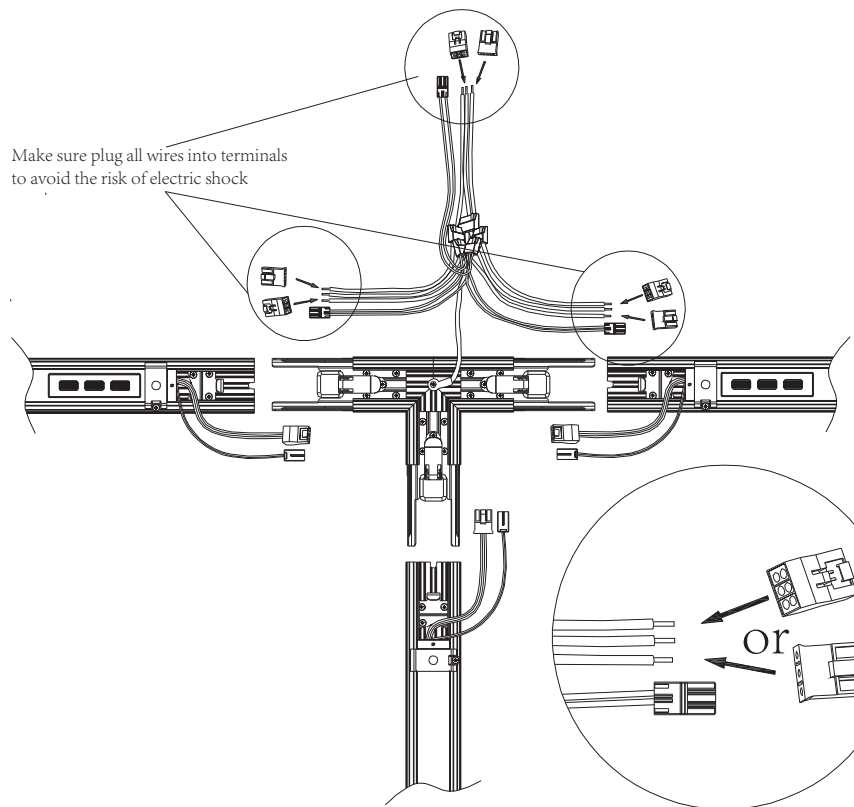


- 3** Insert the splices into the lamp in sequence and lock them with locking buckles.

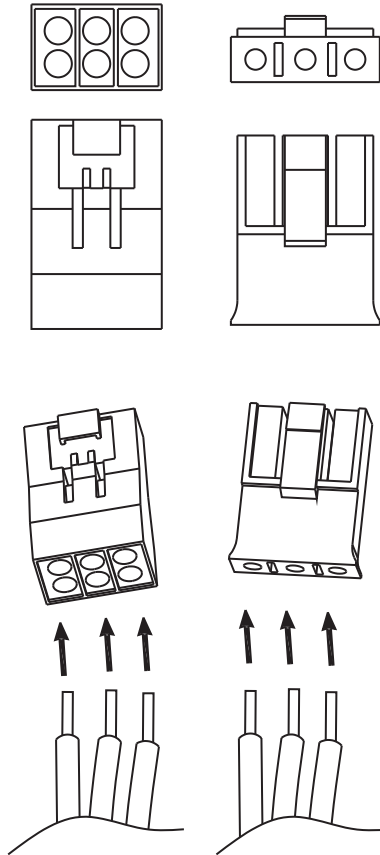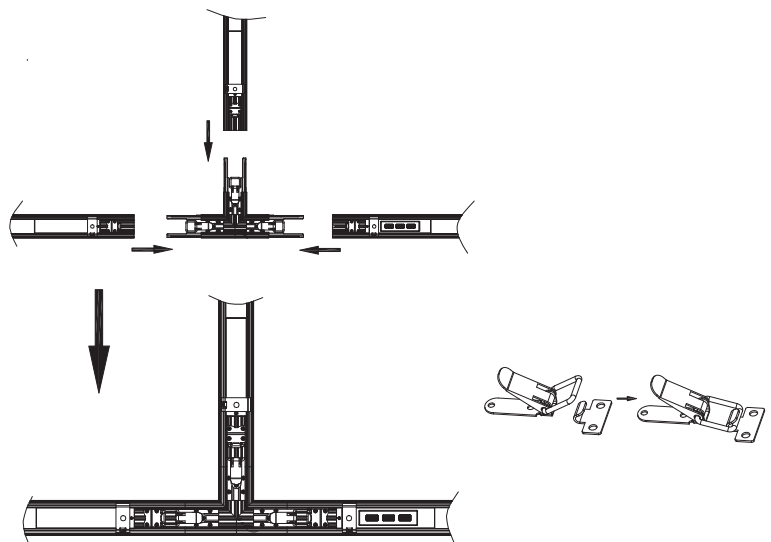


Warning:

1. Make sure plug all wires into terminals to avoid the risk of electric shock
2. Insert the wire into the terminals based on the color of the terminal and the color of the wire. After insertion, check if the wire is securely inserted before use.


3-heads wire group

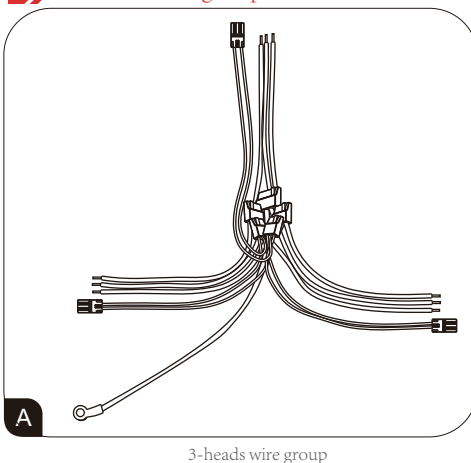

3-heads wire group



Terminal




Terminal




Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


1 Back to the previous operation and insert terminals according to the requirements.

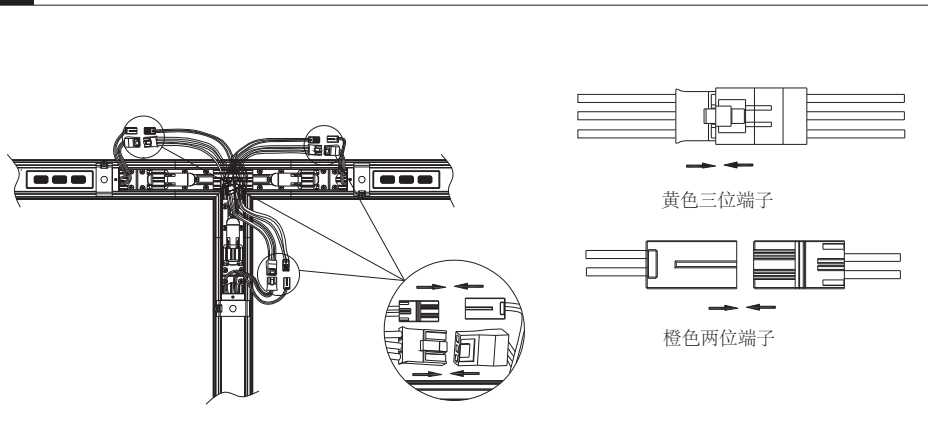


2 please refer to pendant mounting for suspend the fixture.

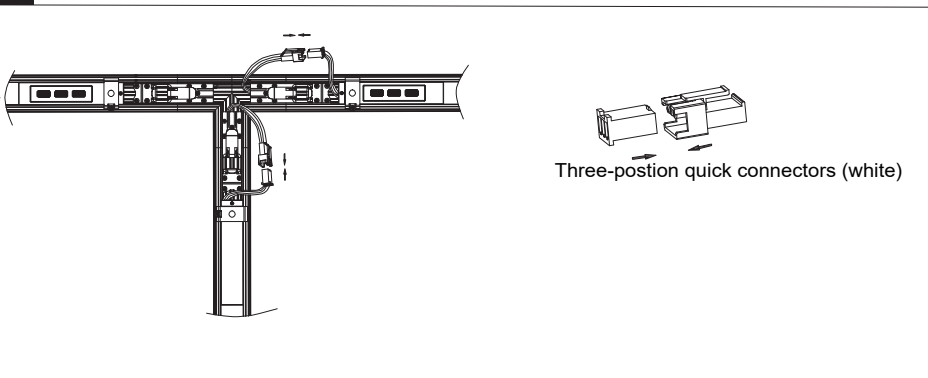

3 Cut off the connectors in one of end for wiring to line voltage

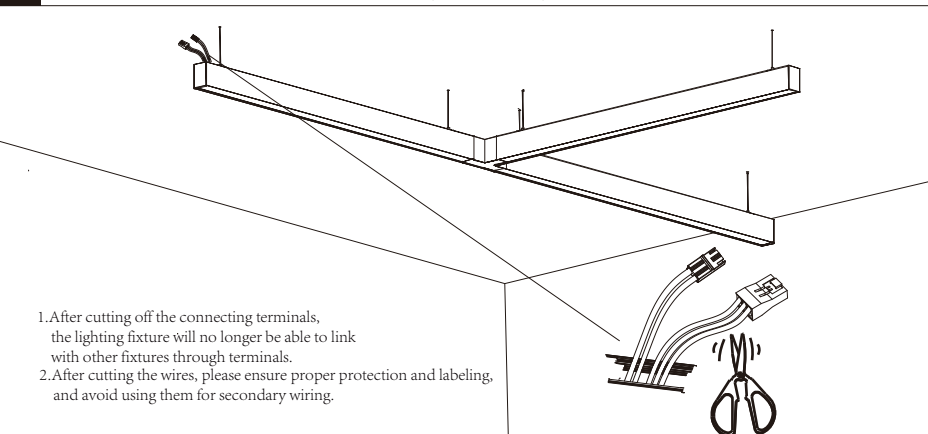

4 Make wiring according to diagram.

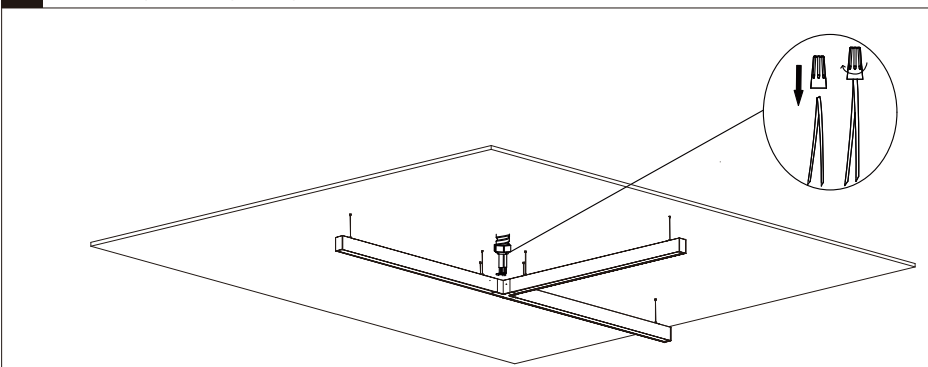

Three-position quick connectors(Yellow) : BLACK (LINE)
WHITE (NEUTRAL)
GREEN (GRD)
Two-position quick connectors(Orange) : PURPLE (DIM +)
PINK (DIM -)

Wiring Diagram

Line Voltage	Fixture
LINE	LINE-BLACK
GREEN	GROUND-GREEN
NEUTRAL	NEUTRAL-WHITE
DIM(+)VIOLET	VIOLET
DIM(-)PINK	PINK



1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.