

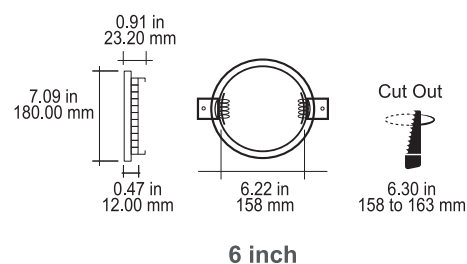


Recessed LED Slim Panels

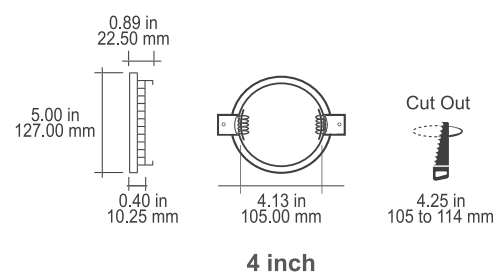

Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DS-36-5CCT-WH	90-130 VAC	6 W	530 lm	120°	5CCT Adjustable	White	3 inch
CL-DS-49-5CCT-WH	90-130 VAC	9 W	800 lm	120°	2700K	White	4 inch
CL-DS-49-5CCT-BL	90-130 VAC	9 W	800 lm	120°	3000K	Black	4 inch
CL-DS-49-5CCT-WH	90-130 VAC	9 W	800 lm	120°	3500K	Black	4 inch
CL-DS-49-5CCT-WH	90-130 VAC	9 W	800 lm	120°	4000K	Black	4 inch
CL-DS-612-5CCT-WH	90-130 VAC	12 W	1060 lm	120°	5000K	White	6 inch

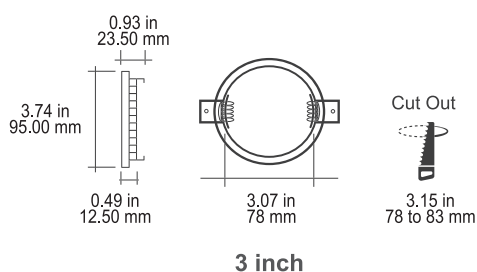

- Low-profile durable aluminum body
- Isolated driver, prevents electric shock
- Suitable for wet locations
- Triac dimmable subject to proper dimmer
- IC rated, safe to be in direct contact with insulation
- Compatible with soffit installation and can be plenum installed in shallow spaces
- IP 20
- PF >0.90
- CRI >85
- cETL approved
- No flicker
- FT4 wire, Airtight
- Lifetime >50,000 hrs
- 5-Year Warranty