

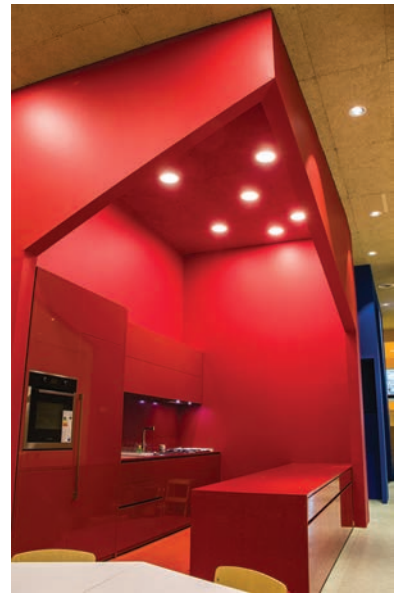
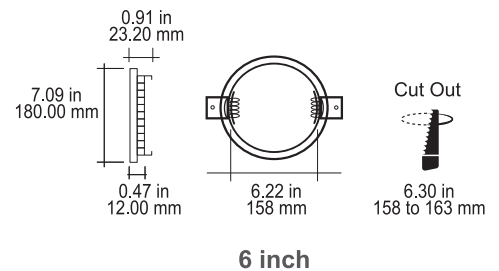


# Recessed LED Slim Panels

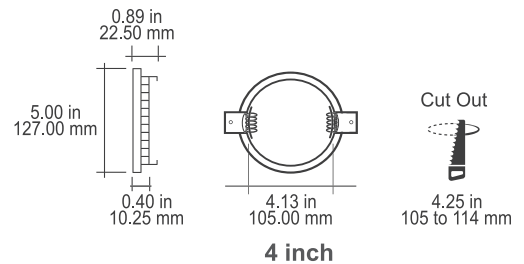

Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DS-36-5CCT-WH	90-130VAC	6 W	530 lm	120°	5CCT	White	3 inch
CL-DS-49-5CCT-WH	90-130VAC	9 W	800 lm	120°	Adjustable	White	4 inch
CL-DS-49-5CCT-BL	90-130VAC	9 W	800 lm	120°	2700K	Black	4 inch
CL-DS-612-5CCT-WH	90-130VAC	12 W	1060 lm	120°	3000K	White	4 inch
CL-DS-612-5CCT-BL	90-130VAC	12 W	1060 lm	120°	3500K	White	6 inch
					4000K	Black	6 inch
					5000K	Black	6 inch

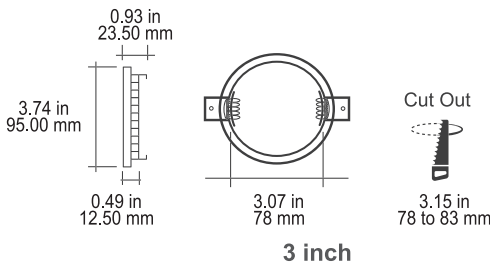

- Low-profile durable aluminum body
- Isolated driver, prevents electric shock
- Safe to be in direct contact with insulation
- Compatible with soffit installation and can be plenum installed in shallow spaces
- FT4 wire, Airtight
- No flicker
- cETL approved