

STANDARD | Fold Series




CL-Fold12



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K 2700K 4000K	12° 34° 48°	1440LM


■ Sandy Black □ Sandy White

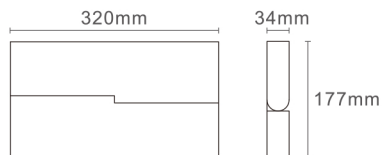

LIGHT DISTRIBUTION


3000K 90Ra

12°




h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06

34°



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14

48°



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95