

STANDARD | Fold Series



CL-Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K 2700K 4000K	Diffuse	1270Lm


 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

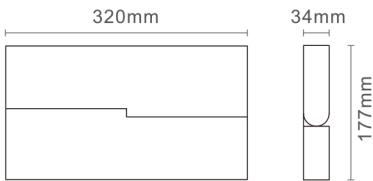

Diffuse



h(m)	E(lx)	Φ(m)
1	487	Φ2.50
2	121	Φ5.01
3	54	Φ7.52
4	30	Φ10.02
5	19	Φ12.53