

STANDARD | Linear Series




CL-Linear64



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 90	< 3	3000K 2700K 4000K	Diffuse	1720Lm


 Sandy Black  Sandy White

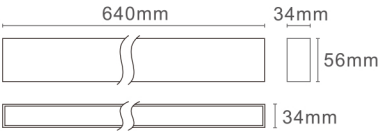

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	661	Φ 2.47
2	165	Φ 4.94
3	73	Φ 7.41
4	41	Φ 9.88
5	26	Φ 12.36