

STANDARD | Linear Series




CL-Linear96



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 90	< 3	3000K 2700K 4000K	Diffuse	2550Lm


Sandy Black
 Sandy White

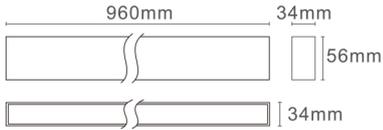

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(x)	Φ(m)
1	962	ø2.53
2	240	ø5.06
3	107	ø7.60
4	60	ø10.13
5	38	ø12.66