

Up & Down LED Linear Light




Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.


Safety Instructions

1. Read this instruction carefully before installation
2. Installation should be in accordance with national and local electrical laws and regulations
3. Product should be installed by qualified and licensed electrician
4. Do not install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance
6. To reduce the risk of fire and overheating, make sure all connections are tight
7. Fixtures should not be covered with thermal insulation pads or similar materials at any circumstance
8. Do Not use out doors


Function description of the control board

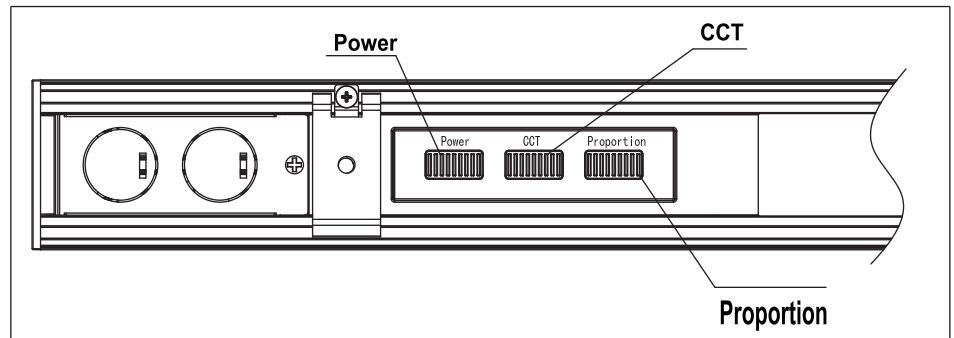


Parts List



Wire Nuts




orange terminal
DIM+(Purple)
DIM-(Pink)



Yellow terminal
L(Black)
Ground wire (Green)
N(White)




12V(Orange)



white terminal
Wiring for connection parts

Size	Power	Working Current	Input Voltage	Luminous Efficacy	CCT	Uplight Proportion
2FT	15/20/25W	0.229A	AC120-347V	130lm/W	3000K/ 3500K/ 4000K	0%/10%/30%
4FT	30/40/50W	0.367A				
8FT	60/80/100W	0.916A				

Cautions before Installation

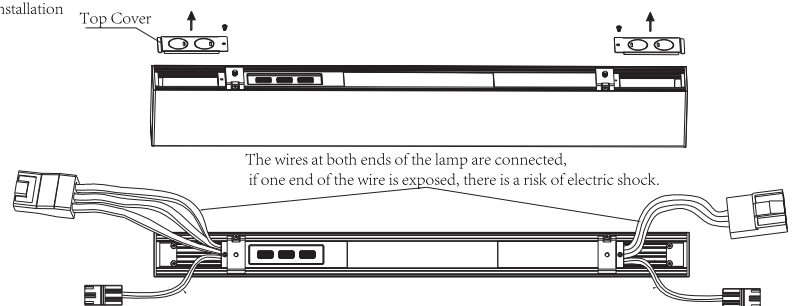

1. Open the top cover and check if the wires at both ends are securely connected to the terminals. Do not use if the wires are exposed.
2. Please turn off the power before testing the operation of the lighting fixtures, and do not touch any part of the fixtures to avoid the risk of electric shock.

Wiring Direction Indication:

