


Up & Down LED Linear Lights



Adjustable Proportion	
DOWN 100%	UP 0%
DOWN 90%	UP 10%
DOWN 70%	UP 30%

Product Code	Power	Lumen	CCT	Beam angle	Length
CL-LL1-225-3CCT	Adjustable 15/20/25W	130lm/W	3CCT	120° Diffused	2 ft
CL-LL1-450-3CCT	Adjustable 30/40/50W	130lm/W	Adjustable 3000K 3500K 4000K	120° Diffused	4 ft
CL-LL1-8100-3CCT	Adjustable 60/80/100W	130lm/W	4000K	120° Diffused	8 ft

- Body Color available in Black and White
- Seamless connection
- Input Voltage: 120-347VAC 50/60Hz
- Bridgelux LED chip
- Flicker free isolated driver
- Pendant/Surface/Recessed/Wall-mount/T-bar installation kits are available
- cUL Certificate

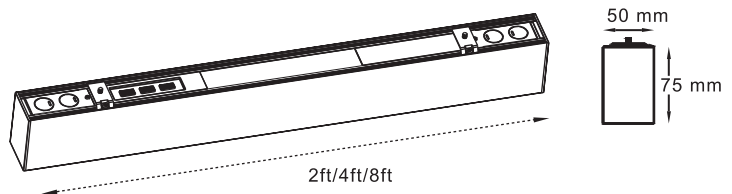

AC
120-347V
50/60Hz

0-10V
DIMMABLE

CRI
> 90

5
YEARS
WARRANTY

Lifetime
>50,000 hrs

-20°C +40°C

Working Temperature