


! Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.

Notice


1. Read these instructions carefully before installation. Ensure the installation complies with national and local electrical laws and regulations.
2. The product must be installed by a qualified and licensed electrician.
3. Do not install in humid areas; this product is designed for dry, non-humid environments only. Always turn off the power supply before installation or maintenance.
4. To reduce the risk of fire and overheating, ensure all connections are secure.
5. Fixtures must not be covered with thermal insulation pads or similar materials under any circumstances.
6. Do not touch the fixture during trial operation to avoid potential danger.
7. This product is not suitable for outdoor use.

Parts List

Hanging plate accessories

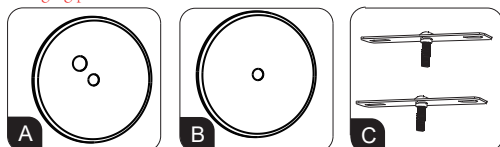

A Double hole hanging plate B Single hole hanging plate C Mounting brackets

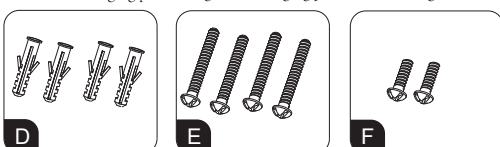


D Expanding rubber stopper E Long screws F Short screws




G Ground wire screw

Driver's wires package(optional)

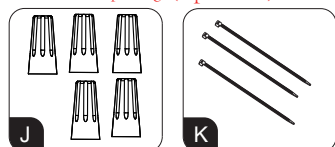


J Wire Nuts K Ties

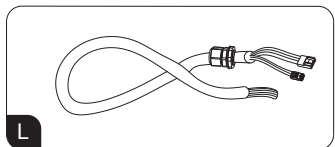


L Wires accessories

Mounting Steps


- 1 Turn off the power before installation, check whether the mounting surface is firm, and then fix the mounting bracket on the mounting surface.

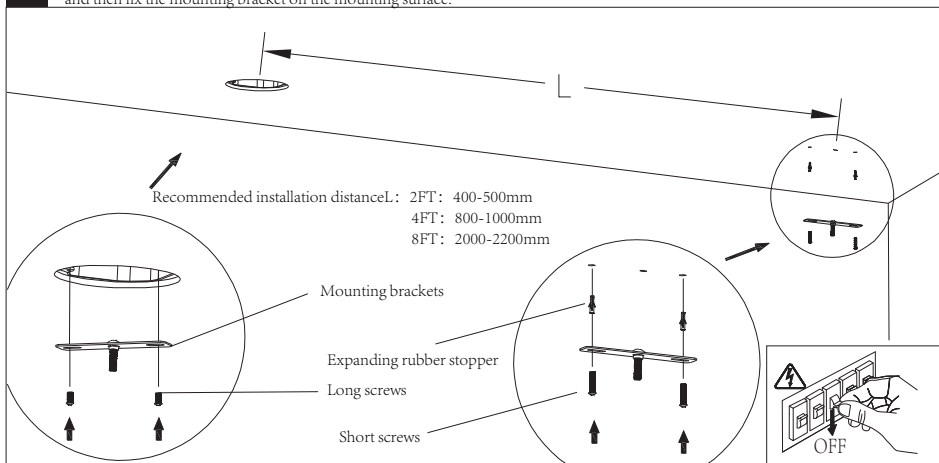


- 2 Remove the upper cover of the lamp, remove the anti-pull connector, and pass the power cord through it in sequence as shown below.

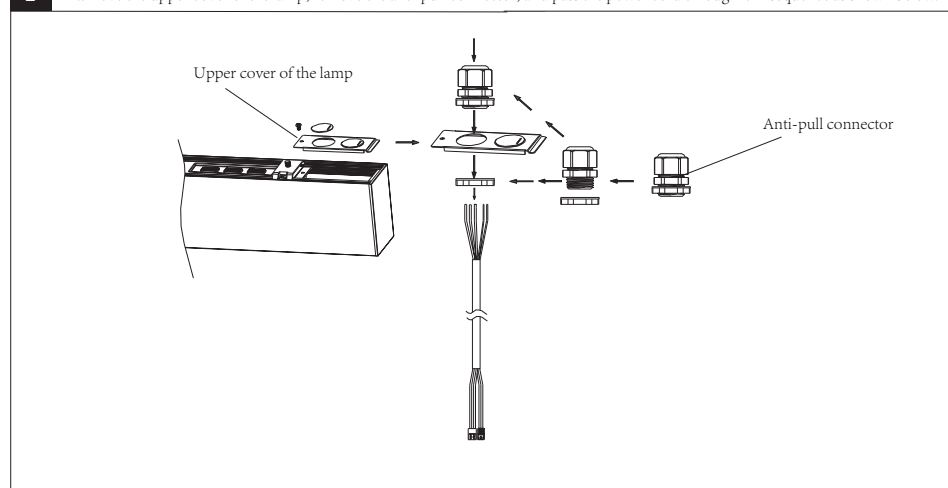

- 3 Pass the power cord through the two-hole hanging plate, twist the mains end ground wire and the ground wire on the power cord assembly together and fix them on the installation bracket by screws

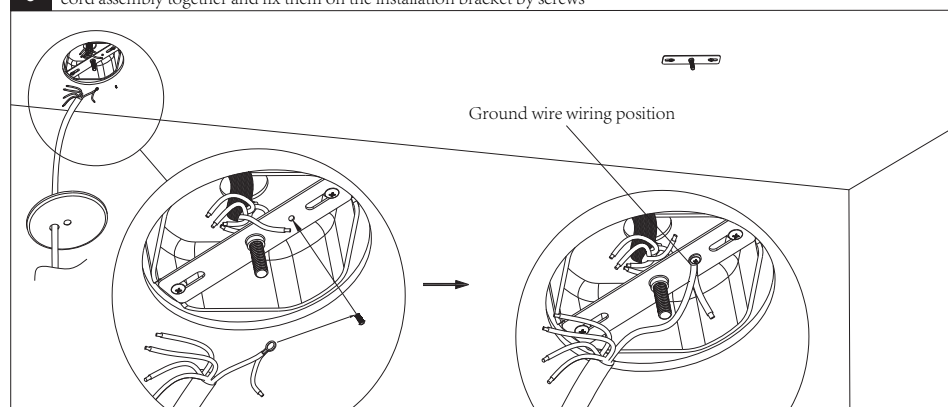

- 4 Wiring according to usage requirements

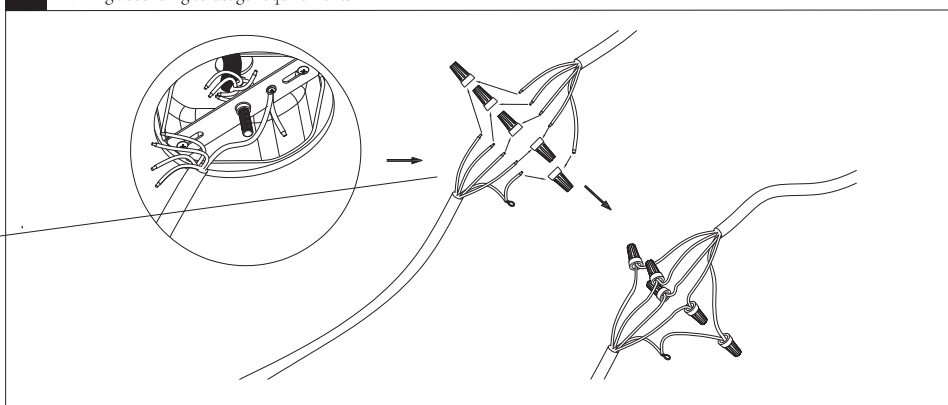

Wiring Diagram

Line Voltage		Fixture	
LINE		●	LINE-BLACK
GREEN		●	GROUND-GREEN
NEUTRAL		●	NEUTRAL-WHITE
DIM(+)/VIOLET		●	VIOLET
DIM(-)/PINK		●	PINK




1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.



Risk of fire and electricity The installation must be done by electricians or professionals Turn off the power supply before operation.

Wiring Diagram

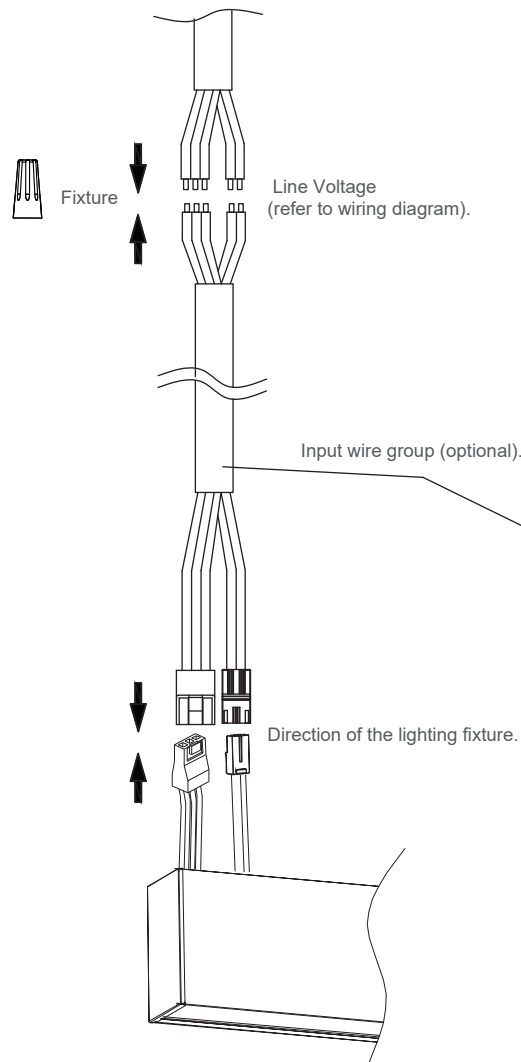


Three terminals: neutral wire, live wire, ground wire
Two terminals: DMI+ (purple), DIM- (pink)




1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.


- 5 Use one end of the hanging rope and screw it into the mounting bracket to fix the hanging plate.

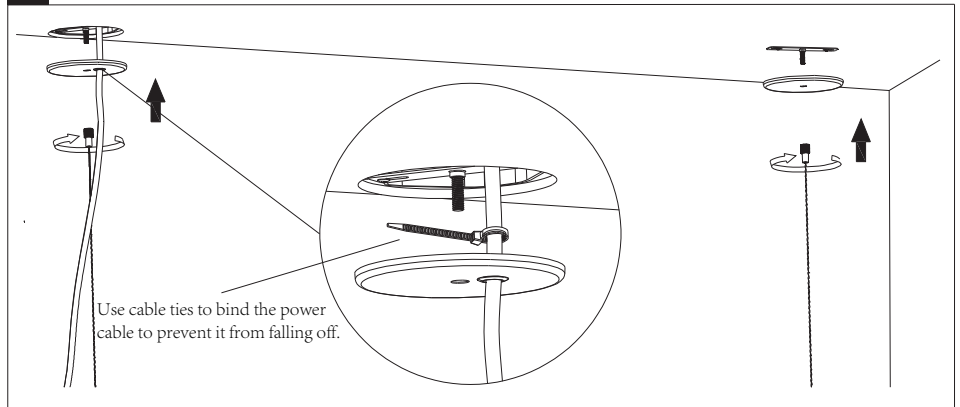

- 6 The other end of the hanging rope assembly fixes the lamp body

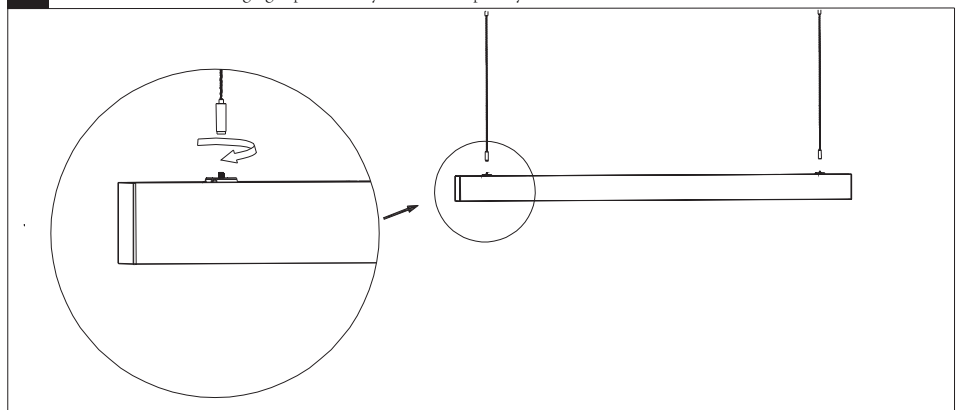

- 7 The installation is completed after wiring according to the wiring section of the hoisting installation instructions.

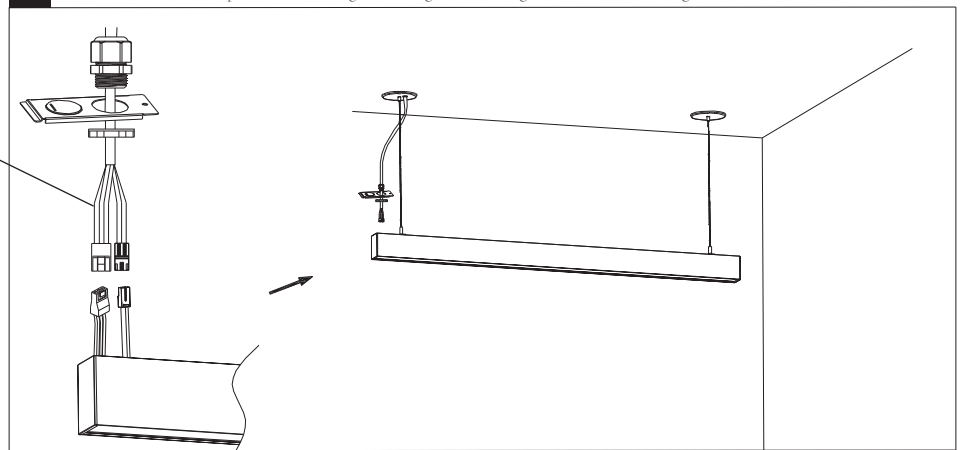

- 8 Use cable ties to organize the sling and power cord, and the installation is complete.

