





LED SHEET CL-LSH-784-4824-TW


Product Code	Input Voltage	Power	Lumen	Color Temp	LEDs/Sheet	Dimension
CL-LSH-784-4824-TW	24V DC	20W	1600lm	Tunable 2700K~6000K	784xSMD2835	(LxW) 480x240mm

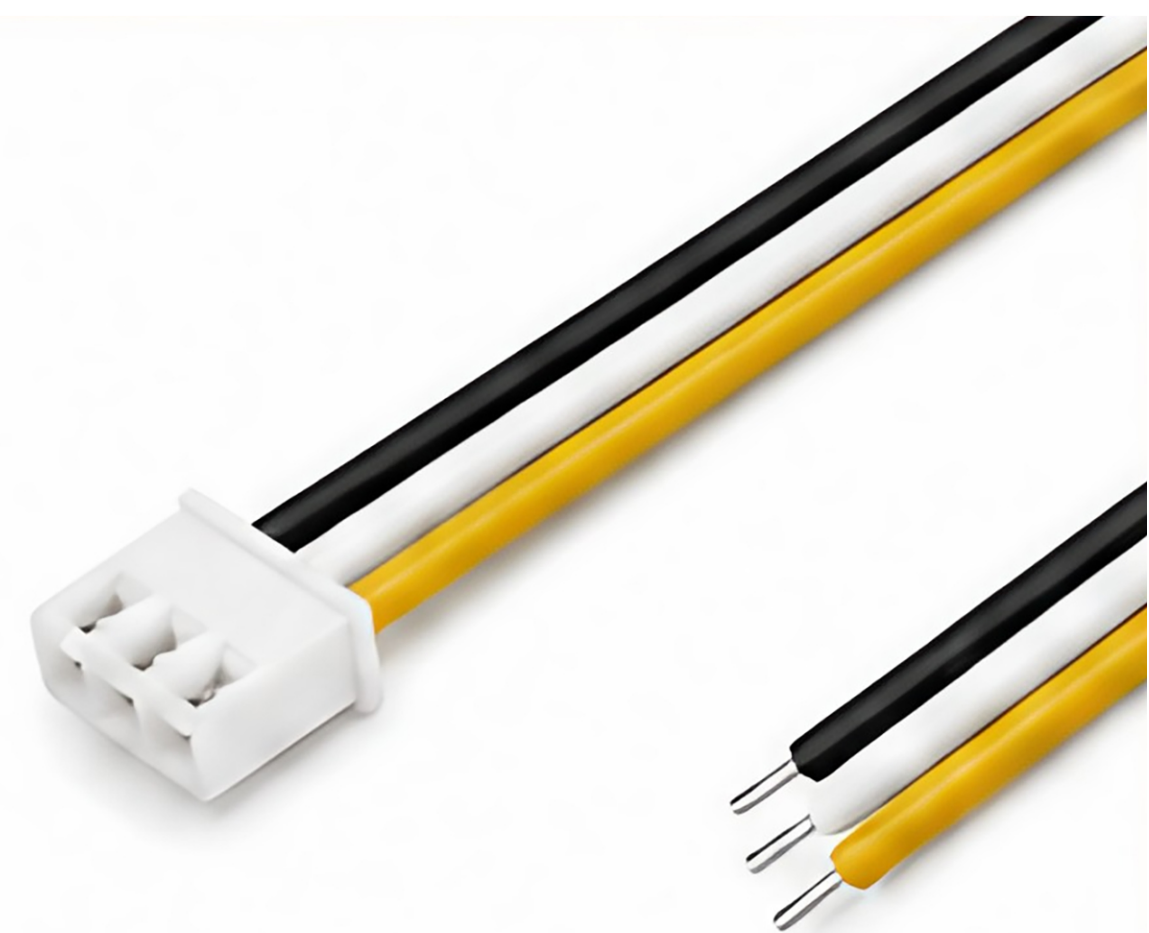

CL-LSH-3P-XBW30
Single head connector with 30cm wire, 20Awg, 3-pin

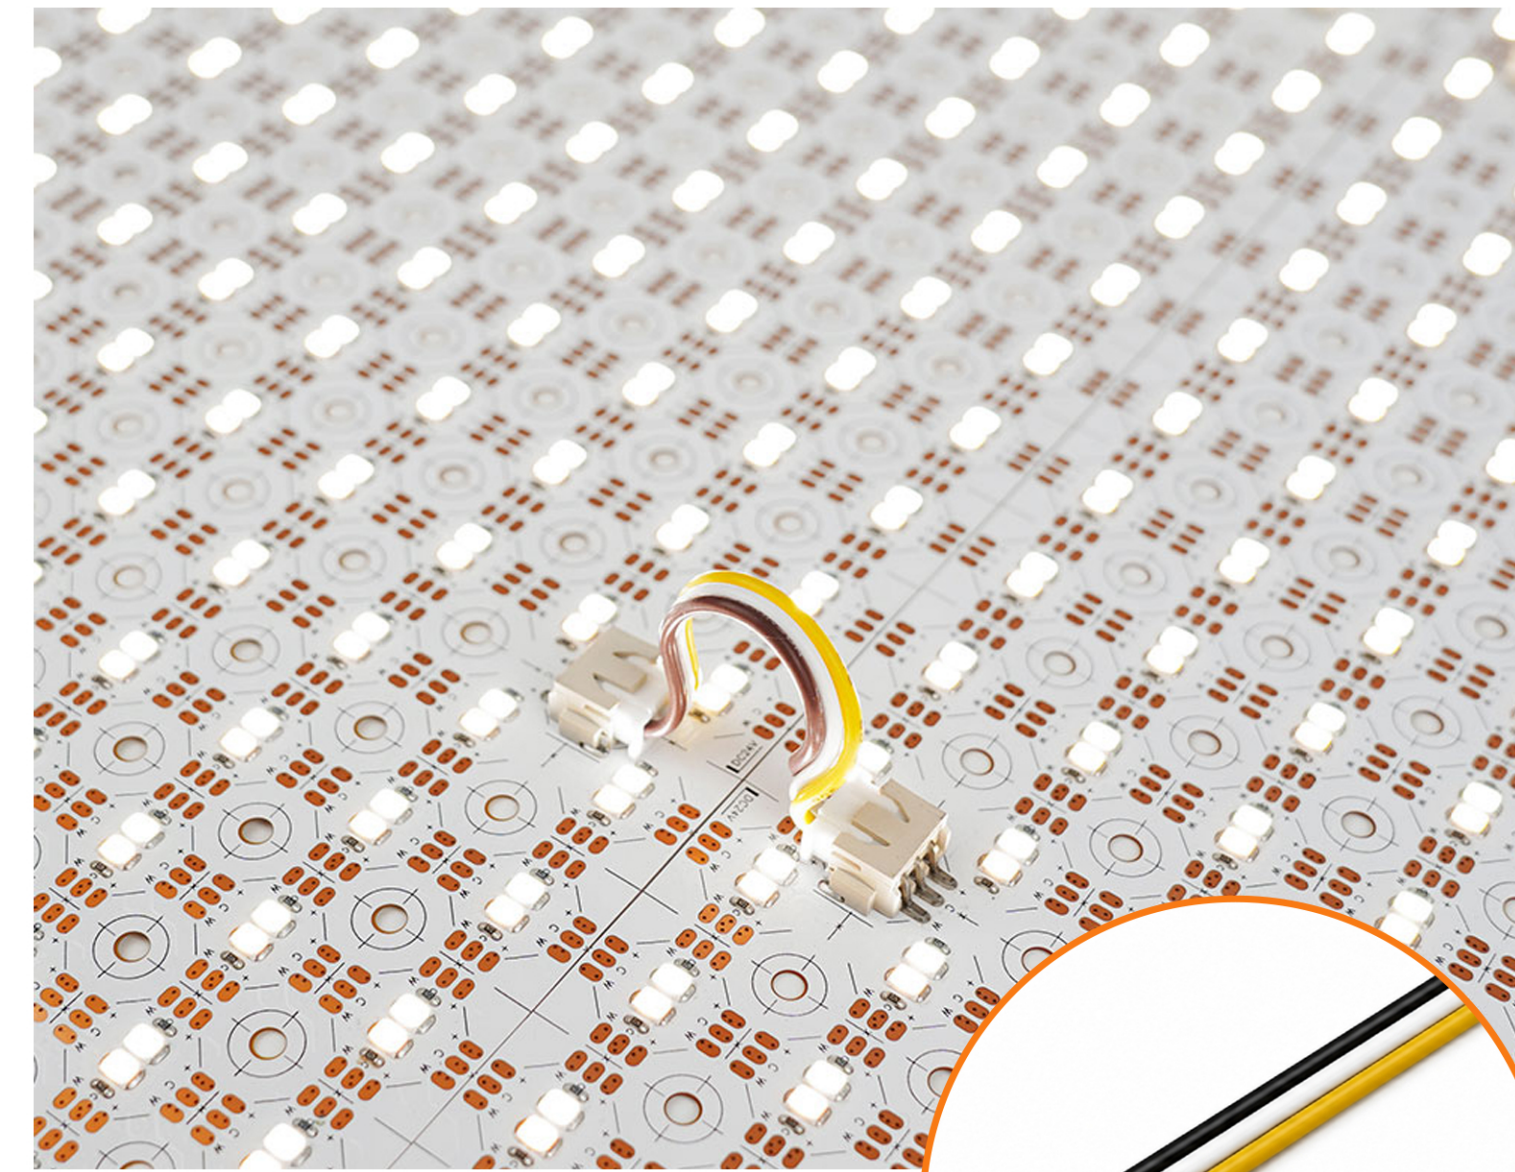

CL-LSH-3P-BBW
Double head connector with 6cm/30cm wire, 20Awg, 3-pin

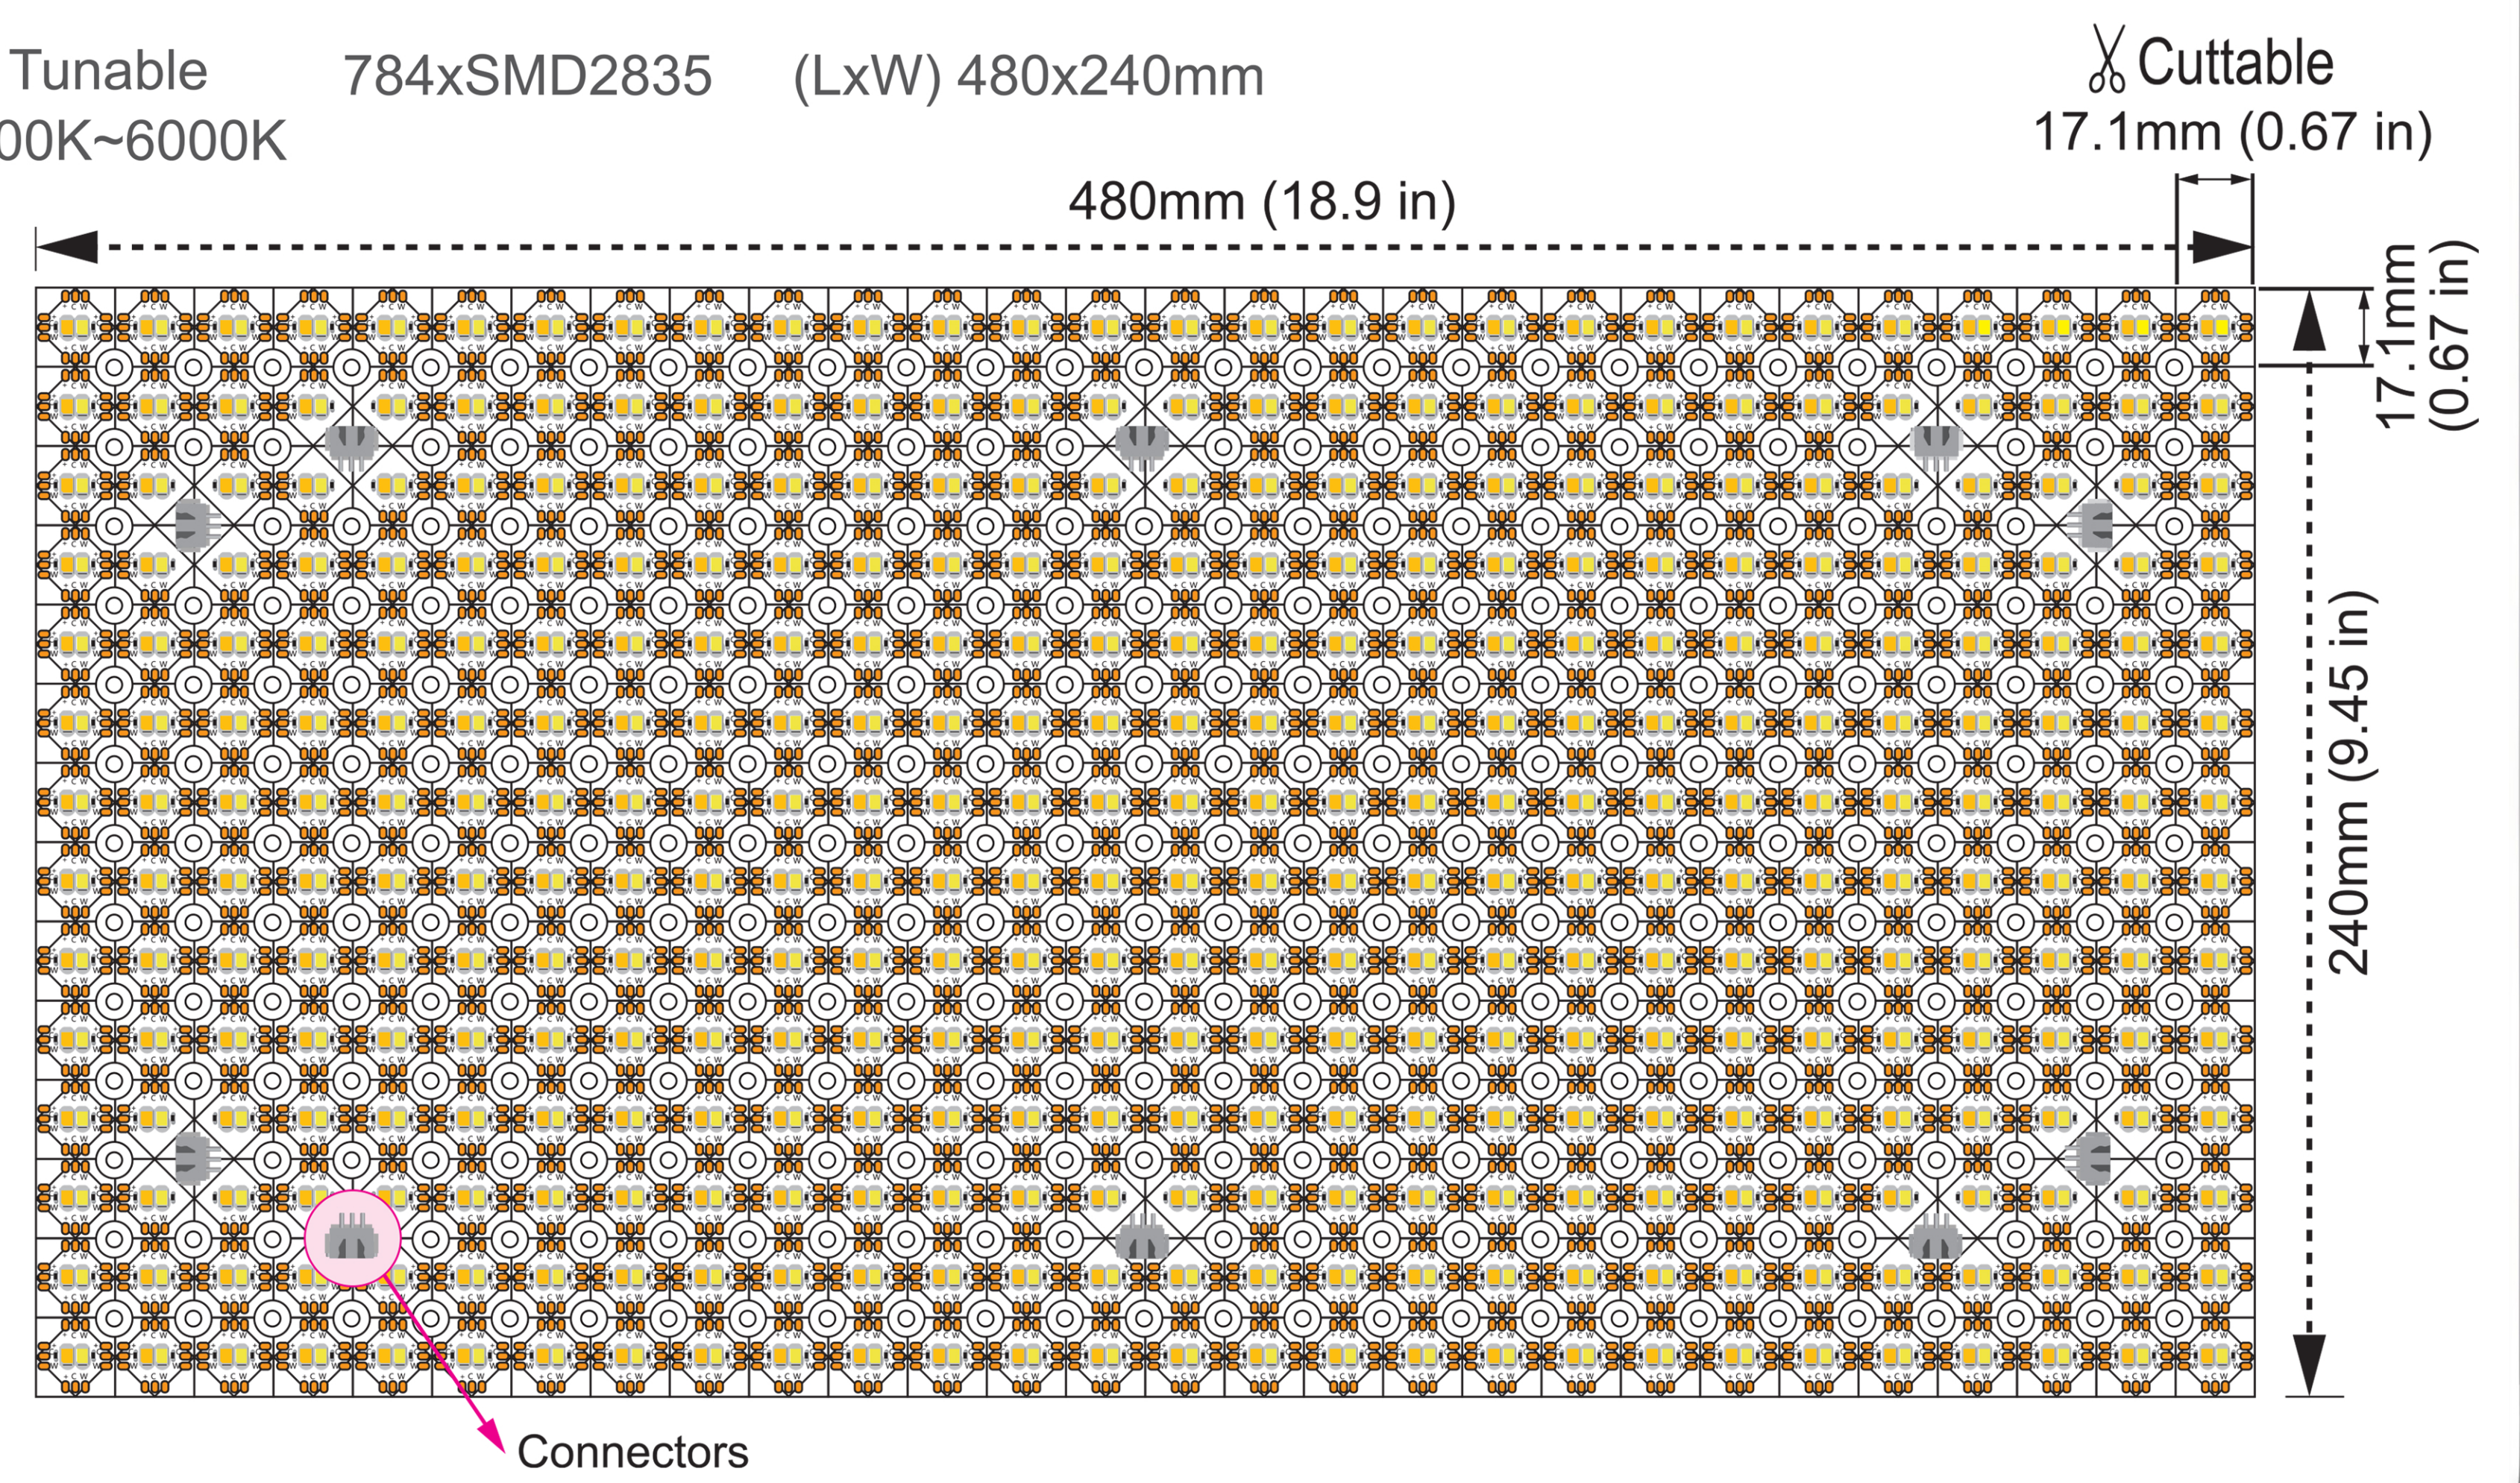


1- Single Feed:

A single power supply point support up to 5pcs of LED Sheets

Power Supply

Connect the Single head connector to the power supply

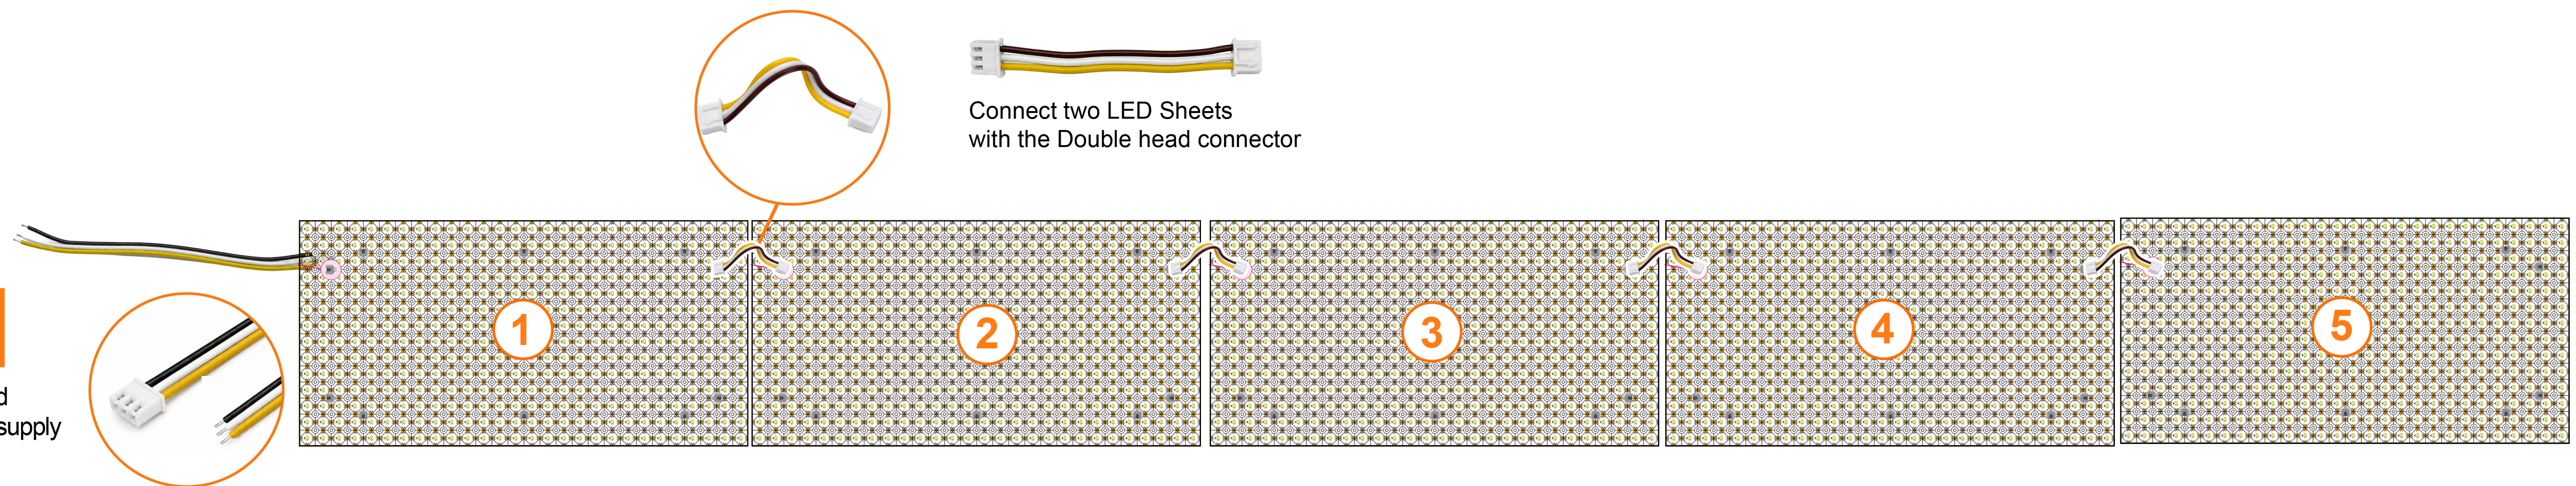


Connect two LED Sheets with the Double head connector

2- Double Feed:

Double power supply point support up to 10 pcs of LED Sheets

Power Supply

Connect the Single head connector to the power supply

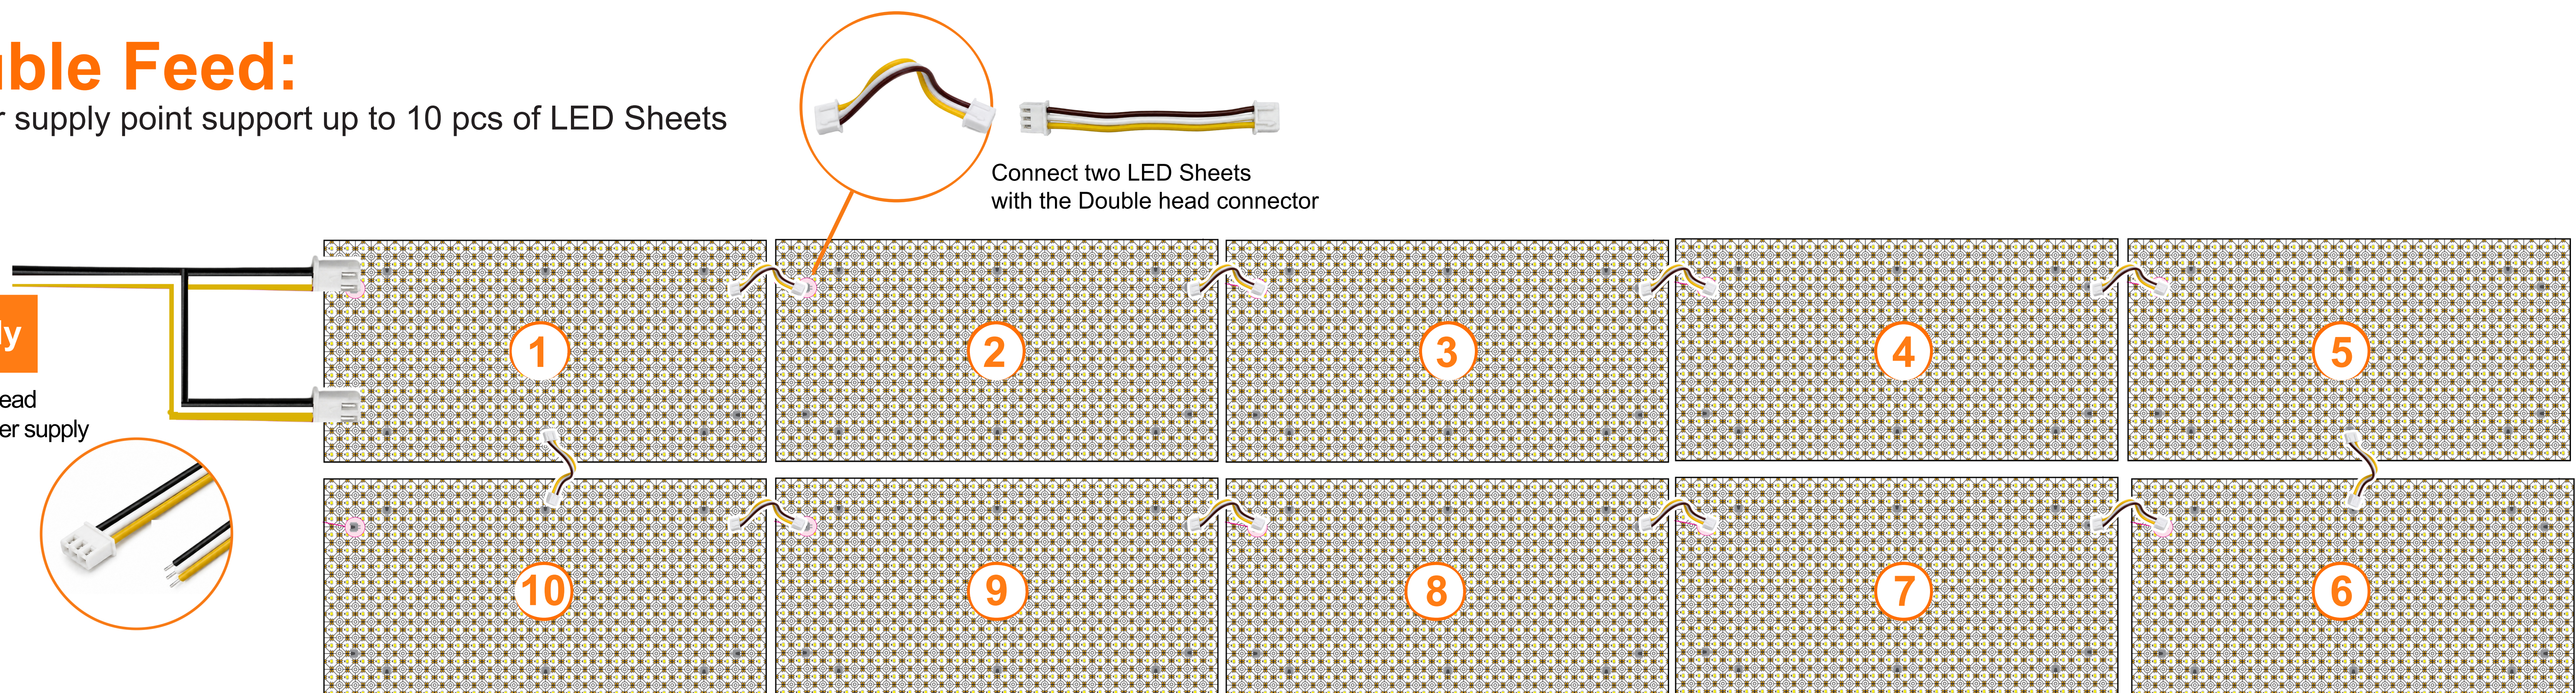

Connect two LED Sheets with the Double head connector