POWER SUPPLY

CL-MDR-CV-60W-24V-VRDIM

Constant Voltage Dimmable LED Driver (5 in 1 Dimming)

INPUT	**100-277V AC** 50/60Hz 0.75A max
OUTPUT	**24V DC 2.5A** Min load: 20% total power
POWER	**60W**
POWER FACTOR	**>0.95**




DIMMING


Triac/Phase, 0-10V/1-10V,10V PWM, Potentiometer
Output Dimming Frequency: 20 kHz
Designed to minimize audible noise and provide smooth, stable dimming performance.

VR DIMMING: Voltage Reduction Adjustment

Suitable for Dry, Damp and Wet locations.

DIMMABLE · CE · RoHS · c UL us LISTED · FC · Class2 · ClassP · 5 YEAR WARRANTY

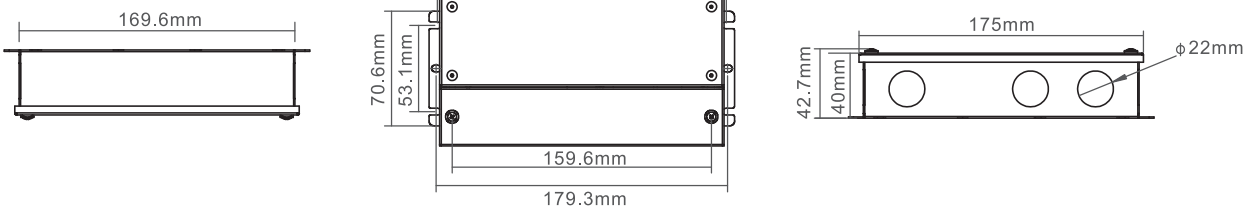

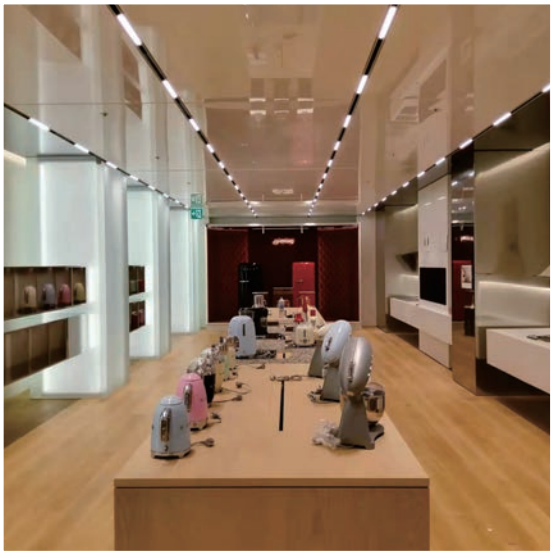



IMPORTANT: Canolight MDR and Driver box series are specifically approved for the Canolight Magnetic Track System.
Use of non-approved drivers may cause audible noise or improper system performance and will void the system warranty.