


Track Lights Installation






Choose your preferred color temperature using the slide switch.



1 2
3




Installation completed.


H-Style:

1. To install the connector, place it into the track groove and ensure that the side with the locking clip is opposite to the polarity groove on the track.
2. Push towards the track and turn counter-clockwise 90 degrees.
3. To remove the fixture, pull the locking clip downwards (away from the track) and turn clockwise 90 degrees.
4. After assembly, turn on the power to confirm that the fixture is working properly.

Lens Replacement



To remove the trim and lens, rotate to the left.



Replace the removed lens with the preferred lens.

1 2
3 4




To tighten the trim and lens, rotate to the right.



The replacement completed.

LED TRACK LIGHT USER GUIDE

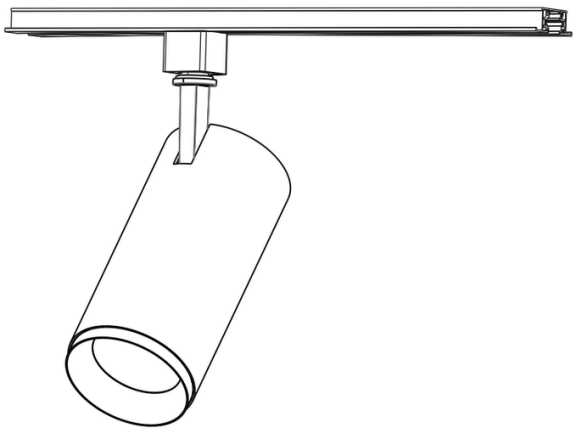

canolight
Canadian Brightness

Important Safety Instructions

When installing or using this track system, always follow basic safety precautions, including the following:

1. Read all instructions.
2. Do not cut any track sections.
3. For indoor use only. Do not install this track in damp or wet locations.
4. Do not install any part of a track system less than 5 feet above the floor.
5. Do not install any luminaire assembly closer than 6 inches from any curtain or similar combustible material.
6. Turn off power before installation or before doing any maintenance work.
7. Do not exceed the nominal supply voltage or amperage ratings.
8. Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.
9. Do not connect a track to more than one branch circuit unless the track is constructed so that it can be used with more than one branch circuit. Check with a qualified electrician. Although the track lighting system may seem to operate acceptably.
10. Wear rubber-soled shoes and work on a sturdy wooden or non-conductive ladder.
11. Product must be mounted in location and at height in a manner consistent with its intended use, and in compliance with the National Electrical Code and local building codes.

Installation Procedure


WARNING

1. Switch Off before installation.
2. Only switch on after installation and circuit examination.
3. Installation and maintenance by a professional electrician only.




Wiring Diagram

3-wires , 1-circuit

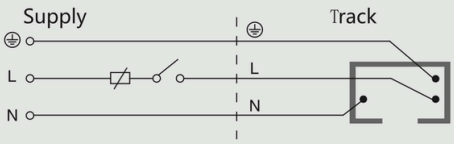

1-phase, 1-circuit, 120V AC, 20A , 3.7kVA

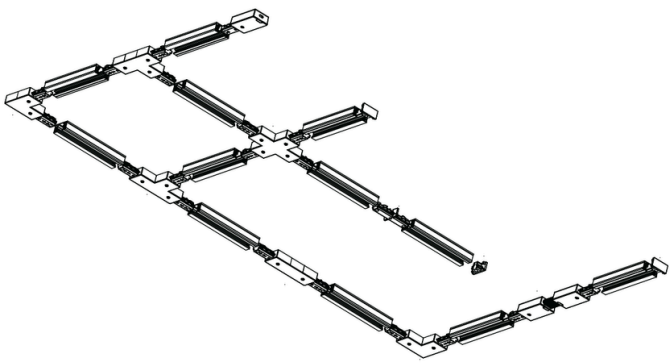

Note: Do not install in the place near heat source, or in corrosive gas environment.

Installation for track

