

art light

FOLDABLE









FLOOR LAMP



















NOTICE

- 1. The product is only suitable for indoor use, avoid long time work in humid environment;
- 2. Do not soak the product in water or other liquids;
- 3. When installing, the screws need to be locked firmly;
- 4. Install the product in the room temperature;
- 5. The adapter needs to be connected in place, there must be no looseness or poor contact;

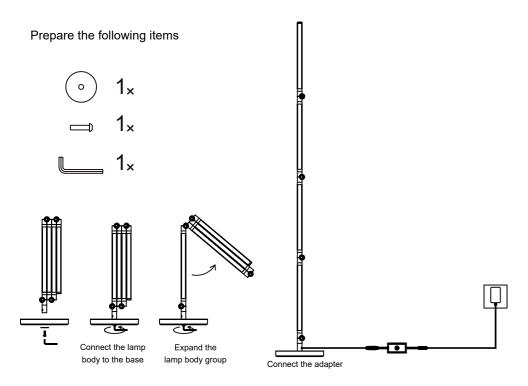







Installation steps


2. Stick the folding lamp to the wall and draw some points.












3. Drill four holes on the four points that have been drawn with an electric drill, insert rubber plugs, and screw in screws with the buckles stuck to the wall.



4.Install the folding lamp in the buckle, Connect the controller and connect the adapter










PARAMETER

Product Model	ART-FOLD-24
Power	24W
Input Voltage	100-240-V ∼50-60/HZ
Input power	20~24W
Output DC voltage	12V
Output current(A)	1.75A±5%
Error	±5%
CRI	>80
Light efficiency	1000lm
Power supplier version	American plug

WALL MOUNTED

Prepare the following items



Folding lamp

Buckle

With the base, it can be used as a floor ambient light.



The lamp posture can be adjusted based on the customer's preference, which can be hung on the wall as a wall ambient light.

ONE LIGHT FOR MULTIPLE USING SCENERIOS




With the base, it can be used as a floor ambient light.

11



DIMENSIONS (unit: inch)

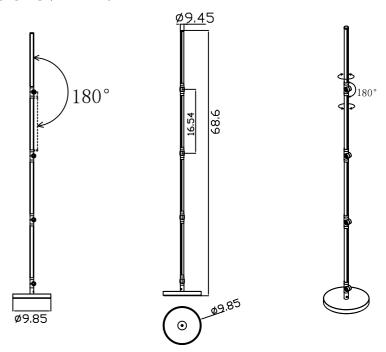


PC light mask, anti-aging & yellowing, frosted surface, soft light output.



American plug

The lamp pole is made of aviation aluminum alloy AL6063, which makes it lightweight yet sturdy and rust-resistant Built-in dedicated 301 stainless steel metal damping rotating shaft, with stepless angle rotation and no need for external tools.




CONTROLLER

Long press 5 seconds: folding light flashes red light (waiting for network distribution)




LOCAL MUSIC MODE

rock, jazz, classic, scroll, energy, frequency spectrum, etc and sensitivity can be adjusted.



REMOTE CONTROL (optional)

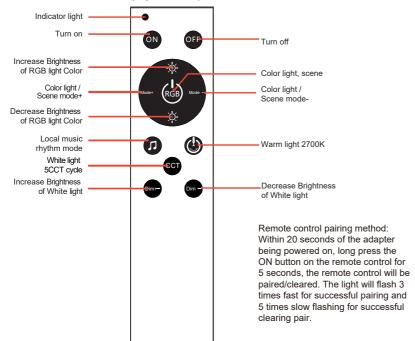

The entire lamp consists of 4 luminous modules. Each module can be rotated horizontally up to 270° and swing vertically up to 180°.

The positioning does not require external tools. The internal rotating shaft part adopts a special metal hinge commonly used in high-tech devices, providing moderate and delicate damping, allowing for adjustment to any angle.

