



At Canolight, we pride ourselves on delivering high-quality, energy-efficient lighting solutions and services. With extensive experience in the lighting industry and a team of skilled professionals, we have successfully provided top-tier lighting equipment for a diverse array of applications, including residential, commercial, industrial, hospitality, retail, resorts, restaurants, cafes, facades, and outdoor spaces. Our products comply with all relevant approvals, safety standards, and certifications in both Canada and the United States.


In addition to premium lighting equipment, we offer professional lighting design services. Our expert team employs advanced design software to calculate and simulate lighting for both interior and exterior spaces, ensuring optimal solutions. We also provide 3D lighting design and simulation services, enabling customers to visualize their lighting setup and make adjustments prior to installation. This process guarantees complete customer satisfaction with the final outcome.

At Canolight, our goal is to exceed your lighting expectations. We believe that Canadian brightness is more than just illumination; it's about living sustainably and preserving our planet for future generations



LED Exterior Lights	2
LED Strip Lights	24
Aluminum Profiles	49
LED Track Lights	54
LED Linear Lights	62
LED Downlights	64
LED Step lights	95
LED Vanity Lights	98
Controllers	101
LED Power supplies	103
Industrial Lights	110



Surface-Mount LED Wall Light

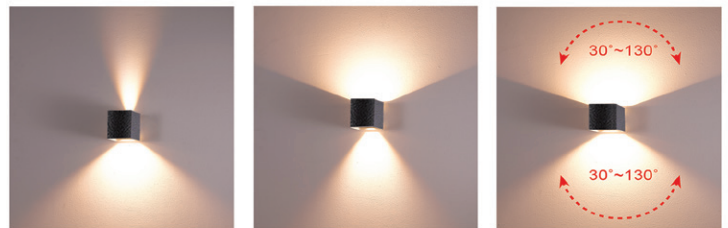

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-2542-10W-3K	110-220VAC, 50Hz	10 W	883lm	3000K	30 ~ 130°

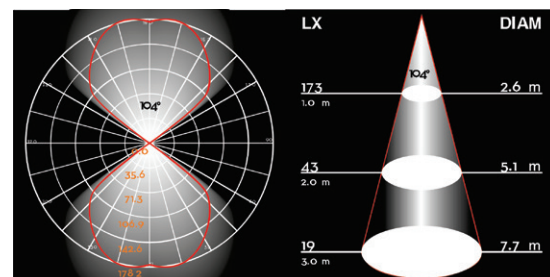
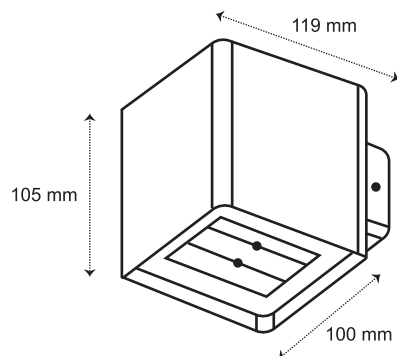


- Pretreated powder coating for outdoor use
- CREE LED chip
- Silicone rubber gasket
- cETL approved

Surface-Mount LED Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-1521-15W-3K	110-220VAC, 50Hz	15 W	1200lm	3000K	100°

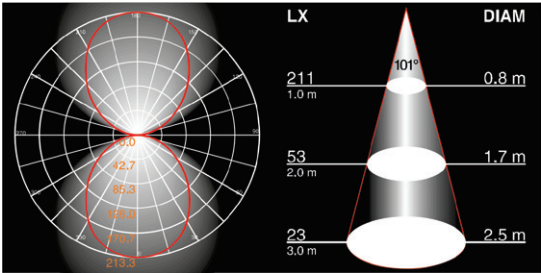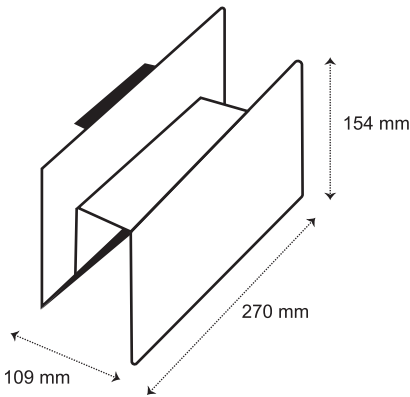

ALUMINUM
DIE CAST

PF
≥0.97

CRI
>80

IP54


5
YEARS
WARRANTY

Lifetime
>50,000 hrs



-25°C +50°C
Working
Temperature

- Pretreated powder coating for outdoor use
- PHILIPS LED chip
- Silicone rubber gasket
- cETL approved
- Designed by Franco Pagliarini

Surface-Mount LED Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-2442A-4W-3K	110-220VAC, 50Hz	4 W	321lm	3000K	11°

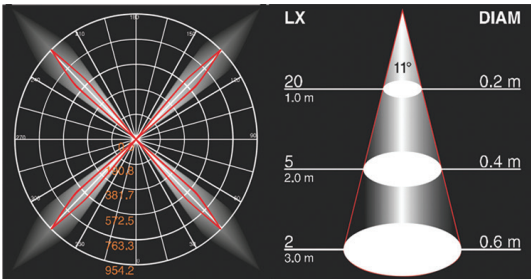

- Pretreated powder coating for outdoor use
- CREE LED chip
- Silicone rubber gasket
- cETL approved

Surface-Mount LED Wall Lights



CL-WL-1141-7W-3K






CL-WL-1142-14W-3K





CL-WL-1143-15W-3K

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-1141-7W-3K	110-220VAC, 50Hz	7 W	377 lm	3000K	98°
CL-WL-1142-14W-3K	110-220VAC, 50Hz	14 W	990 lm	3000K	98°
CL-WL-1143-15W-3K	110-220VAC, 50Hz	15 W	752 lm	3000K	97°



Available in White and Black body color

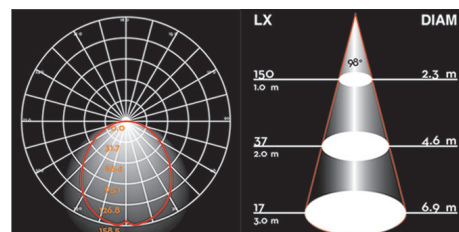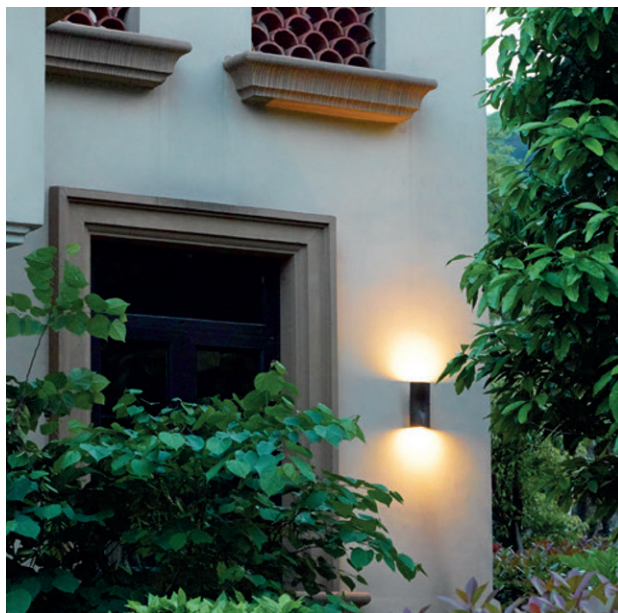

CL-WL-1141

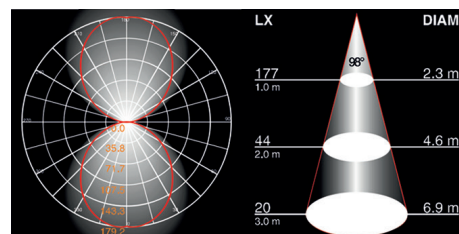


CL-WL-1142

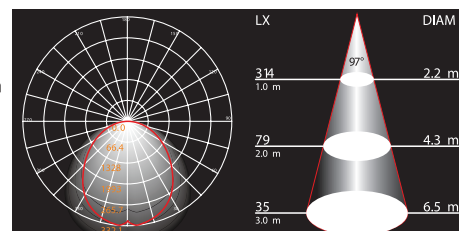

CL-WL-1143




- Pretreated powder coating for outdoor use
- CREE LED chip
- Silicone rubber gasket
- cETL approved
- Designed by Franco Pagliarini



Surface-Mount LED Wall Light





Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-2553-8W-3K	110-220VAC, 50Hz	8 W	160lm	3000K	15°/78°

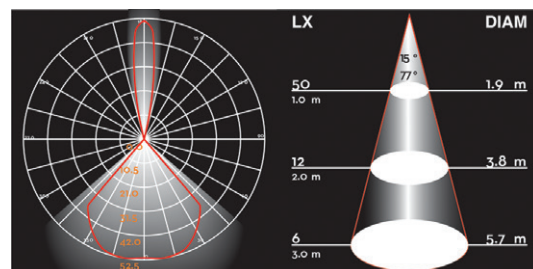


- Pretreated powder coating for outdoor use
- CREE LED chip
- Silicone rubber gasket
- cETL approved

Surface-Mount LED Ceiling Light

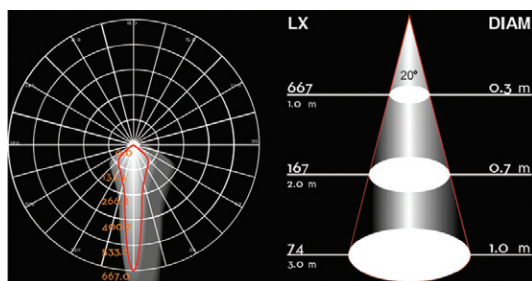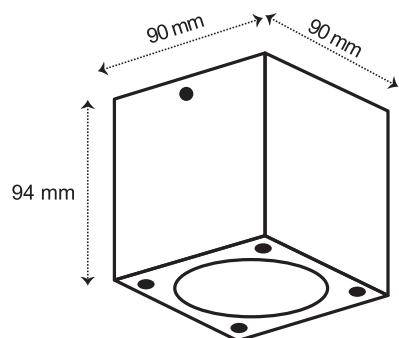

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-SCL-2386-7W-3K	110-240VAC, 50/60Hz	7 W	575 lm	3000K	20°




- Pretreated powder coating for outdoor use
- OSRAM LED chip
- cETL approved

Surface-Mount LED Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-18208-11W-3K-WH	110-240VAC ,50/60Hz	11W	740lm	3000K	120°
CL-WL-18208-11W-3K-BL					

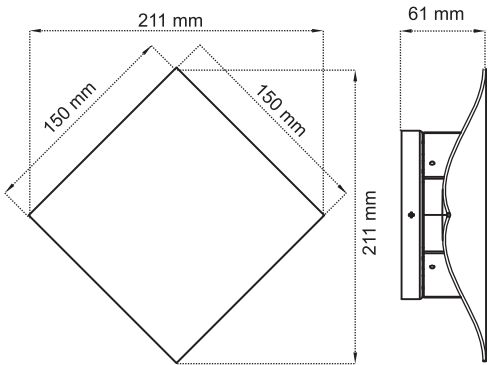


ALUMINUM
DIE CAST



PF
≥0.8


CRI
>80


IP65



5
YEARS
WARRANTY


Lifetime
>50,000 hrs


Working
Temperature
-25°C +50°C

- Pretreated powder coating for outdoor use
- OSRAM LED chip
- cETL approved


Surface-Mount LED Wall Light

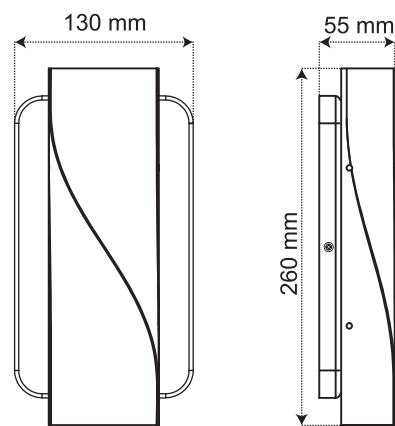


CL-WL-18209-11W-3K



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-18209-11W-3K-WH	110-240VAC , 50/60Hz	11W	710lm	3000K	110°
CL-WL-18209-11W-3K-BL					
CL-WL-16106-13W-3K-BL	110-240VAC , 50/60Hz	13W	960lm	3000K	128°

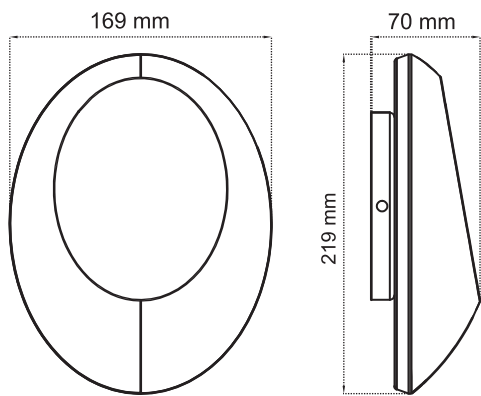

CL-WL-16106-13W-3K

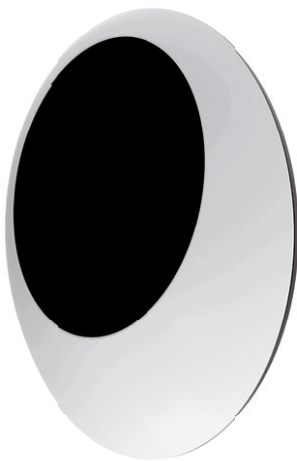

ALUMINUM
DIE CAST

Working
Temperature

- Pretreated powder coating for outdoor use
- OSRAM LED chip
- cETL approved

Surface-Mount LED Wall Light (All in one)



CL-WL-C04-Arc Head-BL



CL-WL-C04-Cloud Head-BL




CL-WL-C04-20W-4CCT-B
with cube head




Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-C04-20W-4CCT-BL	120-347 VAC	Adjustable	90lm/W	4CCT	20°-100°
Cube head included	50/60Hz	8W/12W/16W/20W		2700K-3000K-4000K-5000K	

Note: Supplied with a standard cube head, with optional Arc and Cloud heads available, easily interchangeable via a slide-in design.

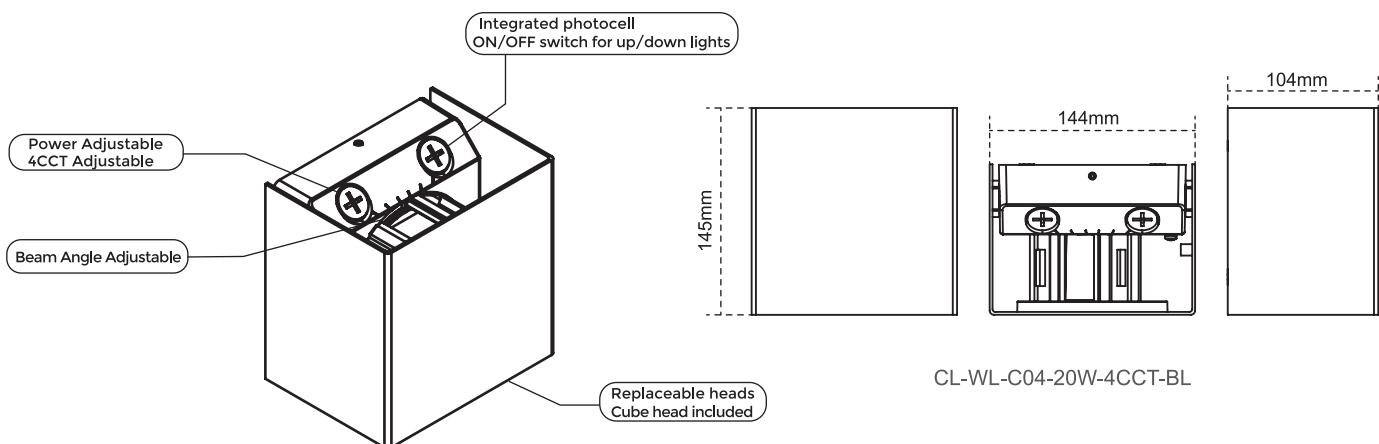


Frames

CL-WL-C04-Arc Head-BL

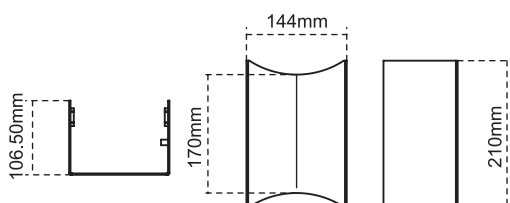

CL-WL-C04-Cloud Head-BL

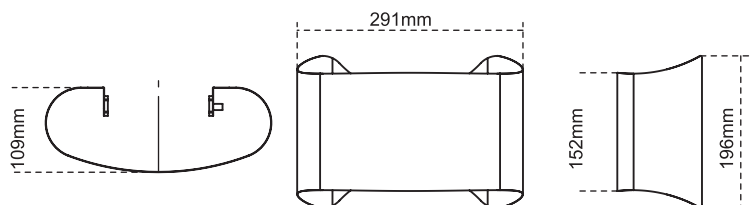


• cETL approved


Linear Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	IP
CL-WL-L318-12W-3CCT-BL	120-277 VAC	12W	700lm	3CCT	54
CL-WL-L324-16W-3CCT-BL	50/60Hz	16W	1100lm	3000K-4000K-5000K	

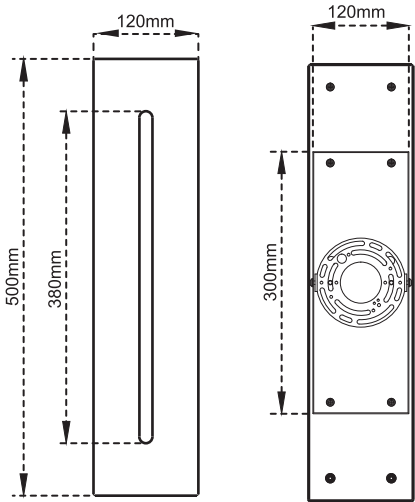

CL-WL-L318-12W-3CCT-BL

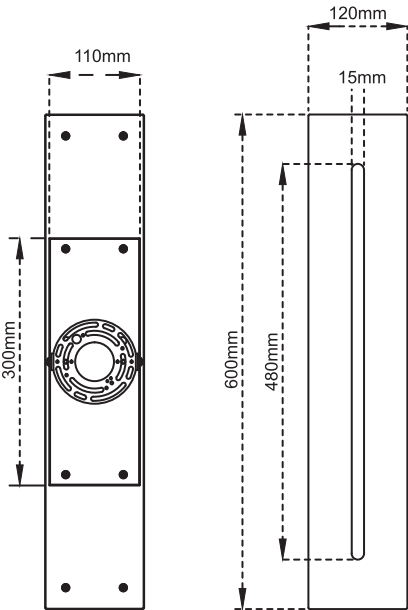

CL-WL-L324-16W-3CCT-BL

TRIAC
DIMMABLE

PF
≥0.9

CRI
>90

IP54

5
YEAR
WARRANTY

Lifetime
>50,000 hrs

-25°C

+50°C


Working
Temperature

- cETL approved
- Available in Black body color


Linear Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	IP
CL-WL-L418-12W-3CCT-BL	120-277 VAC	12W	700lm	3CCT	54
CL-WL-L424-16W-3CCT-BL	50/60Hz	16W	1100lm	3000K-4000K-5000K	

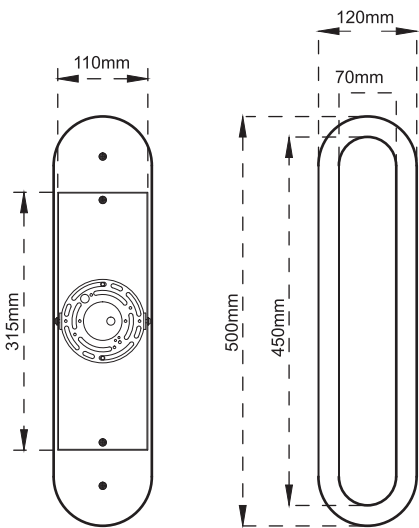

CL-WL-L418-12W-3CCT-BL

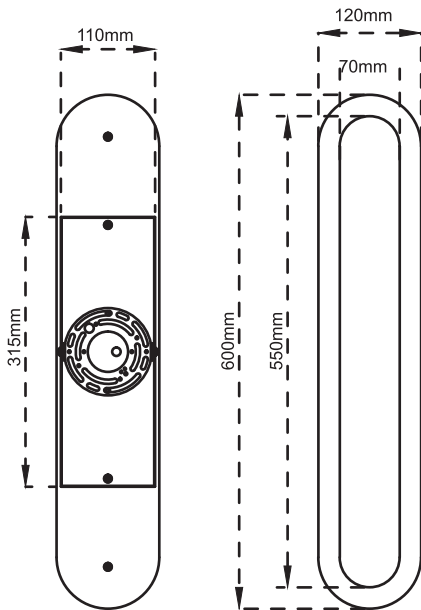

CL-WL-L424-16W-3CCT-BL

TRIAC
DIMMABLE

PF
≥0.9

CRI
>90

IP54

5
YEARS
WARRANTY

Lifetime
>50,000 hrs

-25°C

+50°C


Working
Temperature

- cETL approved
- Available in Black body color


Linear Wall Light



Product Code	Input Voltage	Power	Lumen	Color Temp	IP
CL-WL-L524-18W-3CCT-BL	120-277 VAC	18W	1200lm	3CCT	54
CL-WL-L548-30W-3CCT-BL	50/60Hz	30W	2000lm	3000K-4000K-5000K	

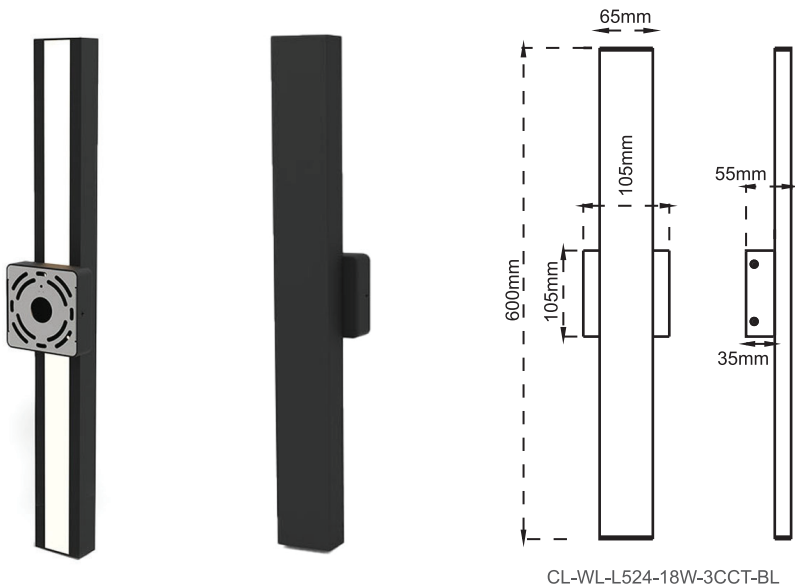

CL-WL-L524-18W-3CCT-BL

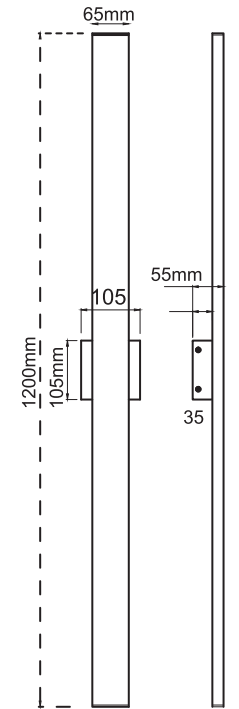

CL-WL-L548-30W-3CCT-BL

TRIAC
DIMMABLE

PF
≥0.9

CRI
>90

IP65

5
YEARS
WARRANTY

Lifetime
>50,000 hrs

Working
Temperature
-25°C
+50°C


- cETL approved
- Available in Black body color



LED Exterior Lights




CL-WL-16404-13W-3K-BL

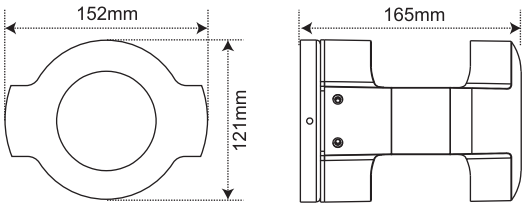


Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-16404-13W-3K-BL	110-240VAC	13W	500lm	3000K	330°
CL-GL-16402-12W-3K-BL	12-24VAC/DC	12W	900lm	3000K	247°



CL-GL-16402-12W-3K-BL

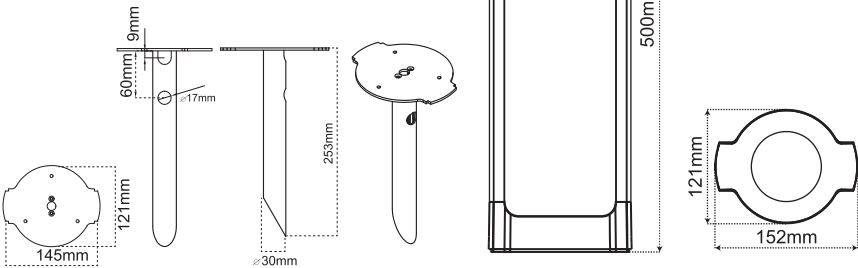

Spike




- Pretreated powder-coated for outdoor use
- OSRAM LED chip
- cETL approved

LED Exterior Lights





cano light
Canadian Brightness




Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-16604-13W-3K	110-240VAC, 50/60Hz	13W	515lm	3000K	335°
CL-GL-16603-12W-3K	12-24VAC/DC	12W	988lm	3000K	236°



CL-GL-16603-12W-3K

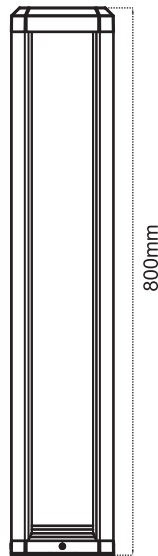

CL-WL-16604-13W-3K




- Pretreated powder coating for outdoor use
- OSRAM LED chip
- cETL approved



LED Exterior Lights





CL-WL-14408-7W-3K-BL

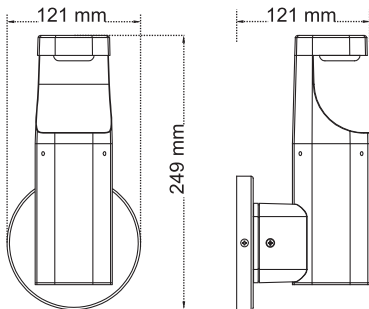

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-WL-14408-7W-3K-BL	110-240VAC, 50/60Hz	7W	290lm	3000K	114°
CL-GL-14406-7W-3K-BL	12-24VAC/DC	7W	338lm	3000K	189°



CL-GL-14406-7W-3K-BL

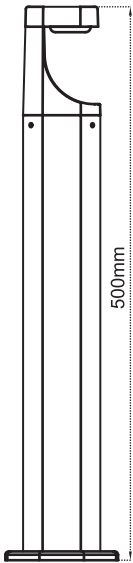

- Pretreated powder coating for outdoor use
- OSRAM LED chip
- cETL approved

LED Garden Lights



CL-GL045-524-3CCT-BL




Head A

Head B


Head C

CL-GL065-524-3CCT-BL

Product Code	Input Voltage	Power	Lumen	Color Temp	IP
CL-GL065-524-3CCT-BL	12-24VAC/DC	5 W	200lm	3CCT Adjustable	65
CL-GL045-524-3CCT-BL	12-24VAC/DC	5 W	220lm	3000K,4000K,5000K	65

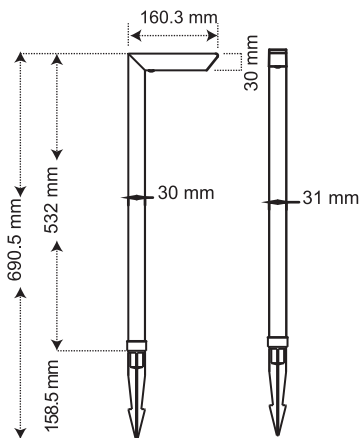


CL-GL045-524-3CCT-BL

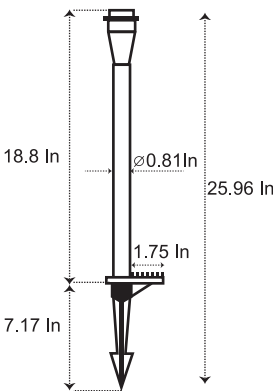


CL-GL065-524-3CCT-BL




CL-GL065-HEAD A-BL



CL-GL065-HEAD B-BL



CL-GL065-HEAD C-BL




• Epoxy powder paint finish


Landscape Spot Lights




Product Code	Input Voltage	Power	Lumen	Beam Angle	Color Temp	IP
CL-LS13-30-724-5CCT-BL	12-24VAC	7W	650lm	30°	5CCT 2700K-3000K-3500K 4000K-5000K	65
CL-LS13-30-524-RGBCW-M-BL	12-24VAC	5W		30°	RGBCW Manual button	65
CL-LS13-30-724-RGBCW	12-24VAC	7 W		30°	RGBCW	65

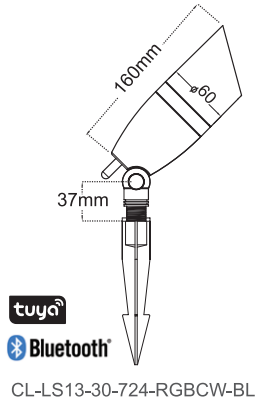

CL-LS13-30-724-RGBCW-BL

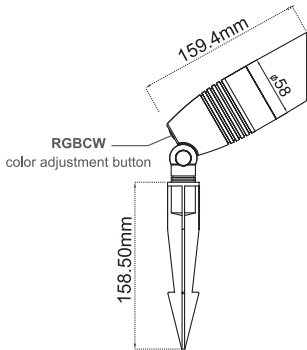

CL-LS13-30-524-RGBCW-M-BL



CL-LS13-30-724-5CCT-BL

Mounting Installation Accessories

CL-LSA-M03		CL-LSA-M04		CL-LSA-M05	
------------	--	------------	--	------------	--

- 180° Adjustable light head
- Tempered glass lens

LED In-ground Lights



CL-IG066-624-3K-BL





CL-IG024-124-SS



CL-IG048-324-SS

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle	IP
CL-IG066-624-3K-BL	12-24VAC	6 W	220 lm	3000K	120°	66
CL-IG024-124-3K-SS	12-24VAC	1W	80lm	3000K	30°	67
CL-IG024-124-5K-SS	12-24VAC	1W	80lm	5000K	30°	67
CL-IG048-324-3K-SS	12-24VDC/9-17VAC	3W	250lm	3000K	30°	67
CL-IG048-324-5K-SS	12-24VDC/9-17VAC	3W	250lm	5000K	30°	67

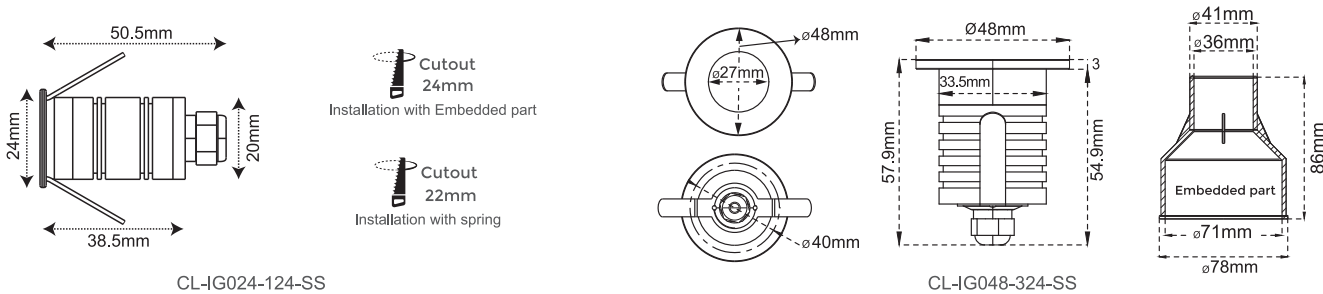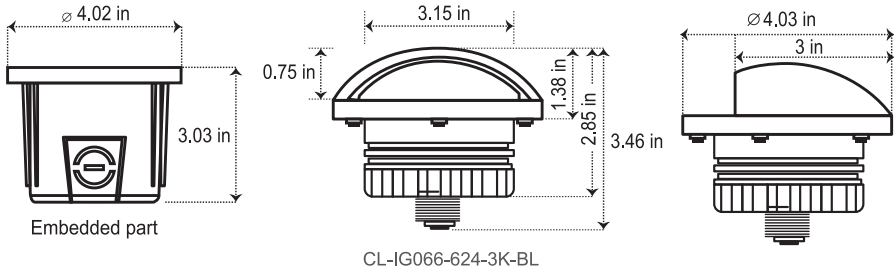

- CL-IG066-624: Die-cast aluminum
- CL-IG024-124: Stainless steel body
- CL-IG048-324: Stainless steel 304 body with ABS embedded enclosure
- Pretreated powder coating for outdoor use

LED Deck Lights



CL-DL025-524




CL-DL013-324




CL-DL062-324


Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-DL025-524-3K-BL	12-24VAC	5 W	300 lm	3000K	120°
CL-DL025-524-5K-BL	12-24VAC	5 W	300 lm	5000K	120°
CL-DL013-324-3K-BL	12-24VAC	3.5 W	110 lm	3000K	55°
CL-DL062-324-3CCT-BL	12-24VAC	3 W	120 lm	3CCT (3000K-4000K-5000K)	55°

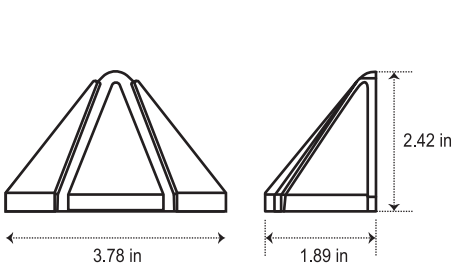

CL-DL025-524



CL-DL013-324



CL-DL062-324



ALUMINUM
DIE CAST

CRI
> 90

IP65

5
YEAR
WARRANTY

Lifetime
> 50,000 hrs


Working
Temperature

- Epoxy powder paint finish


LED Hardscape Lights




7 inch Smart LED Hardscape Light
CL-HS055-524-RGBCW-ORB

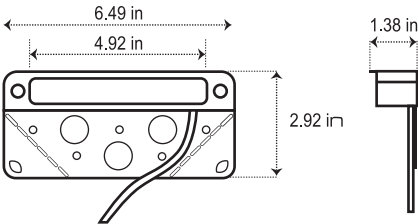


7 inch Replaceable Light Head LED Hardscape
CL-HS045R-324-RGBCW-ORB

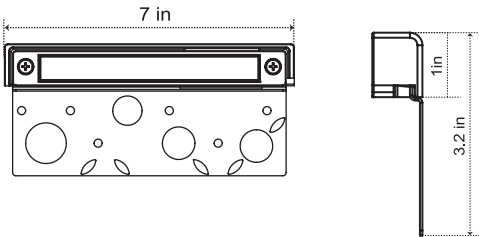

7 inch LED Hardscape Light
CL-HS045-524-3CCT-ORB

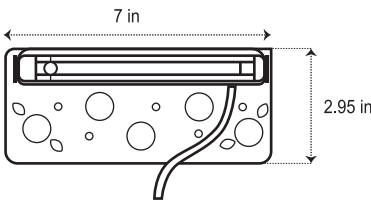


12 inch LED Hardscape Light
CL-HS047-724-3CCT-ORB

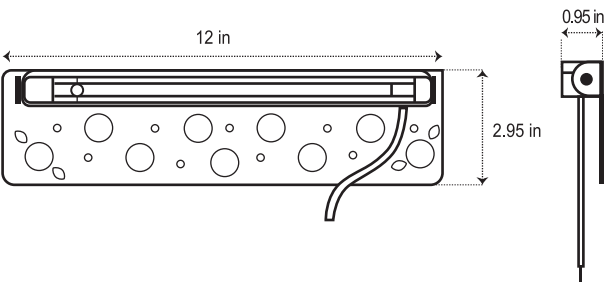

Product Code	Input Voltage	Power	Lumen	Color Temp	Length
CL-HS055-524-RGBCW-ORB	12-24VAC	5 W		RGBCW Applicable with Tuya app	7 inch
CL-HS045R-324-RGBCW-ORB	7-17VAC & 12-24VDC	3W		RGBCW Manual Button	7 inch
CL-HS045-524-3CCT-ORB	12-24VAC	5 W	200 lm	3CCT Adjustable 3000K 4000K 5000K	7 inch
CL-HS047-724-3CCT-ORB	12-24VAC	7 W	280 lm		12 inch

- Epoxy powder paint finishing
- Stainless steel bracket







LED Strip Lights

canolight
Canadian Brightness

Side Bend Neon Strip Lights

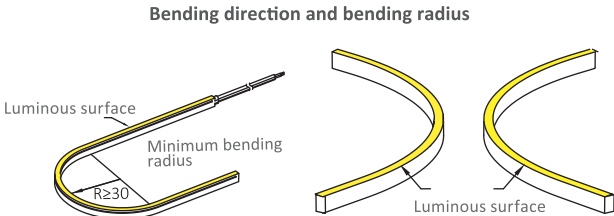


Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON0307A-LR-4-3K	24VDC	4W/m	107lm/W	3000K	5m/Roll
CL-ST-NEON0307A-LR-4-4K				4000K	5m/Roll
CL-ST10-NEON0307A-LR-4-3K	24VDC	4W/m	107lm/W	3000K	10m/Roll
CL-ST10-NEON0307A-LR-4-4K				4000K	10m/Roll

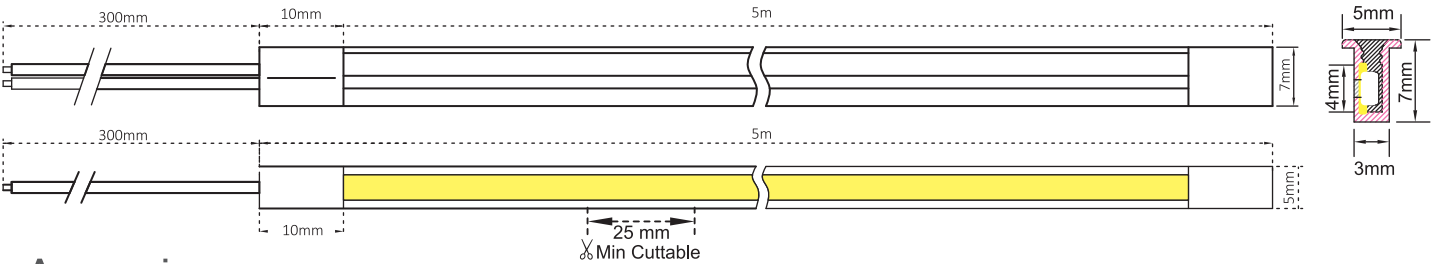


Accessories

CL-ACC-NEON0307-ECH
End cap with hole
4pcs/5M
8pcs/10M



CL-ACC-NEON0307-EC
End cap without hole
4pcs/5M
8pcs/10M



32ft
10m
/roll

16ft
5m
/roll


CRI
>80

IP65

3
YEARS
WARRANTY

Lifetime
>50,000 hrs

-25°C +50°C
Working
Temperature




Mounting Channel and Clips are available

• cUL approved


Side Bend Neon Strip Lights



Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON0407-LR-7.2-3K	24VDC	7.2W/m	60lm/W	3000K	5m/Roll
CL-ST-NEON0407-LR-7.2-4K				4000K	5m/Roll
CL-ST10-NEON0407-LR-7.2-3K	24VDC	7.2W/m	60lm/W	3000K	10m/Roll
CL-ST10-NEON0407-LR-7.2-4K				4000K	10m/Roll

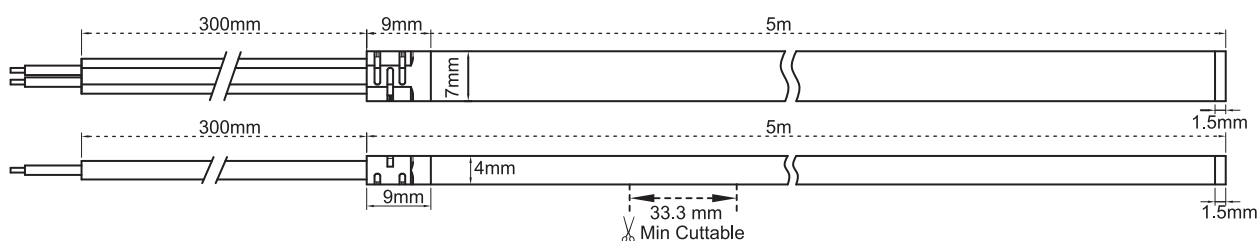

Bending direction and bending radius

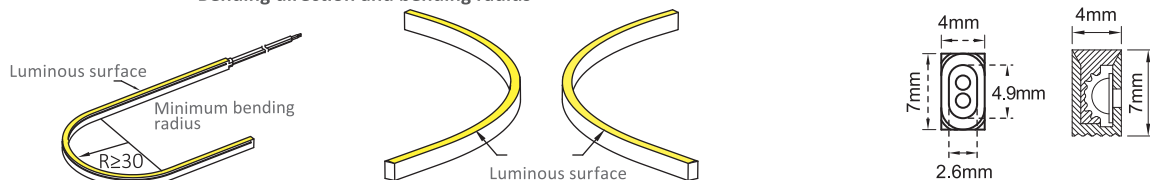


Accessories

CL-ACC-NEON0407-ECH

End cap with hole


4pcs/5M
8pcs/10M



CL-ACC-NEON0407-EC

End cap without hole

4pcs/5M
8pcs/10M



32ft
10m
/roll

16ft
5m
/roll



CRI
>80

IP67

3
YEARS
WARRANTY

Lifetime
>50,000 hrs


-25°C
+50°C
Working
Temperature




Mounting Channel and Clips are available

• cUL approved

Top Bend Neon Strip Lights

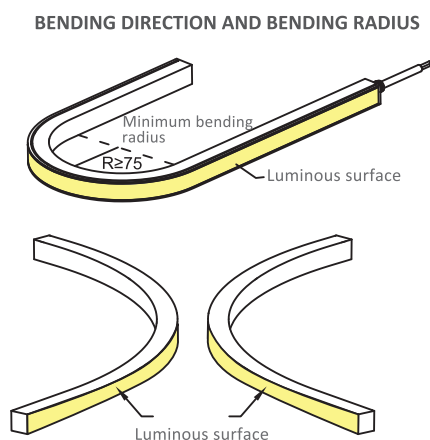

Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON0606-UD-7.2-3K	24VDC	7.2W/m	90lm/W	3000K	5m/Roll
CL-ST-NEON0606-UD-7.2-4K				4000K	5m/Roll
CL-ST10-NEON0606-UD-7.2-3K	24VDC	7.2W/m	90lm/W	3000K	10m/Roll
CL-ST10-NEON0606-UD-7.2-4K				4000K	10m/Roll

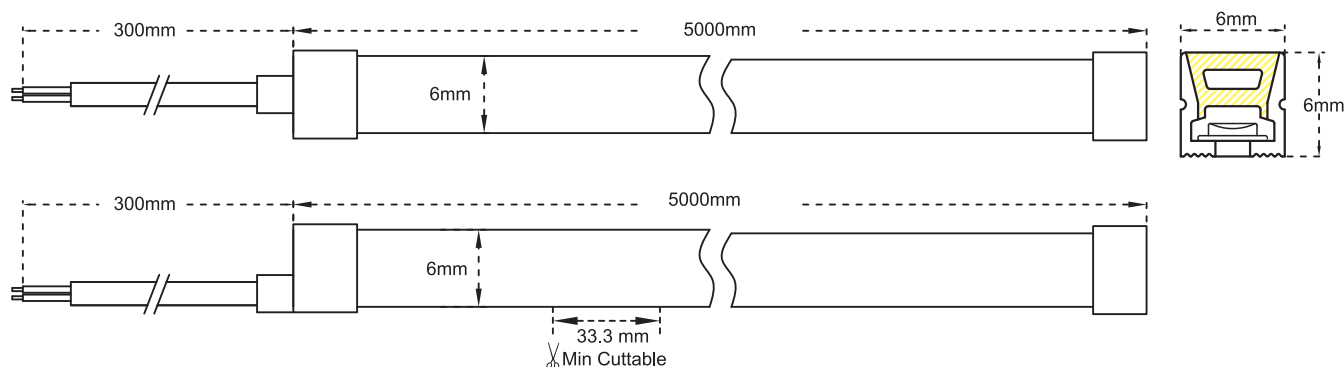


Accessories

CL-ACC-NEON0606-ECH

End cap with hole




4pcs/5M
8pcs/10M



CL-ACC-NEON0606-EC

End cap without hole

4pcs/5M
8pcs/10M




Mounting Channel and Clips are available


• cUL approved



Top Bend Neon Strip Lights

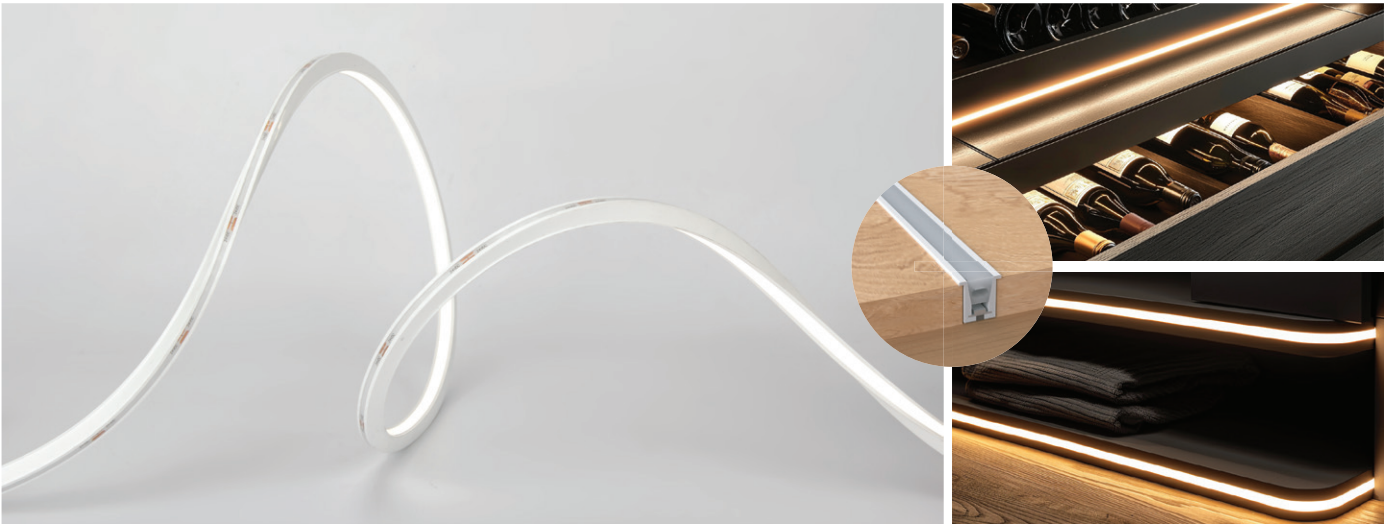


Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON0608A-UD-4-3K	24VDC	4W/m	100lm/W	3000K	5m/Roll
CL-ST-NEON0608A-UD-4-4K				4000K	5m/Roll
CL-ST10-NEON0608A-UD-4-3K	24VDC	4W/m	100lm/W	3000K	10m/Roll
CL-ST10-NEON0608A-UD-4-4K				4000K	10m/Roll

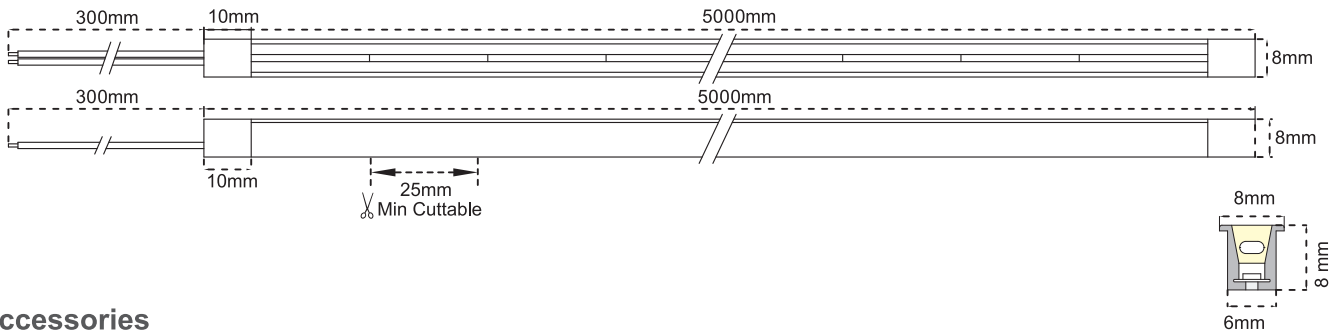

Accessories



CL-ACC-NEON0608-ECH
End cap with hole

4pcs/5M
8pcs/10M



CL-ACC-NEON0608-EC
End cap without hole

4pcs/5M
8pcs/10M



Mounting Channel and Clips are available




• cUL approved

3D Bendable Neon Strip Lights




Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON1208-3D-14.4-3K	24VDC	14.4W/m	76lm/W	3000K	5m/Roll
CL-ST-NEON1208-3D-14.4-4K				4000K	5m/Roll
CL-ST10-NEON1208-3D-14.4-3K	24VDC	14.4W/m	76lm/W	3000K	10m/Roll
CL-ST10-NEON1208-3D-14.4-4K				4000K	10m/Roll

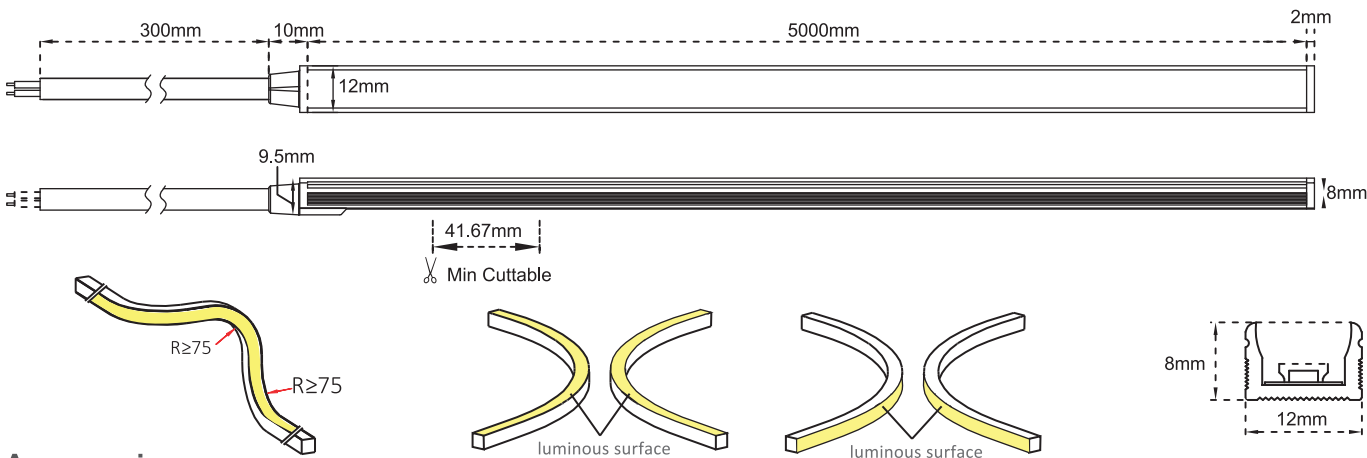


Accessories

CL-ACC-NEON1208-ECH
End cap with hole
4pcs/5M
8pcs/10M



CL-ACC-NEON1208-EC
End cap without hole
4pcs/5M
8pcs/10M



32ft
10m
/roll

16ft
5m
/roll

CRI
>80

IP67

3
YEARS
WARRANTY


Lifetime
>50,000 hrs

-25°C
+50°C
Working
Temperature


Mounting Channel and Clips are available

• cUL approved

3D Bendable Neon Strip Lights

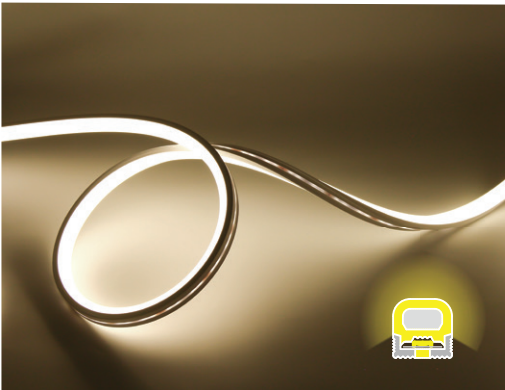

Product Code	IN Voltage	Power	Lumen	Color Temp	Reel
CL-ST-NEON1212-3D-14.4-3K	24VDC	14.4W/m	83lm/W	3000K	5m/Roll
CL-ST-NEON1212-3D-14.4-4K				4000K	5m/Roll
CL-ST10-NEON1212-3D-14.4-3K	24VDC	14.4W/m	83lm/W	3000K	10m/Roll
CL-ST10-NEON1212-3D-14.4-4K				4000K	10m/Roll

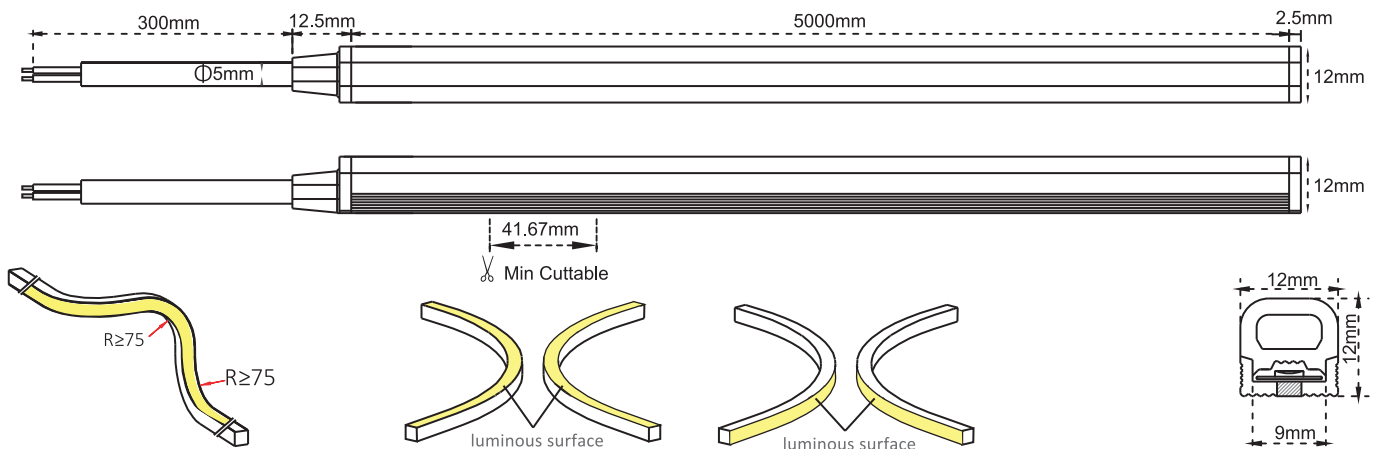


Accessories

CL-ACC-NEON1212-ECH

End cap with hole





4pcs/5M
8pcs/10M



CL-ACC-NEON1212-EC

End cap without hole

4pcs/5M
8pcs/10M




Mounting Channel and Clips are available
• cUL approved

3D Bendable Neon Strip Lights



Product Code	IN Voltage	Power	Lumen	Color Temp	PCB Width	Reel
CL-ST-NEON1515-3D-14.4-3K	24VDC	14.4W/m	60lm/W	3000K	8mm	5m/Roll
CL-ST-NEON1515-3D-14.4-4K				4000K		5m/Roll
CL-ST10-NEON1515-3D-14.4-3K	24VDC	14.4W/m	60lm/W	3000K	8mm	10m/Roll
CL-ST10-NEON1515-3D-14.4-4K				4000K		10m/Roll

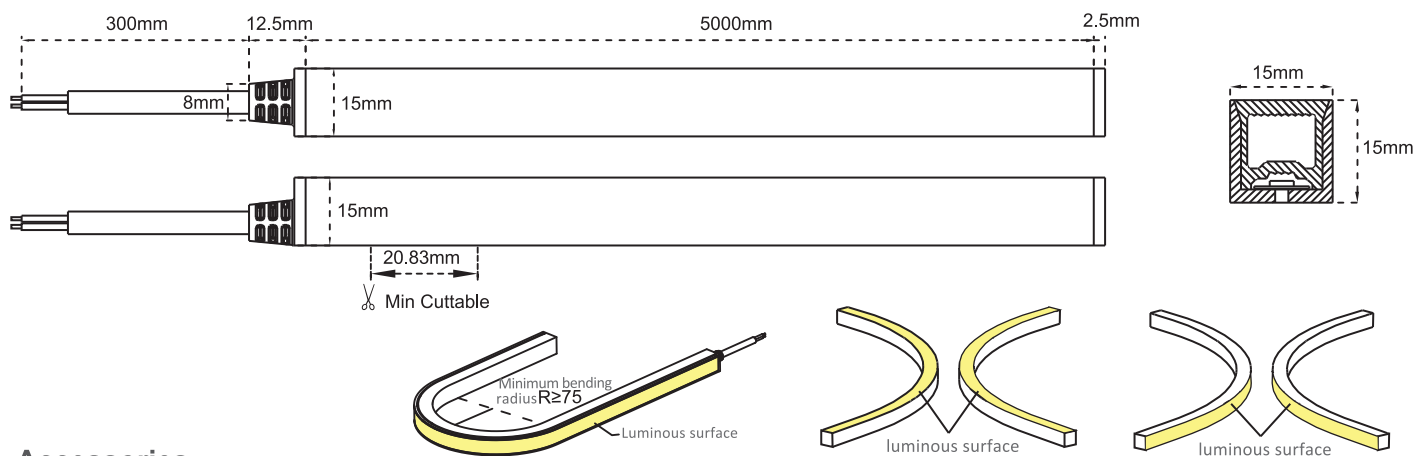


Accessories

CL-ACC-NEON1515-ECH

End cap with hole



4pcs/5M
8pcs/10M



CL-ACC-NEON1515EC

End cap without hole


4pcs/5M
8pcs/10M




Mounting Channel and Clips are available
• cUL approved



3D Bendable RGB Neon Strip Lights

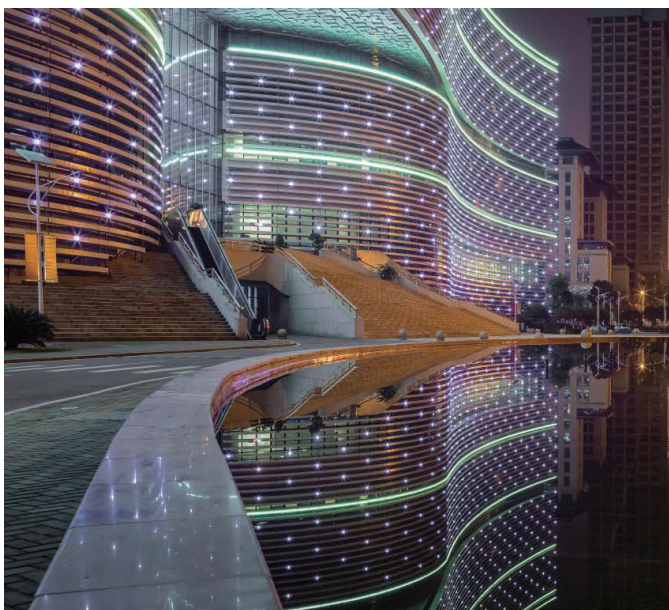


Product Code	IN Voltage	Power	Color Temp	Reel
CL-ST-NEON1515-3D-14.4-RGB	24VDC	14.4W/m	RGB	5m/Roll
CL-ST10-NEON1515-3D-14.4-RGB	24VDC	14.4W/m	RGB	10m/Roll

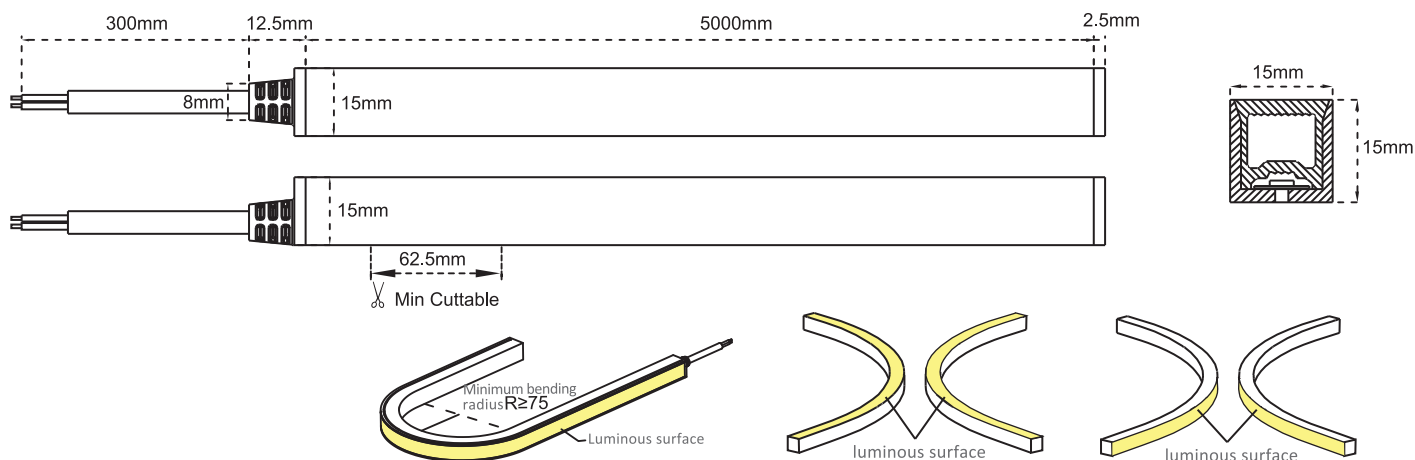

Accessories



CL-ACC-NEON1515-ECH End cap with hole

4pcs/5M
8pcs/10M



CL-ACC-NEON1515EC End cap without hole

4pcs/5M
8pcs/10M





Mounting Channel and Clips are available
• cUL approved

Low Voltage 360° Neon Strip Lights



Product Code	Input Voltage	Power	Lumen	Color Temp	Diameter	Reel
CL-STNEON25-360D-2465-3K	24VDC	14.4W/m	930lm/m	3000K	Φ25mm	5m/Roll
CL-STNEON25-360D-2465-4K				4000K		

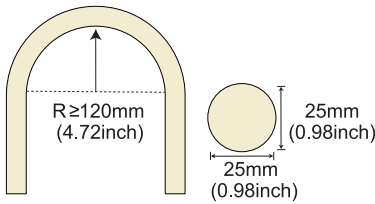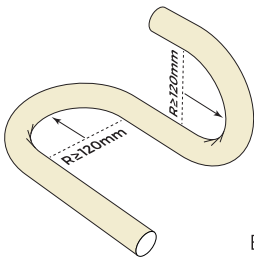

Bending Direction & Min. radius



• cUL approved


Neon 360° Strip Lights Installation Accessories



CL-ST-NEON25-360D-Clips kit A


Material: PC, Transparent

Size: L25 x W51.6 x H27.8 mm



CL-ST-NEON25-360D-Clips kit B


Concealed buckle/Steel needle/Clip



CL-ST-NEON25-360D-Embedded kit trimless

Size: $\Phi 64$ x H20mm


Mounting hole size: $\Phi 40$ mm

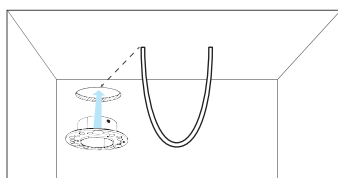

CL-ST-NEON25-360D-Horizontal pendant kit

Transparent



Size: $\Phi 30$ x H80mm



CL-ST-NEON25-360D-Embedded kit with trim

Size: $\Phi 64$ xH20 mm


Mounting hole size: $\Phi 40$ mm

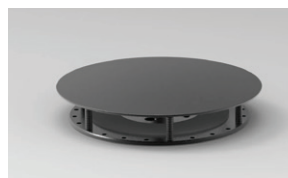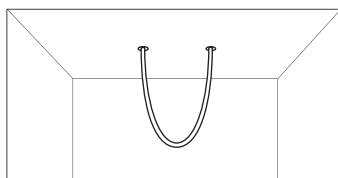

CL-ST-NEON25-360D-Wall mount clip C-BL

Wall mount clip C


Size: Outer $\Phi 110$ x inner $\Phi 90$ x H30mm

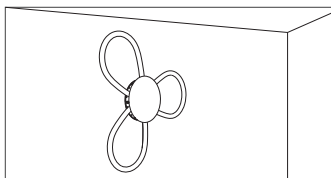

CL-ST-NEON25-360D-Wall mount clip A


Cylindrical wall mount clip

Size: $\Phi 33$ mm x H44mm

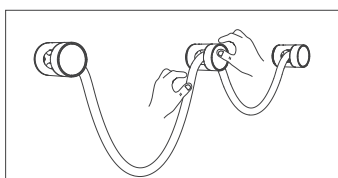

CL-ST-NEON25-360D-Mounting kit


Connecting ring/Connector/screws/wirerope



CL-ST-NEON25-360D-Wall mount clip B

Cylindrical wall mount clip


Size: $\Phi 33$ mm x H76mm

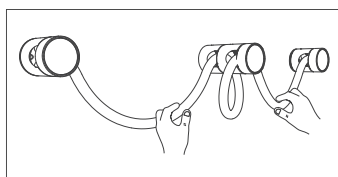


CL-ST-NEON25-360D-Horizontal lifting kit

PC tube length: 38mm

Length of wire rope: 2m

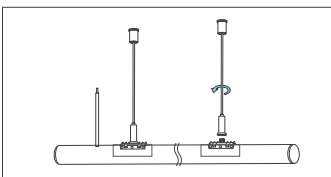


Neon 360° Strip Lights Installation Accessories

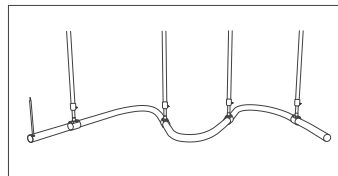

CL-ST-NEON25-360D-Vertical lifting kit A

Round tube Size: L38x ϕ 29.4mm


Telescopic pole length: 0.3-0.6m

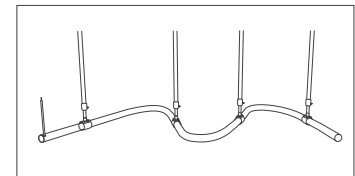

CL-ST-NEON25-360D-Vertical lifting kit B

Round tube Size: L38x ϕ 29.4mm

Telescopic pole length: 0.3-0.6m

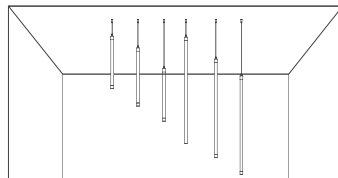


CL-ST-NEON25-360D-single end vertical surface mount kit B

Lifting plug\ round tube\ Metal plug\ 2m wire rope

Round tube size: L1000 x ϕ 29.4mm



Wire rope length: ϕ 3 x 2000mm, 20AWG

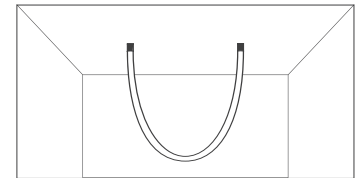

CL-ST-NEON25-360D-Double end vertical pendant kit


Double end vertical ceiling installation accessory

Included: pendant end cap/screws/plug

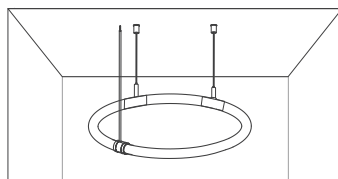

CL-ST-NEON25-360D-Horizontal pendant kit

CL-ST-NEON25-360D-Mounting kit

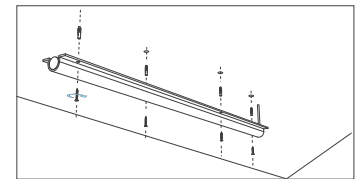


CL-ST-NEON25-360D-Horizontal surface mount kit

Horizontal ceiling installation accessory package


PC tube length: 1m



Low Voltage Tunable COB Strip Lights

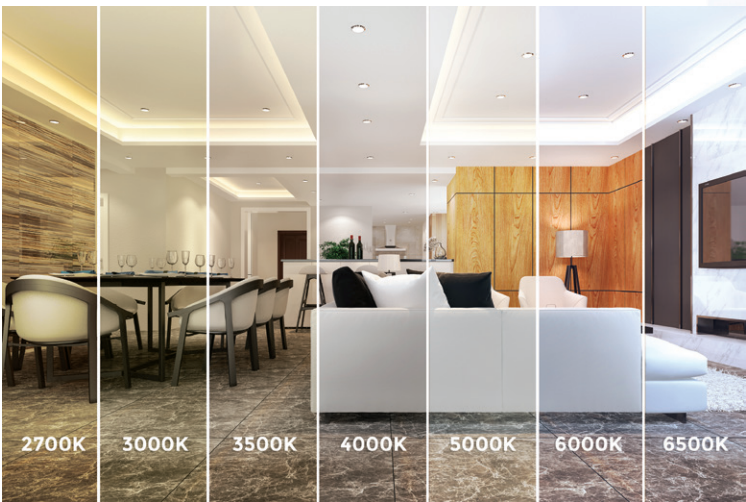

Product Code	IN Voltage	Power	Lumen	Color Temp	LED QTY	PCB Width	Reel
CL-ST-COB-608-14-2420-TW	24VDC	14W/m	90lm/W	Tunable	608LED/M	10mm	5m/Roll
CL-ST10-COB-608-14-2420-TW				2700K to 6500K			10m/Roll

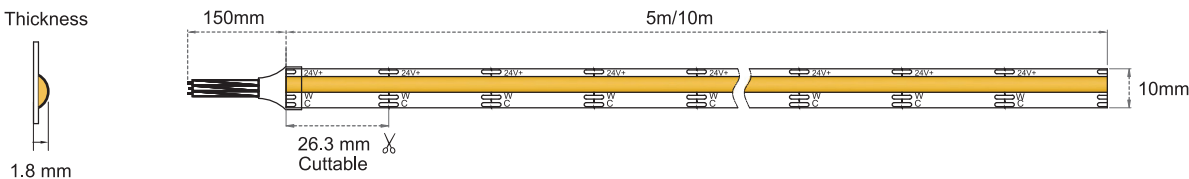

- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- cUL approved
- A tunable white controller is required for operation.
Compatible with Canolight RGBCW controllers and remotes:
 - CL-AST-SWCWL5-LV
 - CX-W01-P5-12A-RGBCW controller
 - CL-AST-RFCLS2-LV
 - CL-AST-RFRFUT092-LV





Low-Voltage COB LED Strip Lights





Input Voltage	Power	Lumen	LED Qty	CRI	Reel	PCB Width
24VDC	9W/m	750lm/m	480LED/m	>90	16 ft (5m)	8 mm

	Product Code	Color Temp
IP20	CL-ST-COB-480-9-2420-2.7K	2700K
	CL-ST-COB-480-9-2420-3K	3000K
	CL-ST-COB-480-9-2420-3.5K	3500K
	CL-ST-COB-480-9-2420-4K	4000K
	CL-ST-COB-480-9-2420-5K	5000K
IP65	CL-ST-COB-480-9-2465-3K	3000K
	CL-ST-COB-480-9-2465-4K	4000K
	CL-ST-COB-480-9-2465-5K	5000K

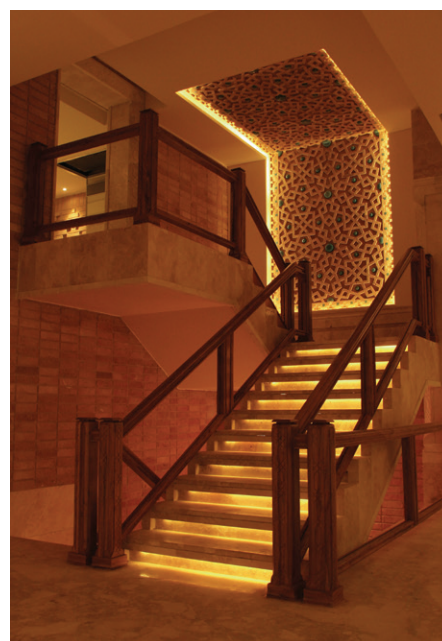

Thickness

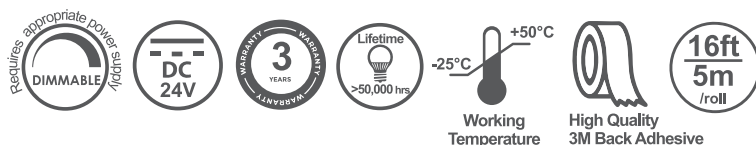

- o Installation accessories are available.
- o Maximum 10 meters of strips can be connected in series mode to one power supply.




- 24V strip, superior performance compared to 12V strip
- cETL or cUL approved
- Uniform and dotless light effect

Low-Voltage Long-Run COB LED Strip Lights



Input Voltage	Power	Lumen	LED Qty	CRI	Reel	PCB Width
24VDC	8W/m	640lm/m	384 LED/m	>90	32 ft (10m)	8 mm

	Product Code	Color Temp
IP20	CL-ST10-COB-384-8-2420-2.7K	2700K
	CL-ST10-COB-384-8-2420-3K	3000K
	CL-ST10-COB-384-8-2420-3.5K	3500K
	CL-ST10-COB-384-8-2420-4K	4000K
	CL-ST10-COB-384-8-2420-5K	5000K
IP67	CL-ST10-COB-384-8-2467-3K	3000K
	CL-ST10-COB-384-8-2467-4K	4000K
	CL-ST10-COB-384-8-2467-5K	5000K

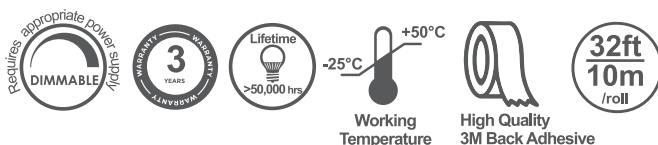
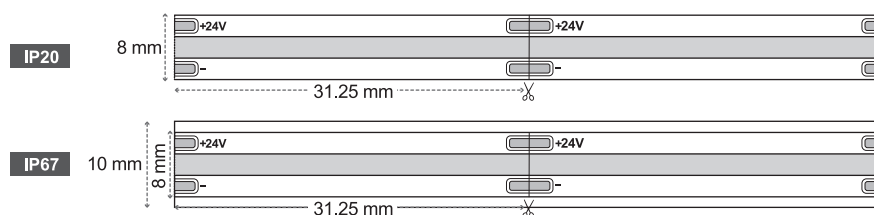


- o Installation accessories are available.
- o Maximum 10 meters of strips can be connected in series mode to one power supply.
- 24V strip, superior performance compared to 12V strip
- cETL or cUL approved
- Uniform and dotless light effect

Low-Voltage COB LED Strip Lights RGB, RGBW



Product Code	IN Voltage	Power	CCT	Lumen	IP	Reel	PCB Width
CL-ST-COB-630-9-2420-RGB	24VDC	9 W/m	RGB	630 LED/m	20	16 ft (5 m)	10 mm
CL-ST10-COB-630-9-2420-RGB	24VDC	9 W/m	RGB	630 LED/m	20	32 ft (10m)	10 mm
CL-ST-COB-630-9-2467-RGB	24VDC	9 W/m	RGB	630 LED/m	67	16 ft (5 m)	10 mm
CL-ST-COB-896-16-2420-RGBW	24VDC	16 W/m	RGBW White color is 3K	896 LED/m	20	16 ft (5m)	12 mm
CL-ST10-COB-896-16-2420-RGBW	24VDC	16 W/m	RGBW White color is 3K	896 LED/m	20	32 ft (10m)	12 mm

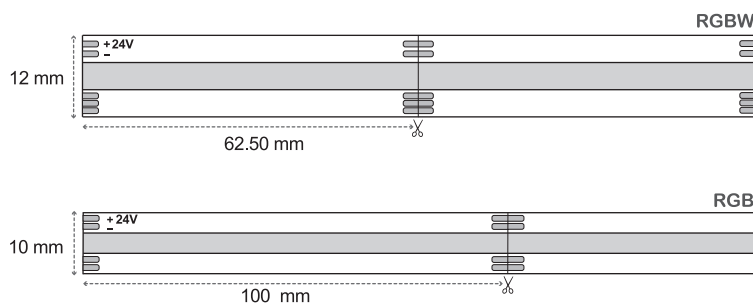

- o Installation accessories are available.
- o Maximum 10 meters of strips can be connected in series mode to one power supply.
- 24V strip, superior performance compared to 12V strip
- cETL or cUL approved
- Uniform and dotless light effect

Low-Voltage SOB LED Strip Light

High Performance Dottles Strip Lights




Input Voltage	Power	Lumen	LED QTY	IP	PCB Width
24VDC	9.6W/m	1300lm/m	288LED/m	40	8 mm

Product Code	Color Temp	Product Code	Color Temp
CL-SOB-288-9.6-2440-2.7K	2700K	CL-ST10-SOB-288-9.6-2440-2.7K	2700K
CL-SOB-288-9.6-2440-3K	3000K	CL-ST10-SOB-288-9.6-2440-3K	3000K
CL-SOB-288-9.6-2440-3.5K	3500K	CL-ST10-SOB-288-9.6-2440-3.5K	3500K
CL-SOB-288-9.6-2440-4K	4000K	CL-ST10-SOB-288-9.6-2440-4K	4000K
CL-SOB-288-9.6-2440-5K	5000K	CL-ST10-SOB-288-9.6-2440-5K	5000K

16ft


32ft

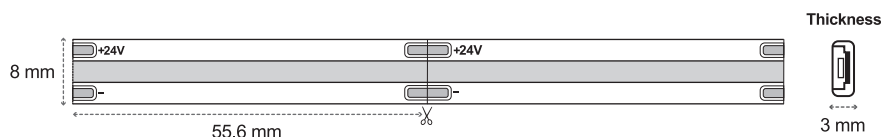


- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- Up to 2 times more brighter than COB strip lights
- Better lumen maintenance and longer lifetime.
- 24V strip, superior performance compared to 12V strip
- cUL approved
- Uniform and dotless light effect



Low-Voltage CSP LED Strip Lights



Product Code	Input Voltage	Power	LED QTY	Lumen	Color Temp	IP	PCB Width
CL-ST-CSP-320-10-2468-3K	24VDC	10 W/m	320 LED/m	950 lm/m	3000K	68	8 mm
CL-ST-CSP-320-10-2468-4K					4000K		
CL-ST-CSP-320-10-2468-5K					5000K		

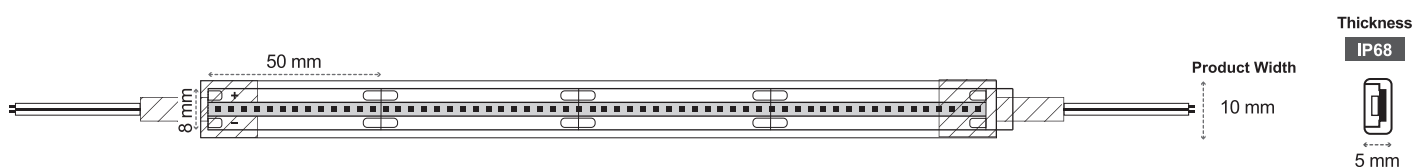


- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- Suitable for sauna and underwater
- 24V strip, superior performance compared to 12V strip
- cUL approved



Low-Voltage COB Mini LED Strip Lights



Product Code	Input Voltage	Power	LED QTY	Lumen	Color Temp	IP
CL-STMINI-COB-504-6-2420-3K	24 VDC	6 W/m	504 LED/m	480lm/m	3000K	20
CL-STMINI-COB-504-6-2420-4K					4000K	
CL-STMINI-COB-504-6-2420-5K					5000K	

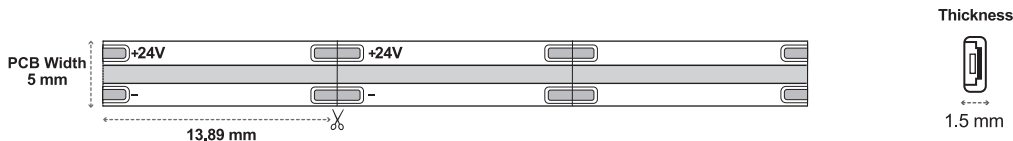


- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- 24V strip, superior performance compared to 12V strip
- cETL or cUL approved
- Uniform and dotless light effect



Low Voltage COB Chaseable Strip Lights



Product Code	Input Voltage	Power	Lumen	Color Temp	LED QTY	PCB Width
CL-STCHASE-COB-420-13-2420-3K	24 VDC	13W/m	1040lm/m	3000K	420LED/m	12 mm
CL-STCHASE-COB-420-13-2420-4K				4000K		

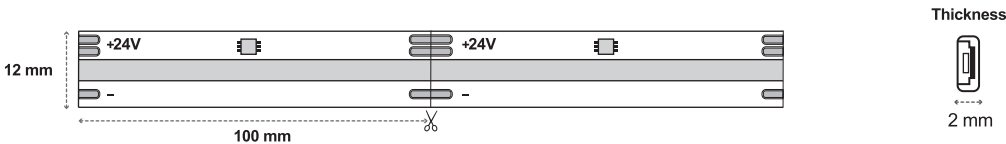

- o Installation accessories are available.
- o Maximum 10 meters of strips can be connected in series mode to one power supply.
- Uniform and dotless light effect
- 24V strip, superior performance compared to 12V strip
- cETL or cUL approved

subject to appropriate power supply

 DIMMABLE

DC 24V

CRI >90

IP20

5 YEARS WARRANTY

Lifetime >50,000 hrs

-25°C to +50°C
Working Temperature


16ft 5m /roll

High Quality 3M Back Adhesive

Low Voltage High-Lumen SMD Strip Lights



Product Code	Input Voltage	Power	Lumen	Color Temp	LED QTY	PCB Width
CL-STHL-SMD-240-21.6-2420-3K	24VDC	21.6W/m	2,592lm/m	3000K	240LED/m	12 mm
CL-STHL-SMD-240-21.6-2420-4K	24VDC	21.6W/m	2,592lm/m	4000K	240LED/m	12 mm

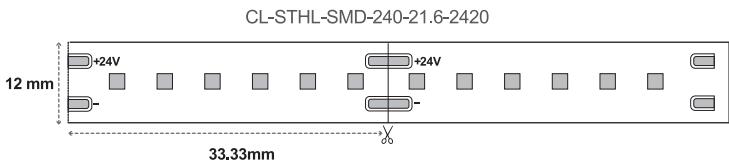


- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- 24V strip, superior performance compared to 12V strip
- cUL approved



Low Voltage High-Lumen SMD Strip Lights





Product Code	Input Voltage	Power	Lumen	CCT	LED QTY	IP	PCB Width
CL-STHL-SMD-240-14.4-2420-3K	24 VDC	14.4W/m	1,770lm/m	3000K	240 LED/m	20	8 mm
CL-STHL-SMD-240-14.4-2420-4K	24 VDC	14.4W/m	1,900lm/m	4000K	240 LED/m	20	8 mm
CL-STHL-SMD-240-14.4-2420-5K	24 VDC	14.4W/m	1,950lm/m	5000K	240 LED/m	20	8 mm

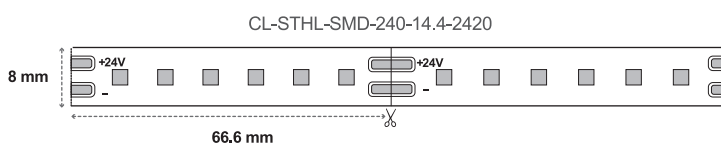

Thickness




- Installation accessories are available.
- Maximum 10 meters of strips can be connected in series mode to one power supply.
- 24V strip, superior performance compared to 12V strip
- cUL approved



High-Voltage SMD LED Strip Lights




Product Code	Input Voltage	Power	Lumen	CCT	LED QTY	IP
CL-ST-SMD-2835-60-6-11065-3K	110-120 VAC 50/60Hz	6 W/m	250lm/m	3000K	60LED/m	65
CL-ST-SMD-2835-60-6-11065-4K	110-120 VAC 50/60Hz	6 W/m	250lm/m	4000K	60LED/m	65
CL-ST-SMD-5050-60-8-11065-RGB	110-120 VAC 50/60Hz	8 W/m		RGB	60LED/m	65

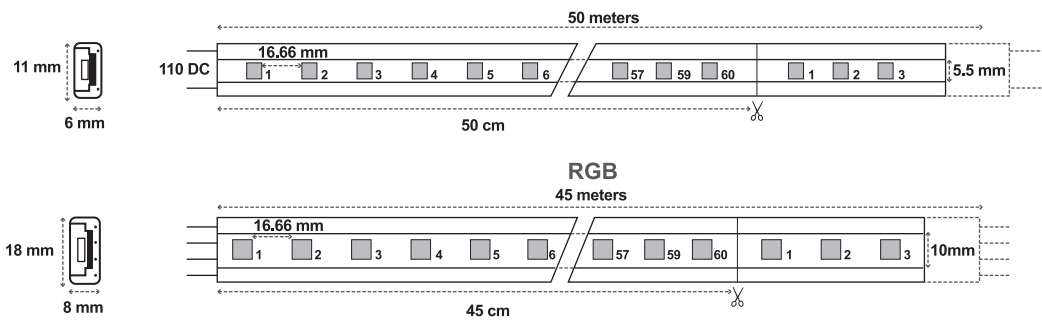

- o Installation accessories are available.
- o Each roll includes 2 middle connectors, 2 endcaps, 4 installation clips, and 1 power cord
- SMD 2835 is Triac dimmable
- Easy installation
- 50 m/roll in 2835 strips
- 45 m/roll in 5050 strips
- One rectifier can run one roll of strips
- Unique white PVC cover outlook
- cETL certificate



High Voltage 360° LED Strip Lights

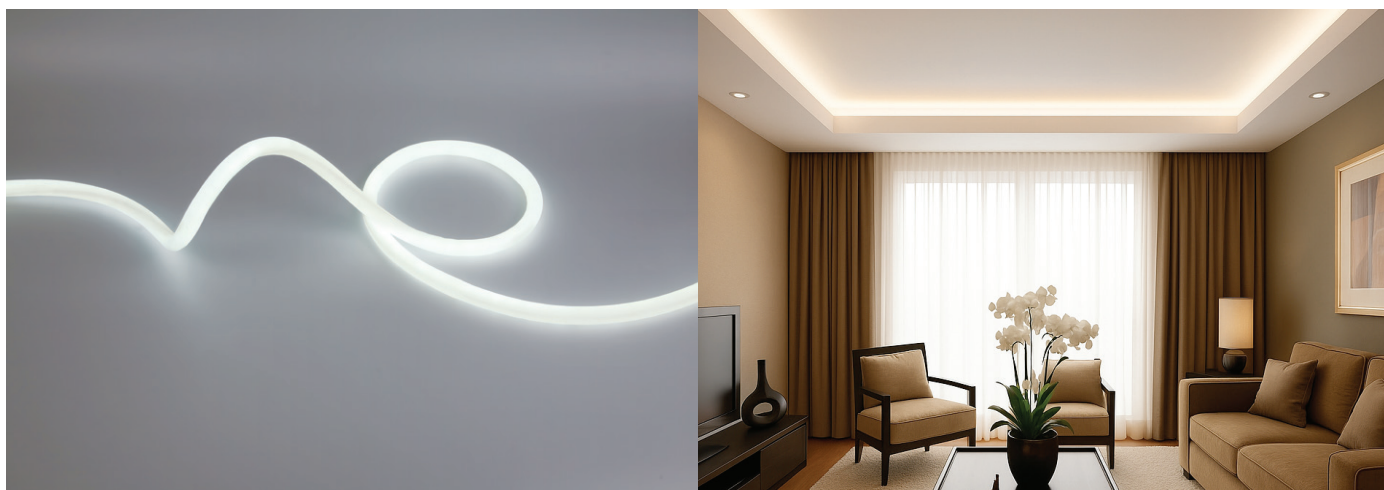

Product Code	Input Voltage	Power	Lumen	CCT	IP
CL-ST-360-7-11065-3K	110-120 VAC 50/60Hz	7W/m	60lm/W	3000K	65
CL-ST-360-7-11065-4K	110-120 VAC 50/60Hz	7W/m	60lm/W	4000K	65
CL-ST-360-7-11065-5K	110-120 VAC 50/60Hz	7W/m	60lm/W	5000K	65

Installation Accessories

CL-ST-360-11065-Clips

CL-ST-360-11065-End cap



CL-ST-360-11065-L connector

CL-ST-360-11065-Middle connector

CL-ST-360-11065-Rectifier



- Each roll includes 30 meters of strip light, one rectifier, 5pcs end caps, 20pcs clips, 40 pcs screws
- Diameter 13mm
- 2835 SMD LED - 144 pcs/m
- Length: 30m/Roll (98.43ft)
- Cutting size: 50cm
- cETL certificate

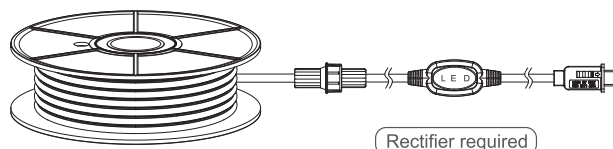

High Voltage 180° Dotless LED Strip Lights



Product Code	IN Voltage	Power	Lumen	CCT	IP
CL-ST-180-10-11065-3K	110-120VAC 50/60Hz	10W/m	700lm/m	3000K	65
CL-ST-180-10-11065-4K	110-120VAC 50/60Hz	10W/m	700lm/m	4000K	65
CL-ST-180-10-11065-5K	110-120VAC 50/60Hz	10W/m	700lm/m	5000K	65

Installation Accessories


CL-ST-180-11065-plug
1.5 meter plug with female connector

CL-ST-180-11065-middle connector
PCB to PCB no wire



CL-ST-180-11065-middle connector wire
PCB to PCB with wire

CL-ST-180-11065-clips

CL-ST-180-11065-end cap

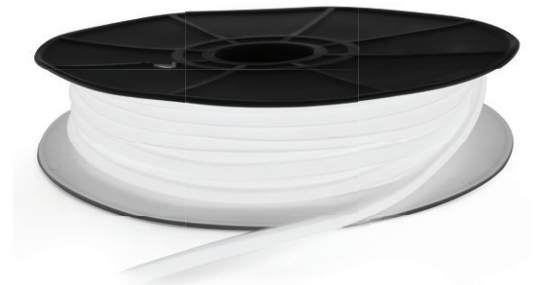

- Each roll includes 30 meters of strip light, 1.5m plug, 5pcs end caps, 20pcs clips, 40 pcs screws
- SMD2025 - 260 pcs/m
- Length: 30m/Roll (98.43ft)
- Cutting size: 5cm
- cETL certificate








Aluminum Profiles

cano light
Canadian Brightness


Aluminum Profiles





CL-Alu-0809 SL




CL-Alu-0809 BL



CL-Alu-0809A SL





CL-Alu-0809A BL




CL-Alu-510 SL

Available in 8ft and 10ft lengths





CL-Alu-510 BL

Available in 8ft and 10ft lengths



CL-Alu-510A SL





CL-Alu-510A BL



CL-Alu-509 SL

Available in 8ft and 10ft lengths





CL-Alu-509 BL

Available in 8ft and 10ft lengths




CL-Alu-508 SL

Available in 8ft and 10ft lengths





CL-Alu-508 BL

Available in 8ft and 10ft lengths





CL-Alu-613 SL



CL-Alu-613 BL




CL-Alu-613B-SL




CL-Alu-613B-BL

Dimensions are in millimeters



Aluminum Profiles





CL-Alu-617 SL





CL-Alu-617 BL





CL-Alu-5020 SL




CL-Alu-5020 BL





CL-Alu-1913S-SL





CL-Alu-1913S-BL




CL-Alu-619 SL




CL-Alu-619 BL



CL-Alu-632 SL




CL-Alu-712A SL




CL-Alu-10015 WH



CL-Alu-10015 BL



CL-Alu-10015 CH



- Available in 8ft and 10ft length subject to model number
- High quality PC cover, No yellowish outlook
- Accessories are available

Dimensions are in millimeters




Aluminum Profiles





CL-Alu-601 SL


Available in 8ft and 10ft lengths





CL-Alu-9836M WH



CL-Alu-9819





CL-Alu-7330





CL-Alu-5515 SL


Available in 8ft and 10ft lengths

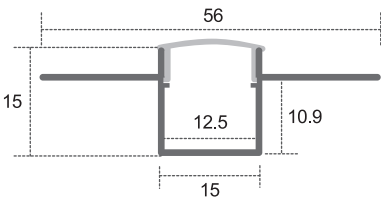


CL-Alu-5515 BL

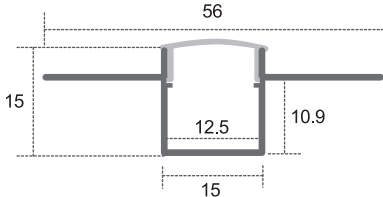



CL-Alu-5515A SL




CL-Alu-5020PH SL

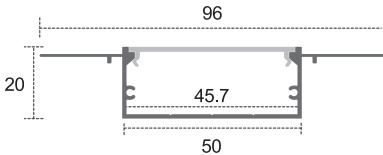


CL-Alu-4625 SL




CL-Alu-5324 SL




CL-Alu-3515 SL




CL-Alu-3515A SL



CL-Alu-6114 SL



CL-Alu-6114A SL




Dimensions are in millimeters


Bendable Aluminum Profiles





CL-Alu-7030
Straight aluminum profile




CL-Alu-7030 UD
Up & Down bendable aluminum profile

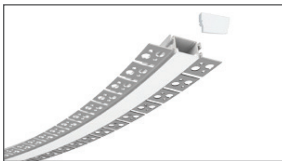


CL-Alu-7030 LR
Left & Right bendable aluminum profile

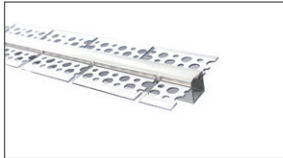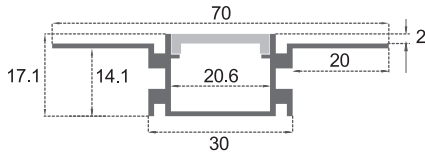



CL-Alu-1513
Multi direction bendable aluminum profile




CL-Alu-1913
Multi direction bendable aluminum profile



CL-Alu-640-SL
Up & Down bendable aluminum profile

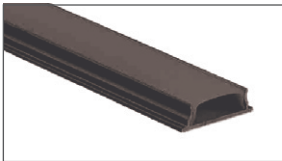


CL-Alu-640-BL
Up & Down bendable aluminum profile





IP Rated Aluminum Profiles




CL-ALU-1217-8FT
Available in Black & Silver



CL-Alu-1217A-8FT
Available in Black & Silver

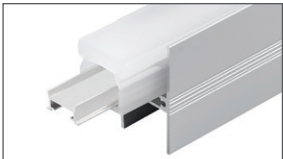

CL-Alu-2952 10ft length
Drive over In-ground aluminum profile



Dimensions are in millimeters



Bendable Aluminum profiles are 8ft length.



LED Track Light

cano light
Canadian Brightness

3-Wire Surface Mounted Tracks

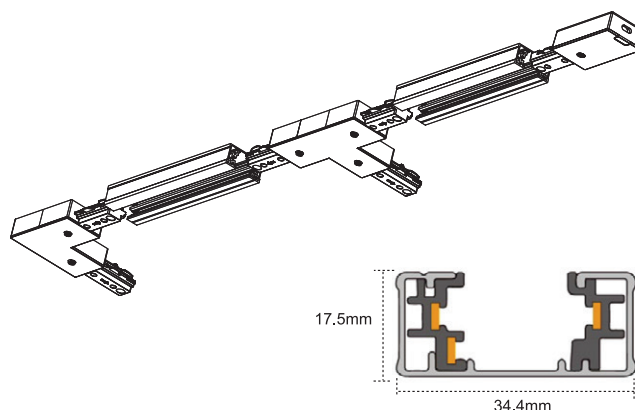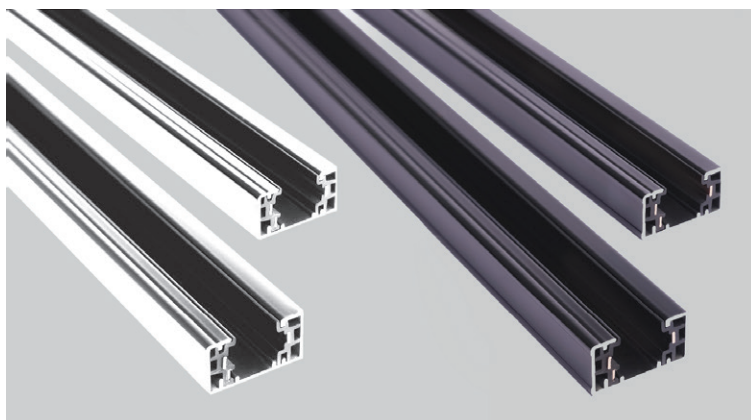


Product Code	Length	Color
CL-TR-4FT-WH	4 ft	White
CL-TR-4FT-BL		Black
CL-TR-6FT-WH	6 ft	White
CL-TR-6FT-BL		Black
CL-TR-8FT-WH	8 ft	White
CL-TR-8FT-BL		Black


Accessories




CL-TRAH-INT-WH
CL-TRAH-INT-BL




CL-TRAH-LCON-WH
CL-TRAH-LCON-BL




CL-TRAH-SCON-A-WH
CL-TRAH-SCON-A-BL




CL-TRAH-TCON-WH
CL-TRAH-TCON-BL




CL-TRAH-SCON-B-WH
CL-TRAH-SCON-B-BL




CL-TRAH-XCON-WH
CL-TRAH-XCON-BL




CL-TRAH-BSCON-WH
CL-TRAH-BSCON-BL




CL-TRAH-ENDCAP-WH
CL-TRAH-ENDCAP-BL



CL-TRAH-CONDUIT-WH
CL-TRAH-CONDUIT-BL
*To be used with CL-TRAH-INT.



CL-TRAH-JBOX-WH
CL-TRAH-JBOX-BL



LED Track Lights


Professional series



Compatible with HALO 3-wire single circuit track system

Product Code	Input Voltage	Power	Lumen	Beam Angle	Color Temp	Body Color
CL- TRLH-10W-5CCT-30D-WH	120 VAC	10 W	1000lm	30°	5 CCT Adjustable	White
CL- TRLH-10W-5CCT-30D-BL	120 VAC	10 W	1000lm	30°	2700K	Black
CL- TRLH-20W-5CCT-36D-WH	120 VAC	20 W	2000lm	36°	3000K	White
CL- TRLH-20W-5CCT-36D-BL	120 VAC	20 W	2000lm	36°	3500K	Black
					4000K	
					5000K	

Installation accessories are available.

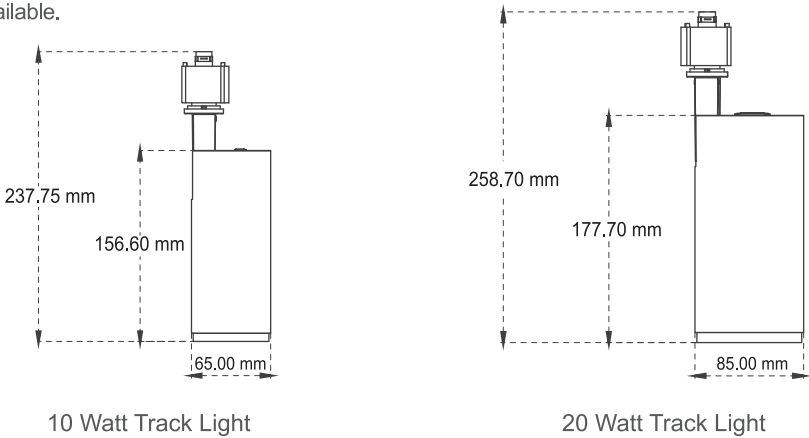

AC 110V 50/60Hz

TRIAC DIMMABLE

CRI >90

DRY LOCATION

5 YEARS WARRANTY

Lifetime >50,000 hrs

Working Temperature -20°C to +40°C


- PMMA lens
- Rotation 350° horizontal, 90° vertical
- cETL certificate

DOB LED Track Lights





Compatible with HALO 3-wire single circuit track system

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle	Body Color
CL-TRLH2-10W-5CCT-45D-WH	120 VAC	10 W	800lm	5 CCT Adjustable	45°	White
CL-TRLH2-10W-5CCT-45D-BL	120 VAC	10 W	800lm	2700K 3000K	45°	Black
CL-TRLH2-20W-5CCT-45D-WH	120 VAC	20 W	1600lm	3500K 4000K	45°	White
CL-TRLH2-20W-5CCT-45D-BL	120 VAC	20 W	1600lm	5000K	45°	Black

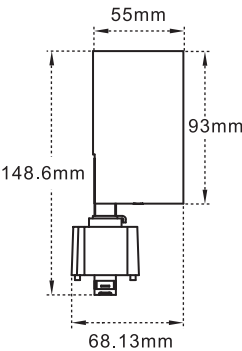

10 Watt Track Light

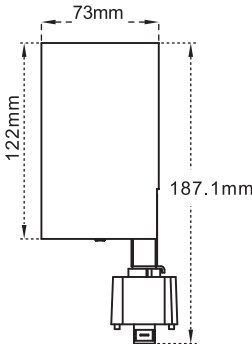

20 Watt Track Light




- PMMA lens
- Rotation 350° horizontal, 90° vertical
- cETL certificate

LED Pendant Track Light



Compatible with HALO 3-wire single circuit track system

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle	Body Color
CL-TRLH-P74-10W-3CCT-WH	120VAC	10W	800lm	3CCT Adjustable 3000K-4000K-5000K	32°	White
CL-TRLH-P74-10W-3CCT-BL						Black

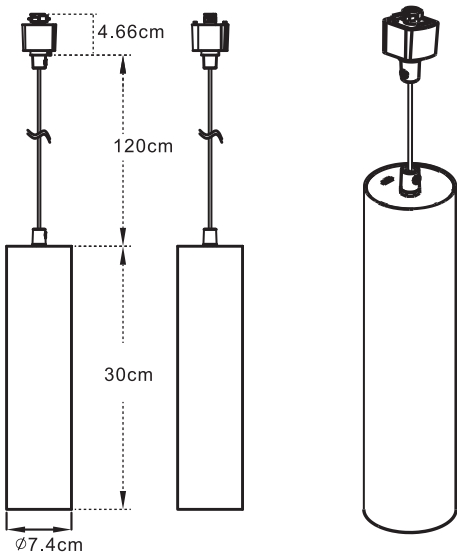

• cETL certificate

LED Track Lights | Zoomable Multi-mount

Default setup comes with a 3-wire (Halo) compatible track adapter with multiple mounting options available



Honeycomb included



CL-TRLH3-10W-5CCT-PDA




CL-TRLH3-20W-5CCT-PDA




CL-TRLH3-30W-5CCT-PDA


Product Code	IN Voltage	Power	Lumen	Color Temp	Beam Angle	Body Color
CL-TRLH3-10W-5CCT-PDA-WH	120 VAC	6W/8W/10W Adjustable	85lm/W	5 CCT Adjustable	24° - 60° Adjustable	White
CL-TRLH3-10W-5CCT-PDA-BL						Black
CL-TRLH3-20W-5CCT-PDA-WH	120 VAC	10W/15W/20W Adjustable	85lm/W	2700K	24° - 60° Adjustable	White
CL-TRLH3-20W-5CCT-PDA-BL				3000K		Black
				3500K		
CL-TRLH3-30W-5CCT-PDA-WH	120 VAC	20W/25W/30W Adjustable	85lm/W	4000K	24° - 60° Adjustable	White
CL-TRLH3-30W-5CCT-PDA-BL				5000K		Black

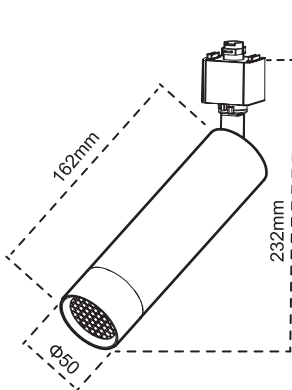


CL-TRLH3-10W-5CCT-PDA

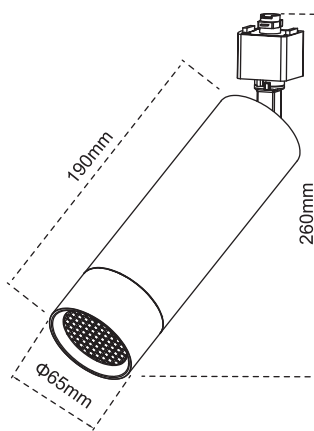

CL-TRLH3-20W-5CCT-PDA

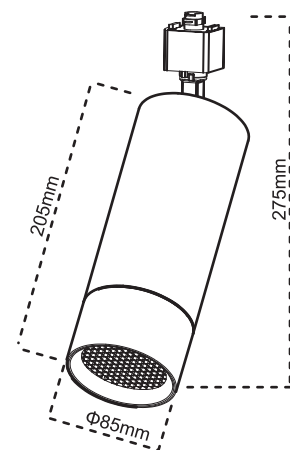

CL-TRLH3-30W-5CCT-PDA



- PMMA lens
- Rotation 350° horizontal, 90° vertical
- cETL certificate

LED Track Lights | Zoomable Multi-mount Accessories


Default setup comes with a 3-wire (Halo) compatible track adapter with multiple mounting options available.




Juno KIT	Body Color
CL-TRAH3-Jbase-WH	White
CL-TRAH3-Jbase-BL	Black
Juno base for CL-TRLH3 series	




PENDANT KIT	Body Color
CL-TRAH3-PENDANT-10-WH	White
CL-TRAH3-PENDANT-10-BL	Black
Suitable for: CL-TRLH3-10W-5CCT-PDA	
CL-TRAH3-PENDANT-20-WH	White
CL-TRAH3-PENDANT-20-BL	Black
Suitable for: CL-TRLH3-20W-5CCT-PDA	
CL-TRAH3-PENDANT-30-WH	White
CL-TRAH3-PENDANT-30-BL	Black
Suitable for: CL-TRLH3-30W-5CCT-PDA	

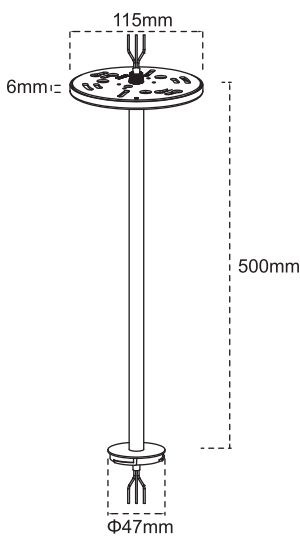

CL-TRAH3-PENDANT-10

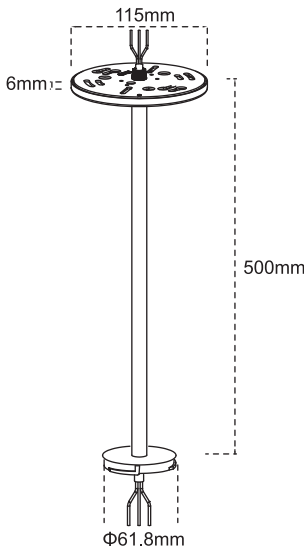

CL-TRAH3-PENDANT-20

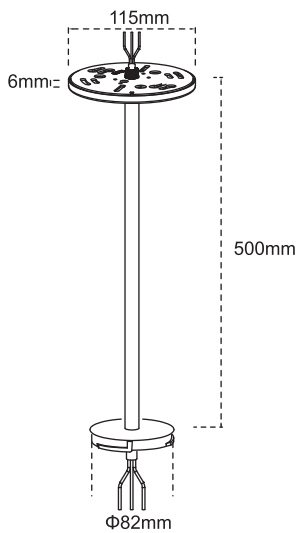

CL-TRAH3-PENDANT-30

LED Track Lights | Zoomable Multi-mount Accessories

Default setup comes with a 3-wire (Halo) compatible track adapter with multiple mounting options available.

SURFACE MOUNTED KIT

Body Color

CL-TRAH3-SM-10-WH

White

CL-TRAH3-SM-10-BL

Black

Suitable for: CL-TRLH3-10W-5CCT-PDA

CL-TRAH3-SM-20-WH

White

CL-TRAH3-SM-20-BL

Black

Suitable for: CL-TRLH3-20W-5CCT-PDA


CL-TRAH3-SM-30-WH

White


CL-TRAH3-SM-30-BL

Black


Suitable for: CL-TRLH3-30W-5CCT-PDA



CL-TRAH3-SM-10



CL-TRAH3-SM-20



CL-TRAH3-SM-30

RECESSED MOUNTED KIT

Body Color

CL-TRAH3-RM-10-WH

White

CL-TRAH3-RM-10-BL

Black

Suitable for: CL-TRLH3-10W-5CCT-PDA

CL-TRAH3-RM-20-WH

White

CL-TRAH3-RM-20-BL

Black

Suitable for: CL-TRLH3-20W-5CCT-PDA


CL-TRAH3-RM-30-WH

White


CL-TRAH3-RM-30-BL

Black


Suitable for: CL-TRLH3-30W-5CCT-PDA



CL-TRAH3-RM-10



CL-TRAH3-RM-20



CL-TRAH3-RM-30



Up & Down LED Linear Lights




Low Bay DLC Listed



Product Code	Power	Lumen	CCT	Beam angle	Length
CL-LL1-225-3CCT	Adjustable 15/20/25W	130lm/W	3CCT	120° Diffused	2 ft
CL-LL1-450-3CCT	Adjustable 30/40/50W	130lm/W	Adjustable 3000K 3500K 4000K	120° Diffused	4 ft
CL-LL1-8100-3CCT	Adjustable 60/80/100W	130lm/W		120° Diffused	8 ft

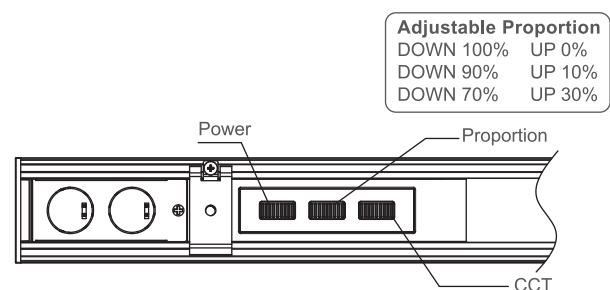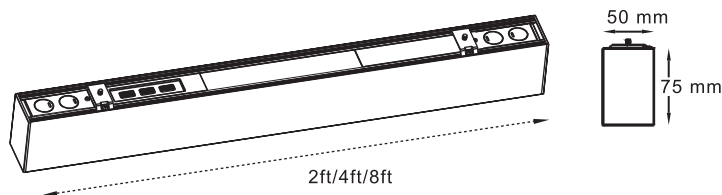

- Body Color available in Black and White
- Seamless connection
- Input Voltage: 120-347VAC 50/60Hz
- Bridgelux LED chip
- Flicker free isolated driver
- Pendant/Surface/Recessed/Wall-mount/T-bar installation kits are available
- cUL Certificate




Up & Down LED Linear Light Accessories


Body Color available in Black and White




CL-LL1A-CROSS
Cross corner

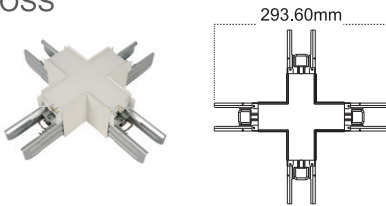


CL-LL1A-T corner
T corner




CL-LL1A-V120 corner
120 degree connector

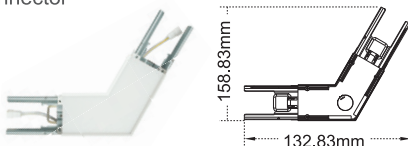


CL-LL1A-L corner
L corner

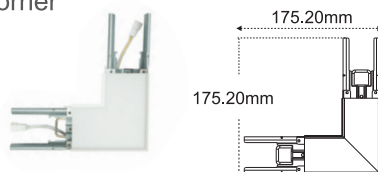

CL-LL1A-Y corner
Y connector

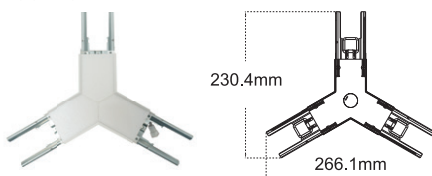

CL-LL1A-SCON
Straight connector




CL-LL1A-WMA
Wall mount



CL-LL1A-PC cover
Diffuser




CL-LL1A-surface mount kit
Surface mount kit

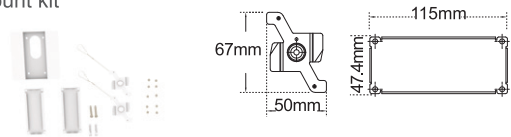


CL-LL1A-PKC
Canopy pendant kit



CL-LL1A-AC wire
AC Wire with connector




CL-LL1A-Safety wire
Safety wire




CL-LL1A-PSMC
Plug in sensor



CL-LL1A-PSMI
Plug in sensor

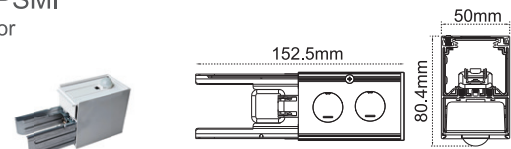

CL-LL1A-PSMI-PRO
Plug in sensor

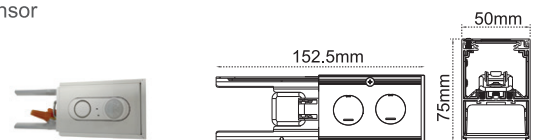

CL-LL1A-PSMI-PRO-REMOTE
Remote controller for CL-LL1A-PSMI-PRO



CL-LL1A-RK2 Recessed Kit 2ft

CL-LL1A-RK4 Recessed Kit 4ft

CL-LL1A-RK8 Recessed Kit 8ft







LED Downlights

canolight
Canadian Brightness

Surface-mount Rotatable LED Downlights




Product Code	Input Voltage	Power	Lumen	Beam Angle	Color Temp	Body Color
CL-DL4-RS-24W-36D-3CCT-WH	120-277 VAC	24W	2160lm	36°	3 CCT	White
CL-DL4-RS-24W-36D-3CCT-BL	120-277 VAC	24W	2160lm	36°	<u>Adjustable</u>	Black
CL-DL4-RS-35W-24D-3CCT-WH	120-277 VAC	35W	3150lm	24°	3000K	White
CL-DL4-RS-35W-24D-3CCT-BL	120-277 VAC	35W	3150lm	24°	4000K	White
					5000K	Black

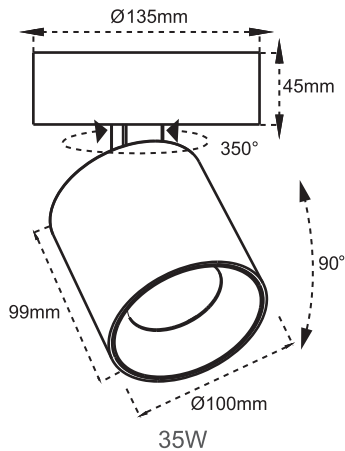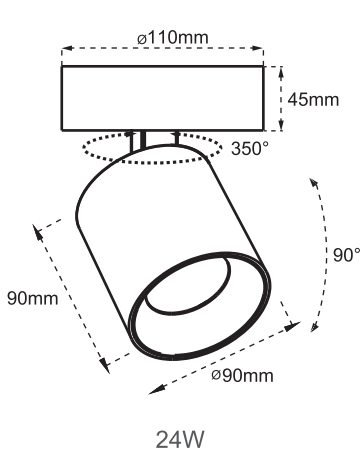


- Aluminum body and heat sink
- 350° rotatable, 90° tiltable
- cETL listed


Surface-mount & Pendant LED Downlights

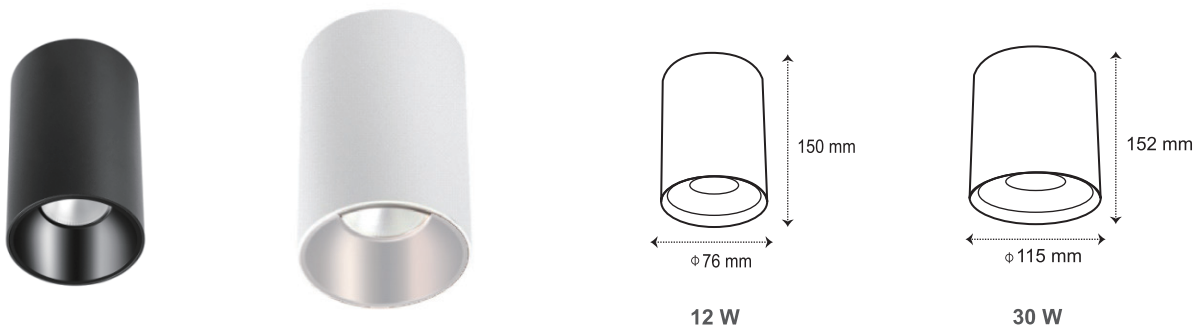

Product Code	Power	Lumen	CCT	Beam Angle
CL-DL2-RS-12W-30D-3K	12W	1080lm	3000K	30°
CL-DL2-RS-12W-30D-4K	12W	1080lm	4000K	30°
CL-DL2-RS-30W-35D-3K	30W	2400lm	3000K	35°
CL-DL2-RS-30W-35D-4K	30W	2400lm	4000K	35°

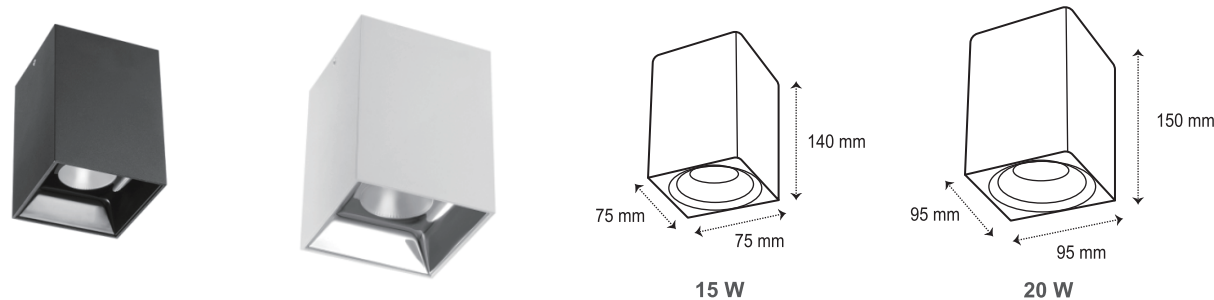


Product Code	Power	Lumen	CCT	Beam Angle
CL-DL2-SS-15W-30D-3K	15W	1350lm	3000K	30°
CL-DL2-SS-15W-30D-4K	15W	1350lm	4000K	30°
CL-DL2-SS-20W-30D-3K	20W	1800lm	3000K	30°
CL-DL2-SS-20W-30D-4K	20W	1800lm	4000K	30°




Surface-mount & Pendant LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL2-SD-12W-30D-3K	120VAC 50/60Hz	12W	1080lm	3000K	30°
CL-DL2-SD-12W-30D-4K	120VAC 50/60Hz	12W	1080lm	4000K	30°
CL-DL2-SD-20W-30D-3K	120VAC 50/60Hz	20W	1800lm	3000K	30°
CL-DL2-SD-20W-30D-4K	120VAC 50/60Hz	20W	1800lm	4000K	30°

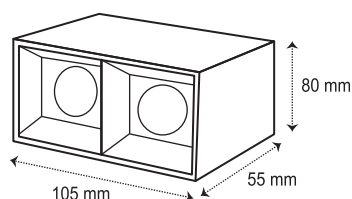

12W

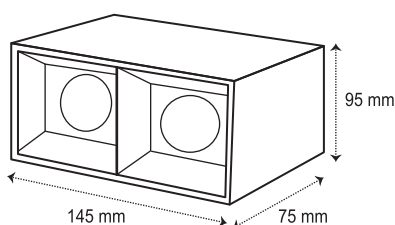

20W




Pendant kit

Body Color:

Black Body, Black Reflector | White Body, White Reflector

- Surface & Pendant installation
- Junction box cover is included
- OSRAM COB LED chip
- cETL approved



Surface-Mounte Downlights





CL-DL7-D20-5CCT





CL-DL7-S10-5CCT

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL7-S10-5CCT-WH	120VAC 50/60Hz	10W	750lm	5CCT Adjustable 2700K-3000K 3500K-4000K-5000K	55°
CL-DL7-S10-5CCT-BL					
CL-DL7-D20-5CCT-WH	120VAC 50/60Hz	20W	1500lm	5CCT Adjustable 2700K-3000K 3500K-4000K-5000K	55°
CL-DL7-D20-5CCT-BL					

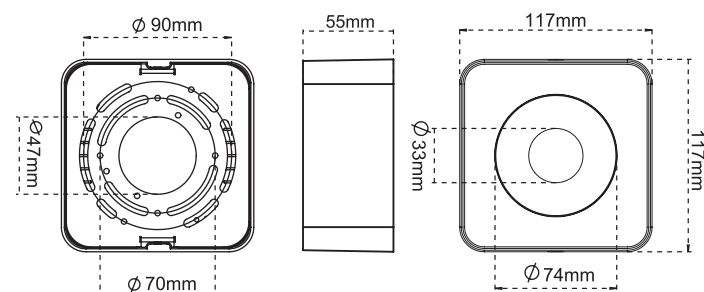

CL-DL7-S10-5CCT

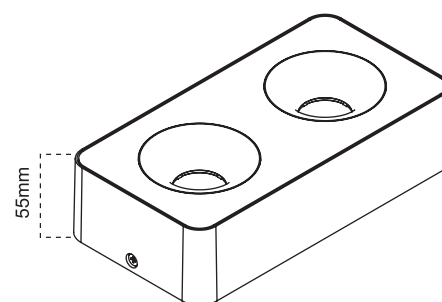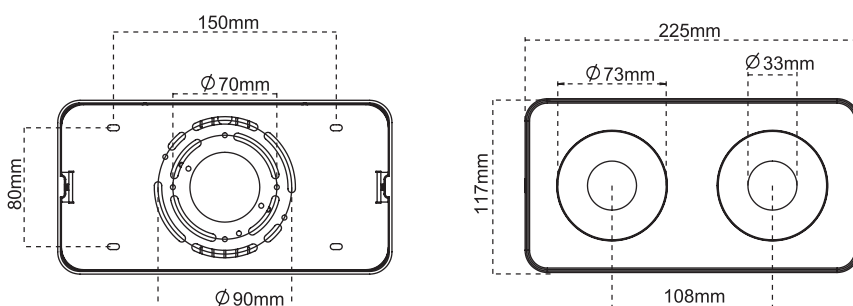

CL-DL7-D20-5CCT





• cETL listed

Pendant LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL2-PR1-1032-3K	AC 120V	10W	1000lm	3000K	36°
CL-DL2-PR1-1032-4K	AC 120V	10W	1000lm	4000K	36°

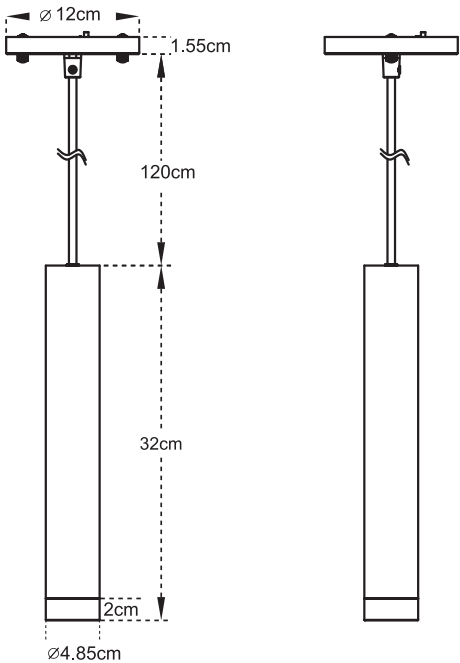

Available in White and Black body color

- Input Voltage:120VAC 50/60Hz
- cETL approved

Recessed Linear Blade




CL-LB5-T1-10-38D




CL-LB10-T1-20-38D

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-LB5-T1-10-38D-3K	120VAC 50/60Hz	10W	600lm	3000K	38°
CL-LB5-T1-10-38D-4K	120VAC 50/60Hz	10W	600lm	4000K	38°
CL-LB10-T1-20-38D-3K	120VAC 50/60Hz	20W	1650lm	3000K	38°
CL-LB10-T1-20-38D-4K	120VAC 50/60Hz	20W	1650lm	4000K	38°

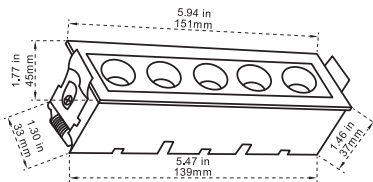

L5.79 * W1.38 in
L147 * W35 mm

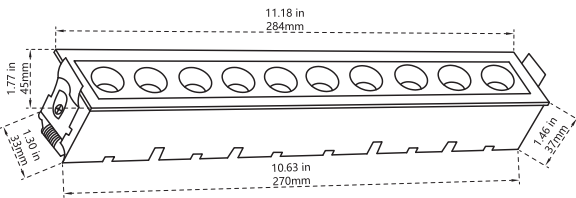

L11 * W1.38 in
L281 * W35 mm


- Body Color: Black | White
- Installation plate is available
- cETL certificate




Recessed Linear Spot Light



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-LBS2-6-5CCT-WH	120VAC 50/60Hz	6W	330lm	5CCT	40°
CL-LBS2-6-5CCT-BL	120VAC 50/60Hz	6W	330lm	Adjustable	40°
CL-LBS5-15-5CCT-WH	120VAC 50/60Hz	15W	830lm	2700K-3000K	40°
CL-LBS5-15-5CCT-BL	120VAC 50/60Hz	15W	830lm	3500K-4000K-5000K	40°

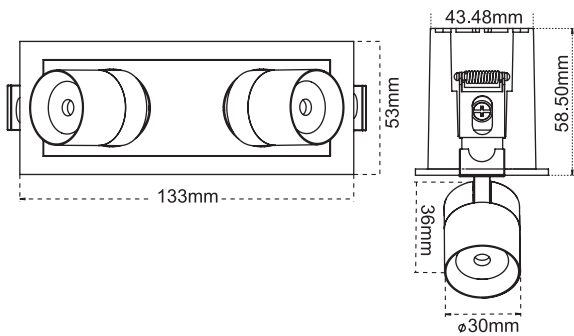

CL-LBS2-6-5CCT

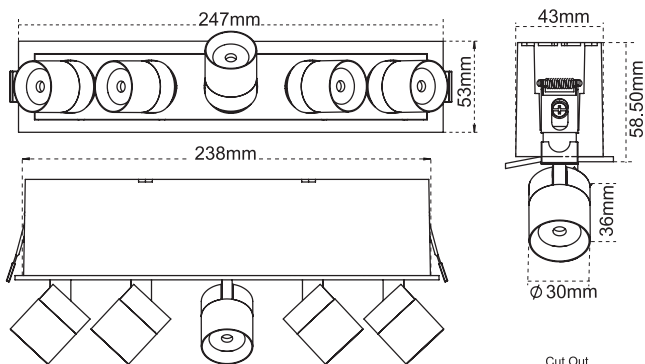

CL-LBS5-15-5CCT



• cETL listed



Anti-Glare Recessed Tiltable LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL5-R-12W-36D-5CCT-BL	120VAC 50/60Hz	12W	750lm	5CCT 2700K-3000K-3500K	36°
CL-DL5-R-12W-36D-5CCT-WH	120VAC 50/60Hz	12W	750lm	4000K-5000K	36°
CL-DL5-R-20W-36D-5CCT-BL	120VAC 50/60Hz	20W	1650lm	5CCT 2700K-3000K-3500K	36°
CL-DL5-R-20W-36D-5CCT-WH	120VAC 50/60Hz	20W	1650lm	4000K-5000K	36°

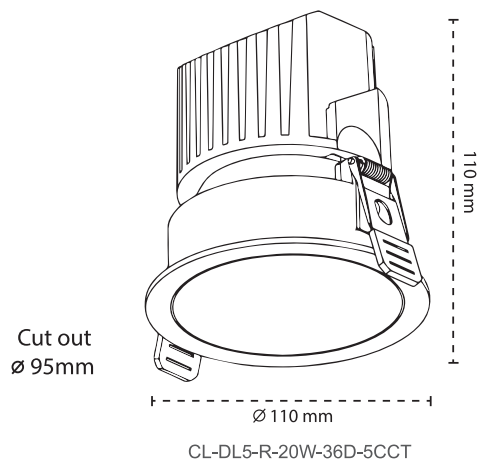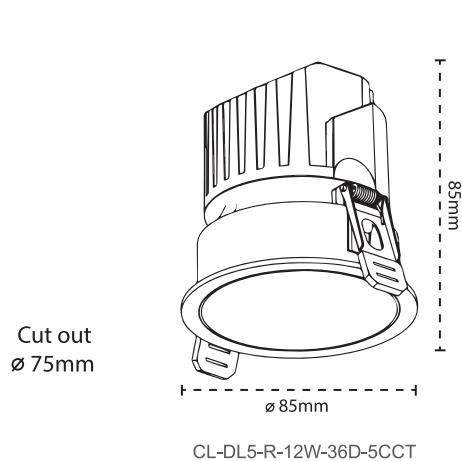

- Black Body, Black Reflector | White Body, White Reflector
- Installation plate is available
- cETL certificate




3-Inch Square Butterfly Downlights




Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle	Body Color
CL-DL6-S9-5CCT	120-277 VAC	9W	840lm	5CCT Adjustable	38°	Available in White & Black
CL-DL6-D18-5CCT	120-277 VAC	18W	1640lm	2700K 3000K 3500K 4000K 5000K	38°	



Cut out: 75 mm




Cut out: $\varnothing$ 75mm




CL-DL6-S9-5CCT




Cut Out: 141x75mm

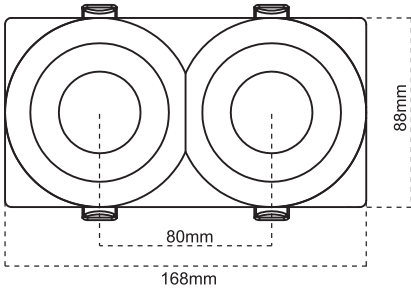

168mm

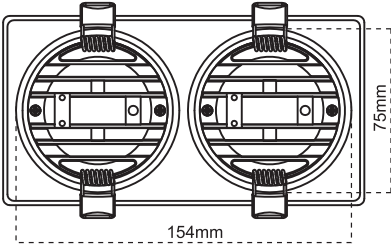


154mm



$\varnothing$ 38mm

CL-DL6-D18-5CCT



• cETL listed

Anti-glare Recessed Downlights




CL-DL1-S-15-36D



CL-DL1-D-30-36D


Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL1-S-15-36D-3K	120VAC 50/60Hz	15W	1050lm	3000K	36°
CL-DL1-S-15-36D-4K	120VAC 50/60Hz	15W	1050lm	4000K	36°
CL-DL1-D-30-36D-3K	120VAC 50/60Hz	30W	2100lm	3000K	36°
CL-DL1-D-30-36D-4K	120VAC 50/60Hz	30W	2100lm	4000K	36°



Cut Out



φ 3.74 in
φ 95 mm

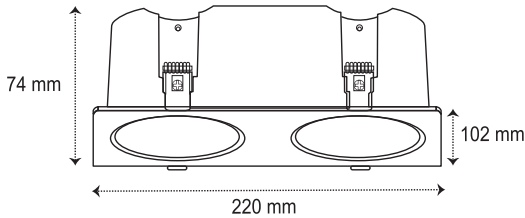

Cut Out



L8.07 * W3.74 in
L205 * W95 mm




- Body Color: Black | White
- Reflector color: Black | White | Gold
- Installation plate is available
- cETL certificate



2-Inch Modular LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL3-2007-38D-5CCT	120VAC 50/60Hz	7W	560lm	5CCT Adjustable 2700K,3000K,3500K,4000K,5000K	38°







- Interchangeable components for easy customization and maintenance.
- Installation plate is available
- cETL certificate



2-Inch Modular LED Downlights Frames




CL-DL3-2R

Round Frame with Trim
Body Color available in Black and White

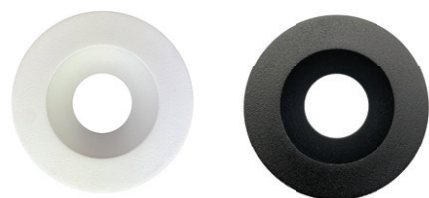


CL-DL3-2RT


Round Frame Trimless
Body Color available in Black and White



3-Inch Modular LED Downlights

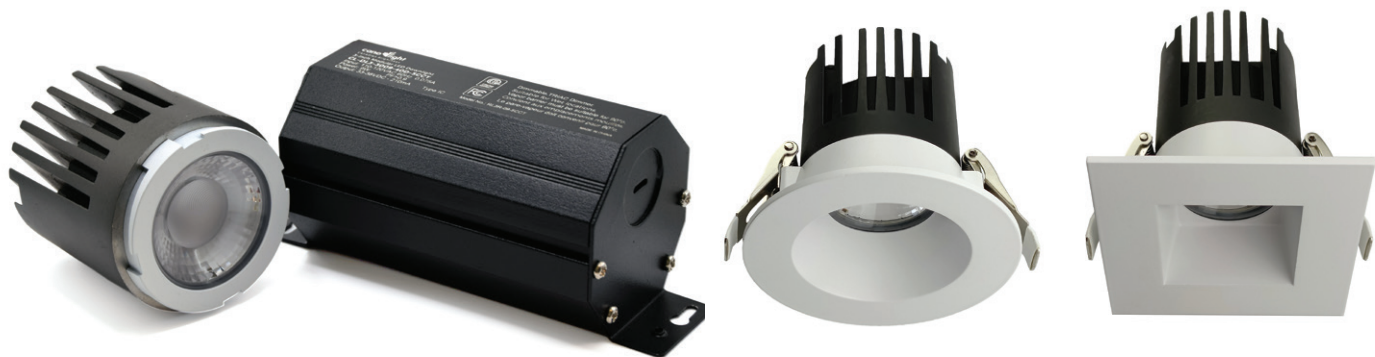



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL3-3009-40D-5CCT	120VAC 50/60Hz	9W	750lm	5CCT Adjustable 2700K,3000K,3500K,4000K,5000K	40°

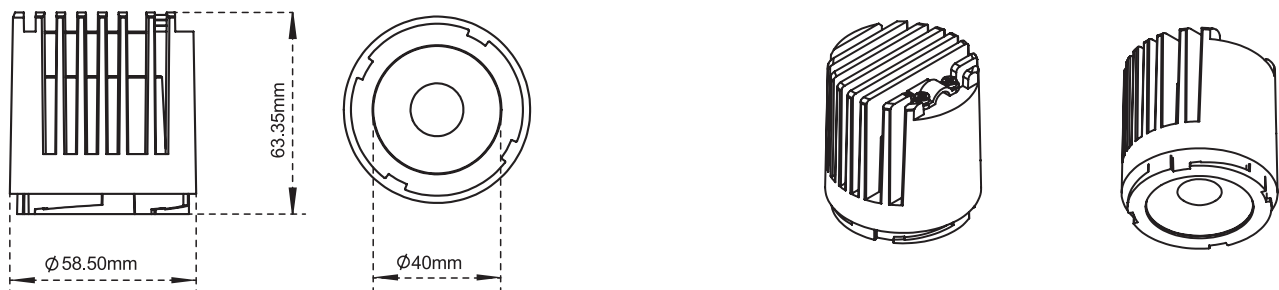


- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- Installation plate is available
- cETL certificate



3-Inch DIM to Warm Modular LED Downlights

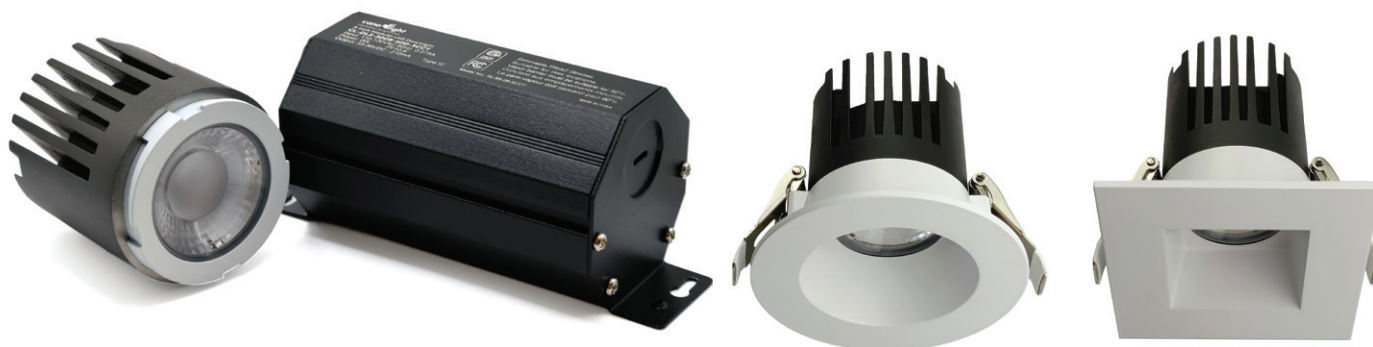

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL3-DTW-3009-40D	120VAC 50/60Hz	9W	780lm	DIM TO WARM 1800K > 3000K	40°

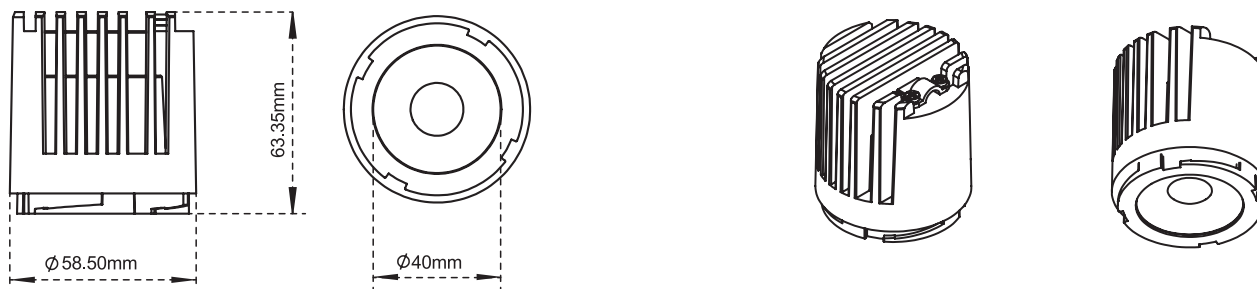


- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- Installation plate is available
- cETL certificate




3-Inch Modular LED Downlights Frames


CL-DL3-3R
Round Frame with Trim

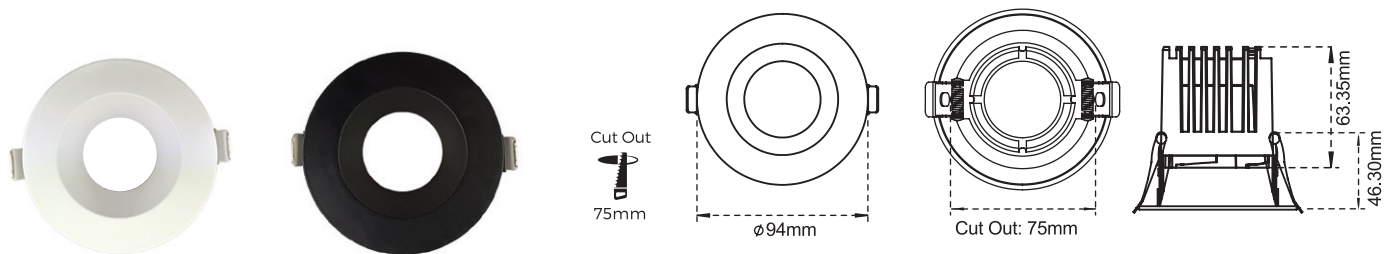


CL-DL3-3RT
Trim-less Round Frame

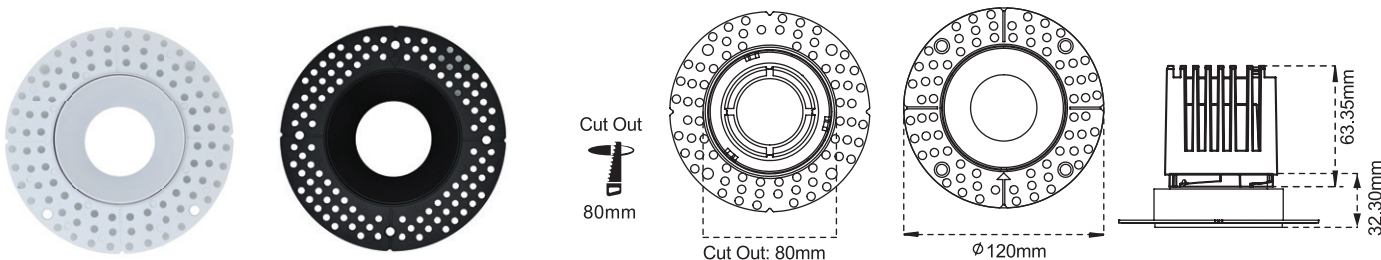

CL-DL3-3S
Square Frame with Trim

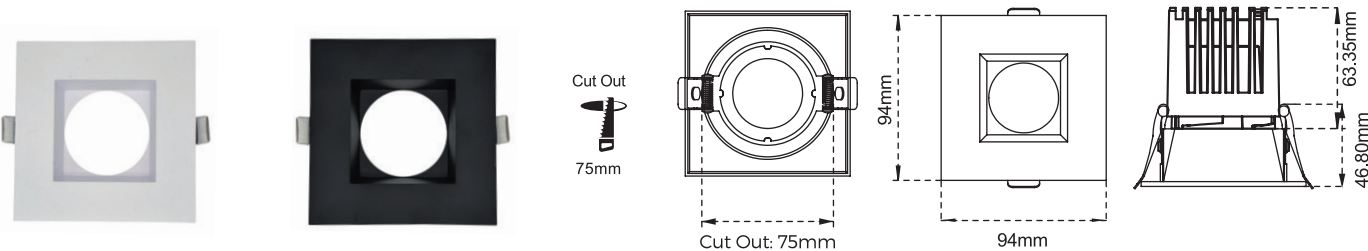

CL-DL3-3ST
Trim-less Square Frame

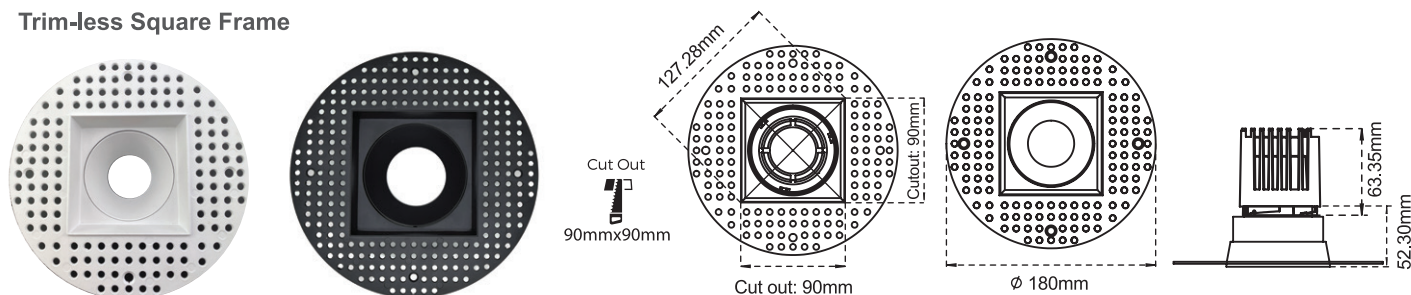


- Body Color available in Black and White
- cETL Certificate
- 5-Year Warranty



3-inch Modular LED Downlights | Tilttable Round Frames



CL-DL3-T3R-WH






CL-DL3-T3R-BL

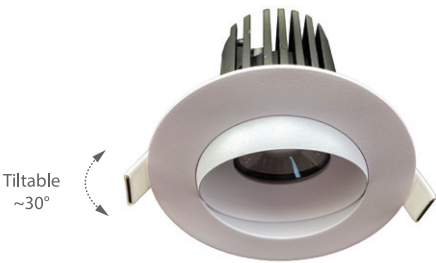

Cut Out

88 mm




Tilttable Round Frame with Trim



CL-DL3-T3RT-WH






CL-DL3-T3RT-BL

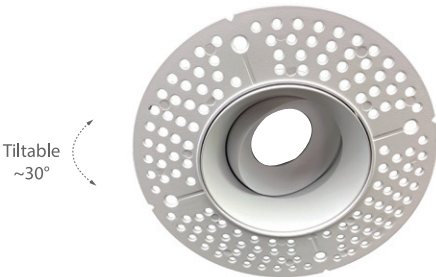

Cut Out

95 mm



Trim-less Tilttable Round Frame



3-inch Modular LED Downlights | Double Frames




CL-DL3-3R-D-WH




CL-DL3-3R-D-BL

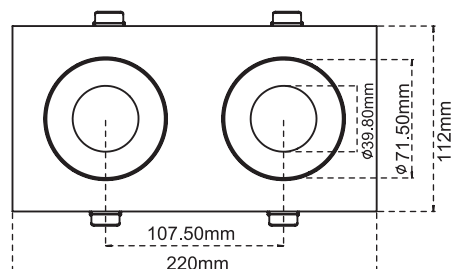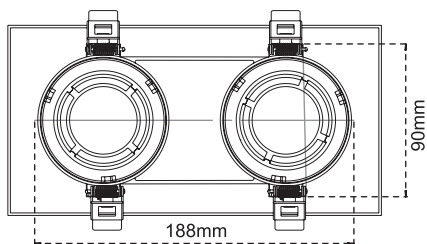



Double Round Frame With Trim




CL-DL3-3RT-D-WH




CL-DL3-3RT-D-BL

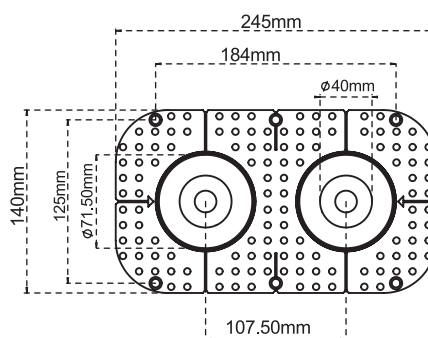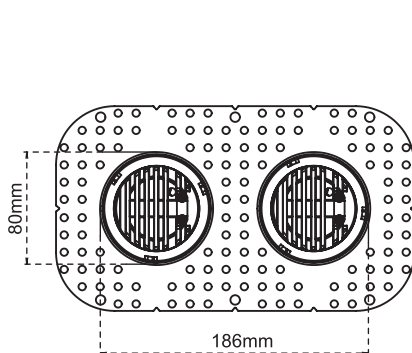



Trim-less Double Round Frame



CL-DL3-3ST-D-WH



CL-DL3-3ST-D-BL



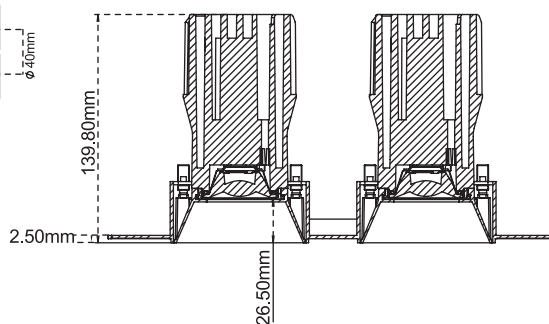
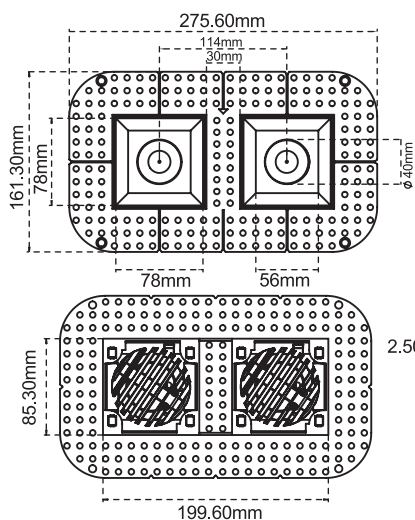


Trim-less Double Square Frame

3.5-Inch Modular LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-DL3-3512-40D-5CCT	120VAC 50/60Hz	12W	1050lm	5CCT Adjustable 2700K,3000K,3500K,4000K,5000K	40°




Installation plate is available





- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- cETL certificate




3.5-Inch DIM to Warm Modular LED Downlights



Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL3-DTW-3512-40D	120VAC 50/60Hz	12W	960lm	DIM TO WARM 1800K > 3000K	40°




- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- Installation plate is available
- cETL certificate




3.5-Inch Modular LED Downlights Frames


CL-DL3-3.5R
Round Frame with Trim

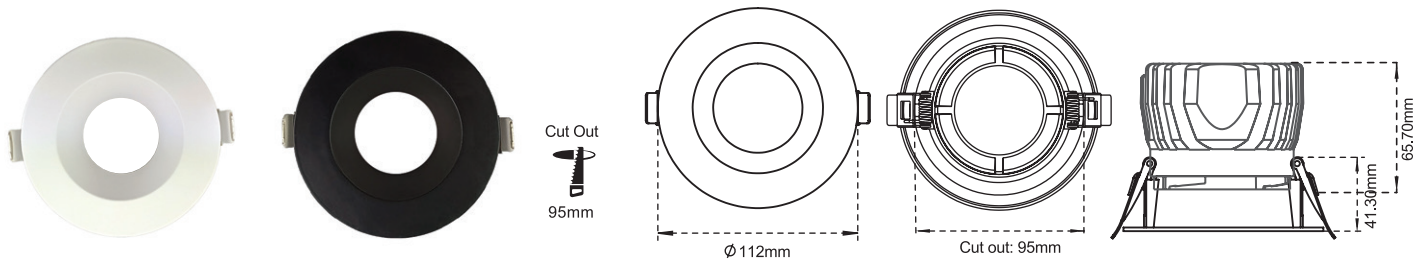


CL-DL3-3.5RT
Trim-less Round Frame

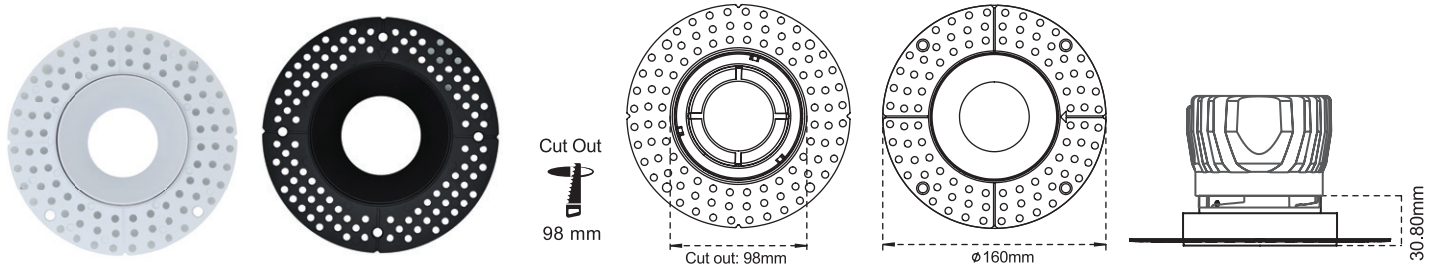

CL-DL3-3.5S
Square Frame with Trim

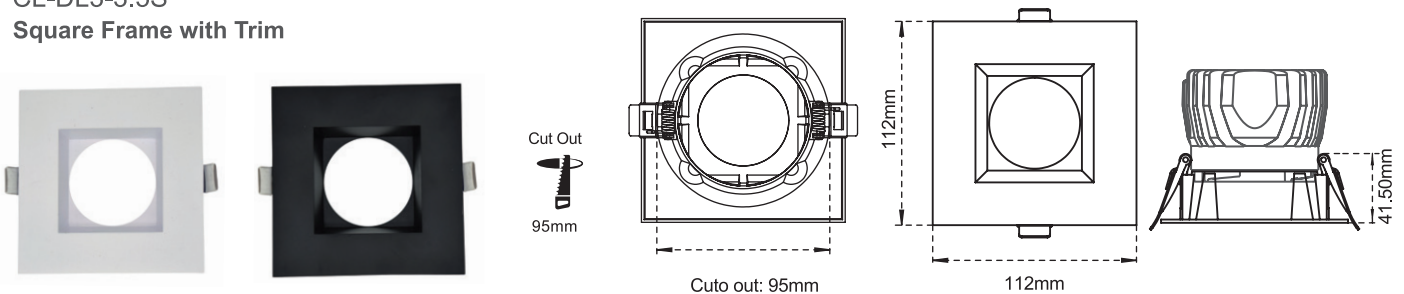


CL-DL3-3.5ST
Trim-less Square Frame

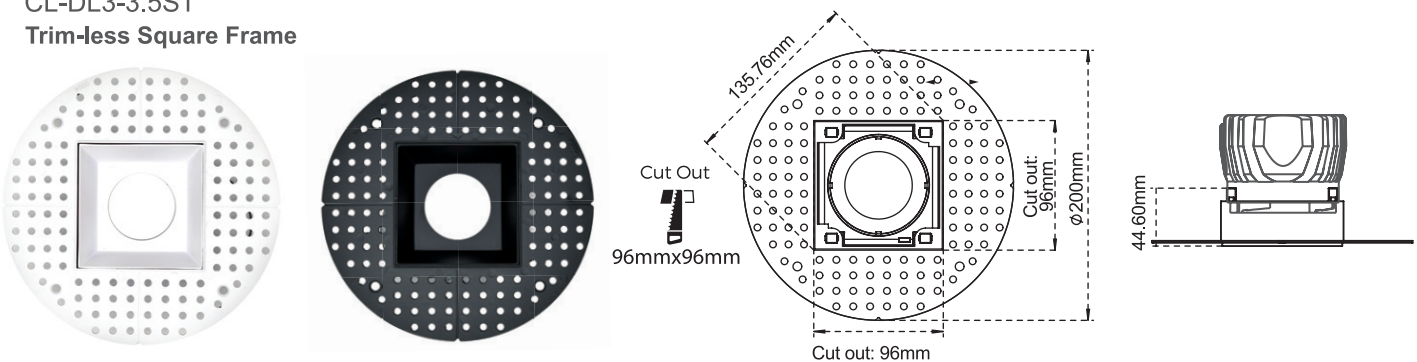


- Body Color available in Black and White
- cETL Certificate
- 5-Year Warranty

4-Inches Modular LED Downlights

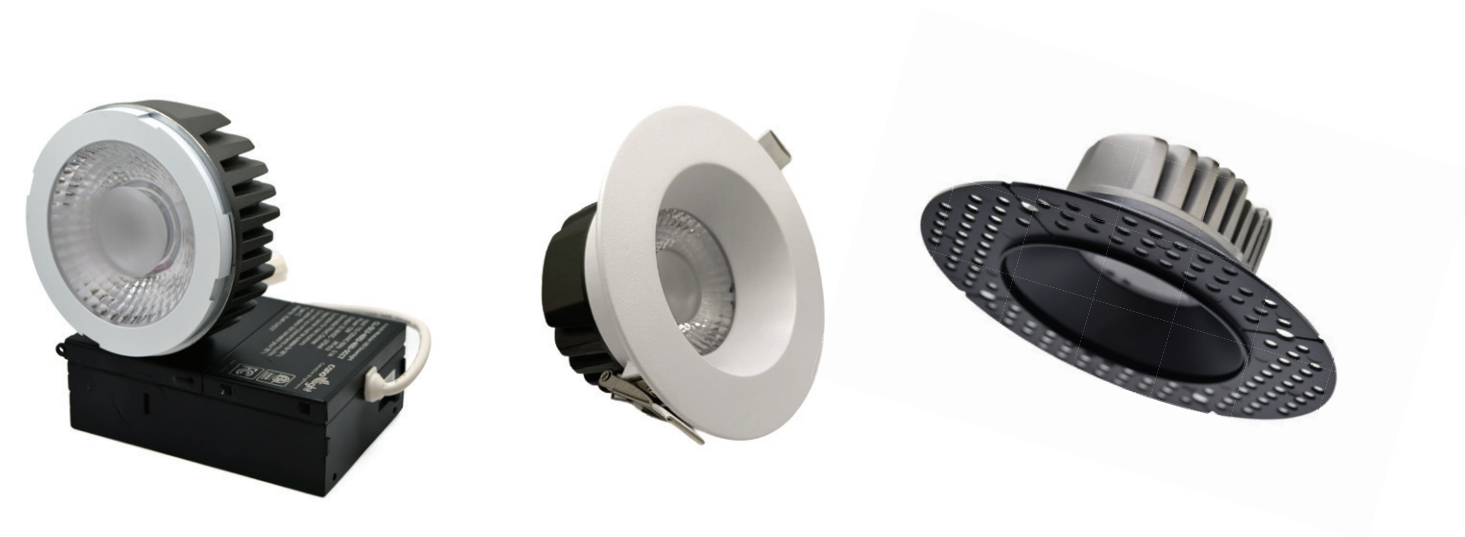

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam angle
CL-DL3-4012-40D-5CCT	120VAC 50/60Hz	12W	1100lm	5CCT Adjustable 2700K,3000K,3500K,4000K,5000K	40°

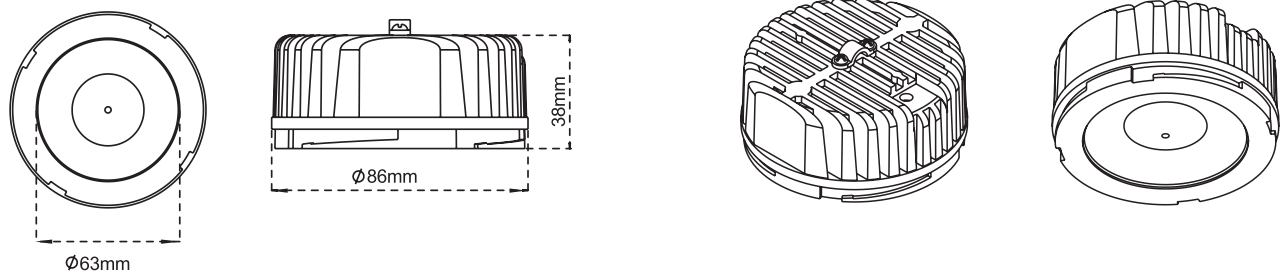


Installation plate is available





- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- cETL certificate




4-Inch DIM to Warm Modular LED Downlights

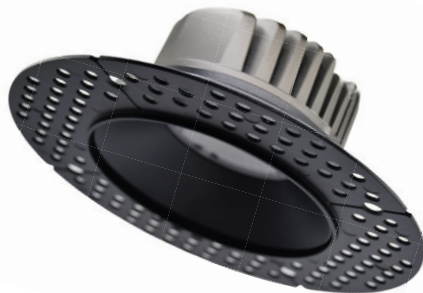

Product Code	Input Voltage	Power	Lumen	Color Temp	Beam Angle
CL-DL3-DTW-4012-40D	120VAC 50/60Hz	12W	1100lm	DIM TO WARM 1800K > 3000K	40°




- Interchangeable components for easy customization and maintenance.
- Frames available in round or square shapes, with trim or trimless options, in white or black finishes.
- Installation plate is available
- cETL certificate



4-inch Modular LED Downlights Frames


CL-DL3-4R

Round Frame with Trim

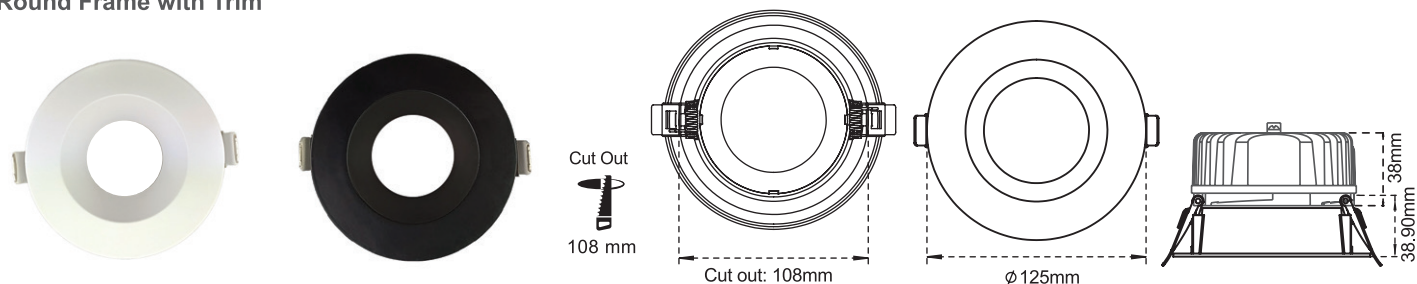


CL-DL3-4RT

Trim-less Round Frame

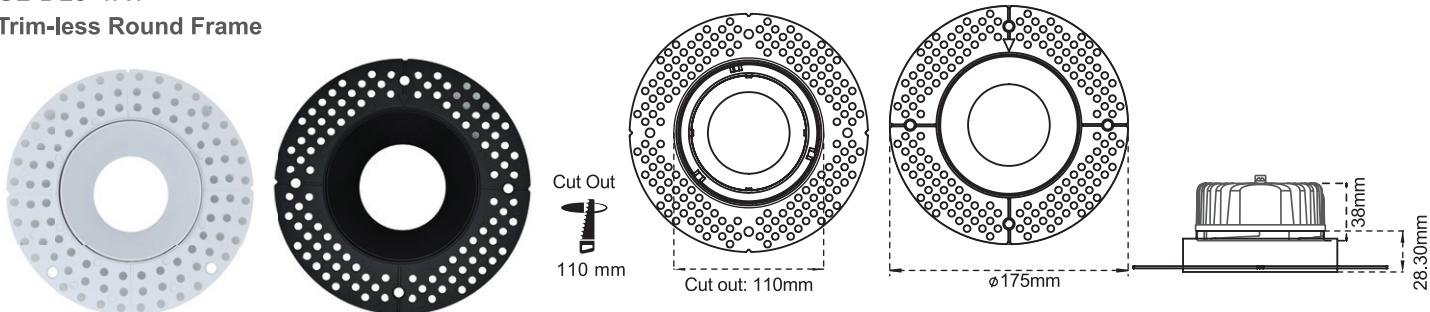


CL-DL3-4S

Square Frame with Trim

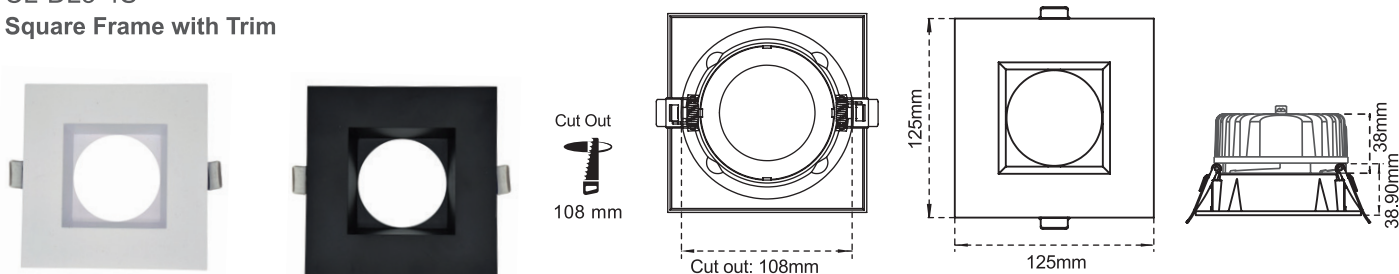


CL-DL3-4ST

Trim-less Square Frame



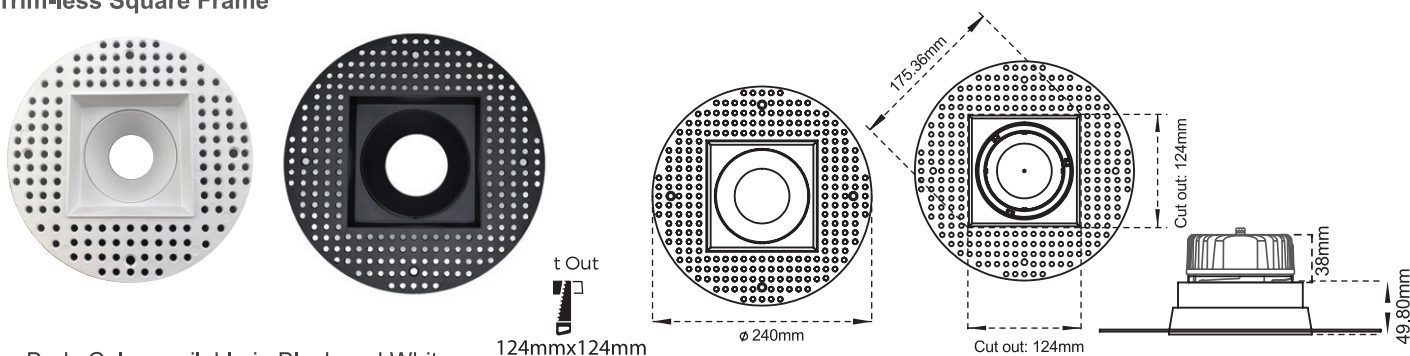


- Body Color available in Black and White
- cETL Certificate
- 5-Year Warranty




Round Baffle Downlights

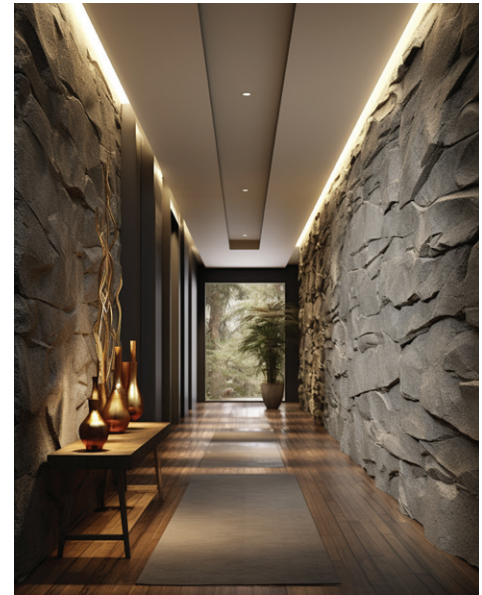

Product Code	Input Voltage	Power	Lumen	Color Temp	Body Color	Size
CL-BF1-R3509-3CCT-WH	120-277 VAC	9W	770lm	3CCT Adjustable (3000K 4000K 5000K)	White	3.5-Inch
CL-BF1-R3509-3CCT-BL	120-277 VAC	9W	770lm		Black	3.5-Inch
CL-BF1-R4012-5CCT-WH	120-277 VAC	12W	1000lm	5 CCT Adjustable 2700K 3000K 3500K 4000K 5000K	White	4-Inch
CL-BF1-R4012-5CCT-BL	120-277 VAC	12W	1000lm		Black	4-Inch



CL-BF1-R3509-3CCT



CL-BF1-R4012-5CCT








• cETL listed

Square Baffle Downlights






Product Code	Input Voltage	Power	Lumen	Color Temp	Body Color	Size
CL-BF1-S4012-5CCT-WH	120-277 VAC	12W	1000lm	5CCT Adjustable 2700K 3000K 3500K 4000K 5000K	White	4 -Inch
CL-BF1-S4012-5CCT-BL					Black	

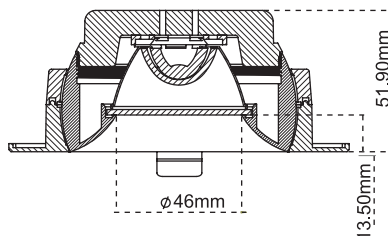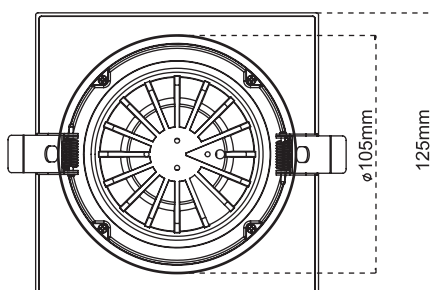

• cETL listed

Star Series Downlights

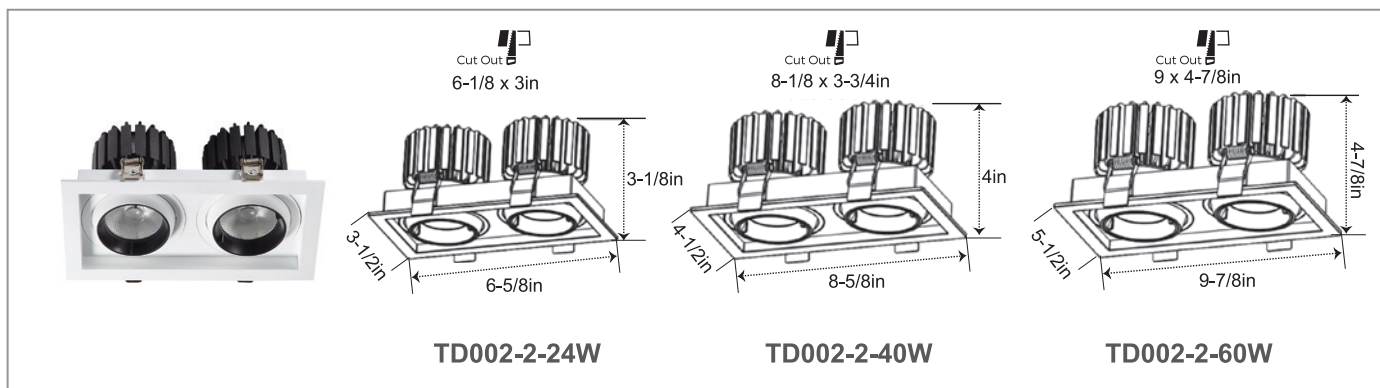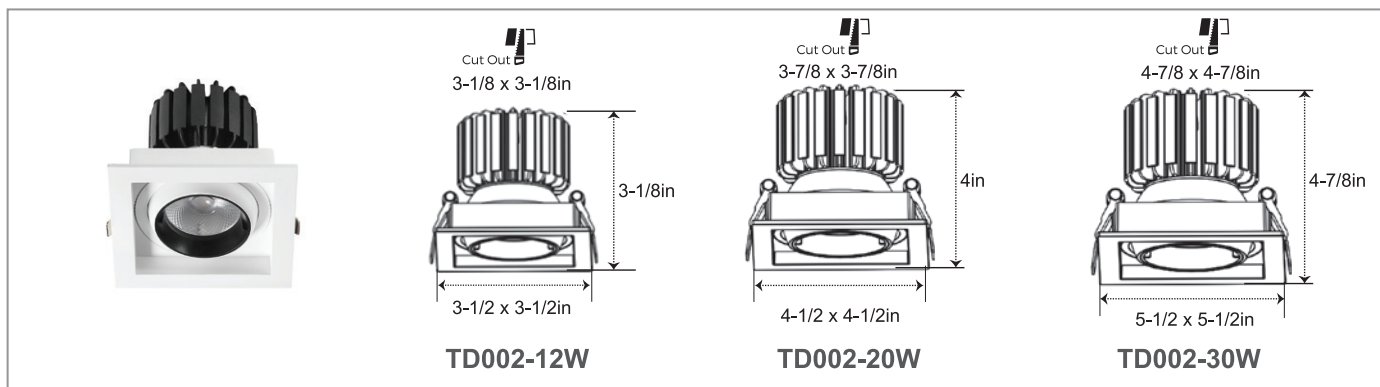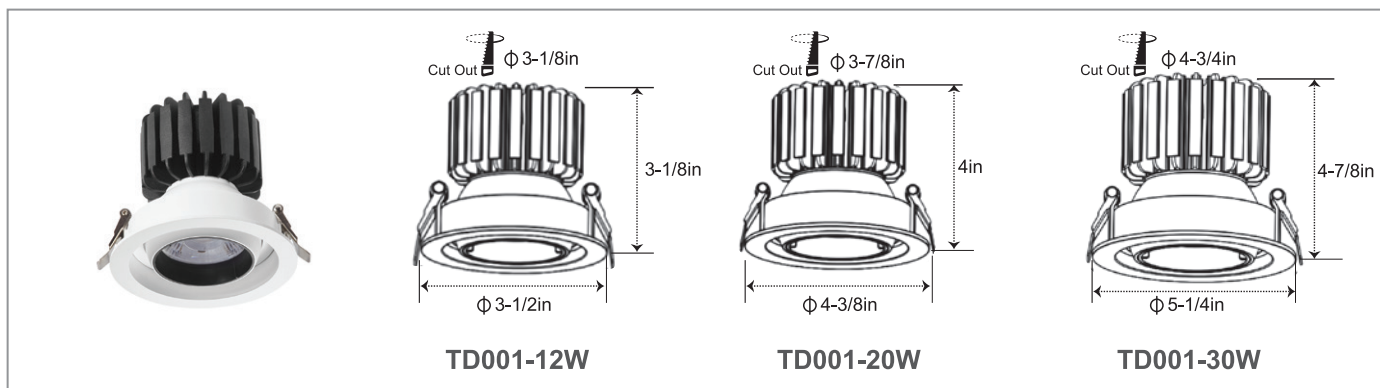


Body color: White housing with Black or White inner ring

Star series downlights are project-base and available in following options:



- Single head downlights in 12W, 20W, and 30W
- Double head downlights in 24W, 40W, and 60W
- Fixture lumen output: 80 to 90 lumen per Watt
- Beam angle: 15°, 24°, and 36°
- LED modules: Citizen, Osram, Philips, Luminus
- Phase-cut and 0-10V dimmable drivers are available, 100-277VAC 50-60Hz
- Color temperature: 2700K, 3000K, 4000K, 5000K, 6000K or customized CCT
- CRI >90 or CRI>95
- UGR<19
- Single-head downlight in round or square shapes




Recessed LED Gimbal Lights

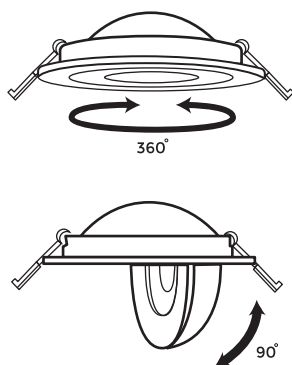

Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DM-3.5-8-5CCT-WH	90-130 VAC	8 W	830 lm	40°	5CCT Adjustable	White	3.5inch
CL-DM-3.5-8-5CCT-BL	90-130 VAC	8 W	830 lm	40°	2700K 3000K	Black	3.5inch
CL-DM-49-5CCT-WH	90-130 VAC	9 W	950 lm	40°	3500K 4000K	White	4 inch
CL-DM-49-5CCT-BL	90-130 VAC	9 W	950 lm	40°	5000K	Black	4 inch

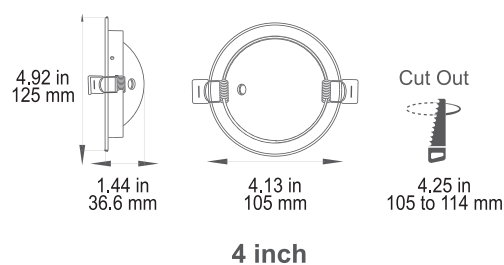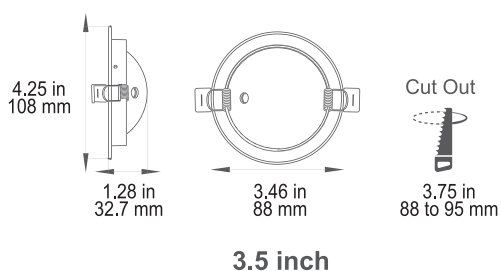

- Durable aluminum body
- Isolated driver, prevents electric shock
- Safe to be in direct contact with insulation
- FT4 wire, Airtight
- No flicker
- cETL approved




Subject to proper dimmer

Recessed LED Slim Panels With Night Light



Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DSNL-49-5CCT-WH	90-130 VAC	9+2 W	800 lm	120°	5CCT Adjustable	White	4 inch
CL-DSNL-49-5CCT-BL	90-130 VAC	9+2 W	800 lm	120°	2700K, 3000K, 3500K 4000K, 5000K	Black	4 inch



- Dual-mode downlight with 2200K night light
- Switch mode within 3 seconds
- Isolated driver, prevents electric shock
- Safe to be in direct contact with insulation
- FT4 wire, Airtight
- No flicker
- cETL approved

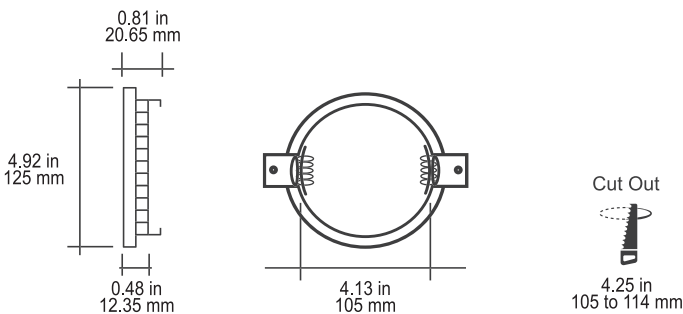


Recessed LED Slim Panels



Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DS-36-5CCT-WH	90-130VAC	6 W	530 lm	120°	5CCT Adjustable	White	3 inch
CL-DS-49-5CCT-WH	90-130VAC	9 W	800 lm	120°	2700K 3000K	White	4 inch
CL-DS-49-5CCT-BL	90-130VAC	9 W	800 lm	120°	3500K 4000K	Black	4 inch
CL-DS-612-5CCT-WH	90-130VAC	12 W	1060 lm	120°	5000K	White	6 inch

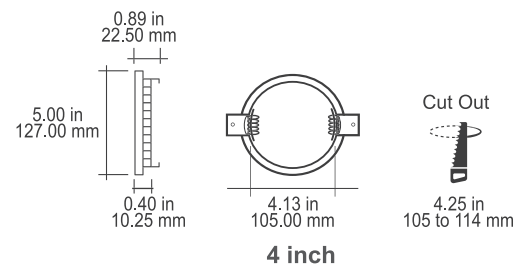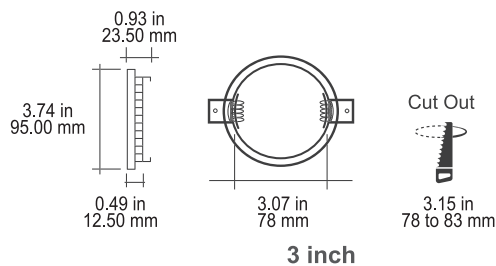

- Low-profile durable aluminum body
- Isolated driver, prevents electric shock
- Safe to be in direct contact with insulation
- Compatible with soffit installation and can be plenum installed in shallow spaces
- FT4 wire, Airtight
- No flicker
- cETL approved

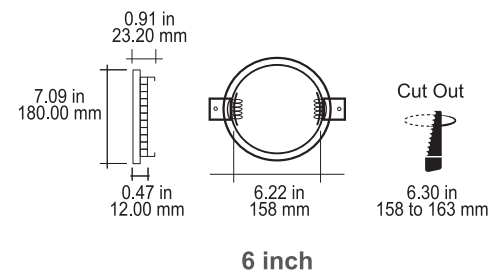

Backlit LED Panels




Low Bay DLC Premium Listed



Product Code	Input Voltage	Power	Lumen	CCT	Panel Size
CL-PL2-1x4-40-5CCT-PA5	120-347VAC	Adjustable 20W-25W-30W	125lm/W	5CCT Adjustable 3000K	1x4 ft
CL-PL2-2x2-40-5CCT-PA5	120-347VAC	40W-45W	125lm/W	3500K 4000K	2x2 ft
CL-PL2-2x4-50-5CCT-PA5	120-347VAC	Adjustable 30W-35W-40W-45W-50W	125lm/W	5000K 6500K	2x4 ft

- Surface mount accessories are available.
- Backlit, uniform light with longer lifetime
- Galvanized Steel housing
- PMMA lens, No-yellowish outlook
- No flicker
- cETL approved

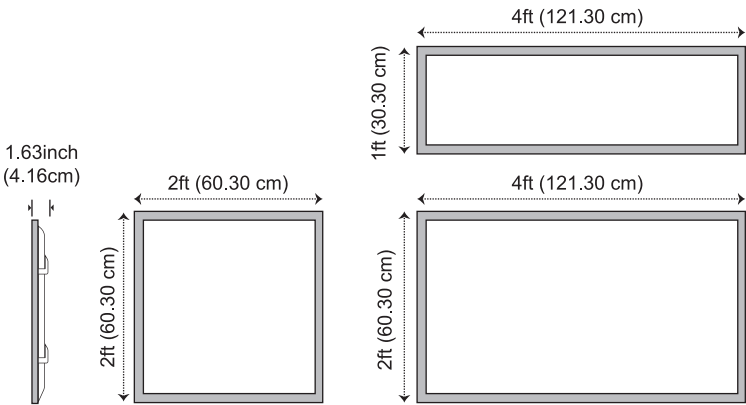

AC

110V

50/60Hz

IC

RATED

0-10V

DIMMABLE

IP20

PF

≥0.9

CRI

>80

5

YEARS

Lifetime

>50,000 hrs


120°

Beam Angle

Mini LED Spot Lights



Product Code	Input Voltage	Power	Lumen	CCT	Beam Angle	Body Color
CL-DL02-2.5-24-3K-WH	24VDC	2.5 W	175lm	3000K	30°	White
CL-DL02-2.5-24-3K-SL	24VDC	2.5 W	175lm	3000K	30°	Silver
CL-DL02-2.5-24-4K-WH	24VDC	2.5 W	175lm	4000K	30°	White
CL-DL02-2.5-24-4K-SL	24VDC	2.5 W	175lm	4000K	30°	Silver

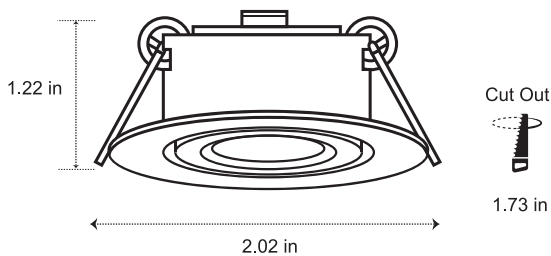

AC
110V
50/60Hz

IC
RATED

DIMMABLE

IP20

PF
≥0.9

CRI
>80

3
YEARS
WARRANTY


Lifetime
>30,000 hrs

-25°C
+50°C
Working
Temperature



Subject to proper driver

- cETL approved
- Aluminum body

Round and Square Step Lights

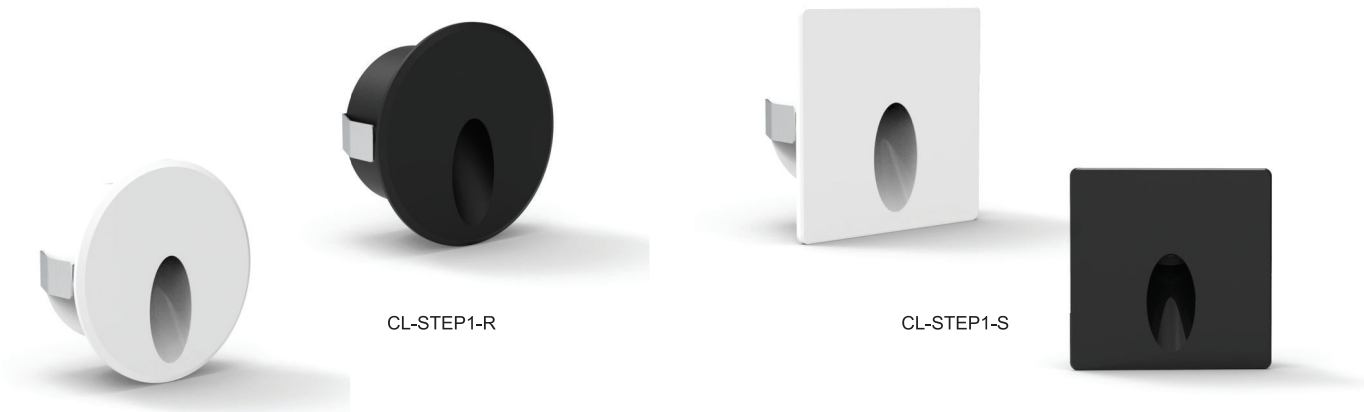


Product Code	Input Voltage	Power	Lumen	CCT	Surface
CL-STEP1-R-3k	24VDC	3W	80lm/W	3000K	Round
CL-STEP1-R-4k	24VDC	3W	80lm/W	4000K	Round
CL-STEP1-S-3k	24VDC	3W	80lm/W	3000K	Square
CL-STEP1-S-4k	24VDC	3W	80lm/W	4000K	Square

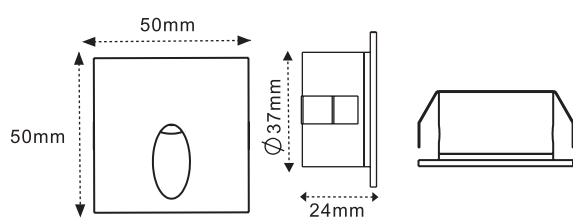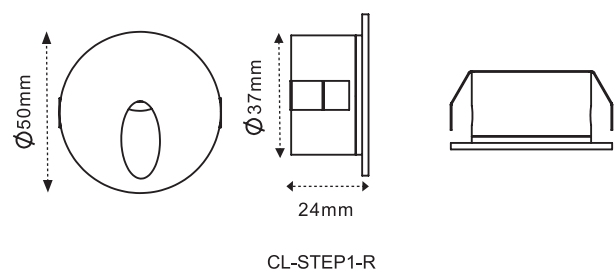

- Body Color available in Black and White
- cETL Certificate


IP Rated Step Lights




CL-STEP2-V-5CCT

CL-STEP2-H-5CCT

Product Code	Input Voltage	Power	Lumen	Color Temp	Body Color
CL-STEP2-H-5CCT-WH	12-24VAC/VDC	3W	80lm	5 CCT Adjustable (2700K 3000K 3500K 4000K 5000K)	White
CL-STEP2-H-5CCT-BL	12-24VAC/VDC	3W	60lm		Black
CL-STEP2-V-5CCT-WH	12-24VAC/VDC	3W	110lm	5 CCT Adjustable (2700K 3000K 3500K 4000K 5000K)	White
CL-STEP2-V-5CCT-BL	12-24VAC/VDC	3W	55lm		Black

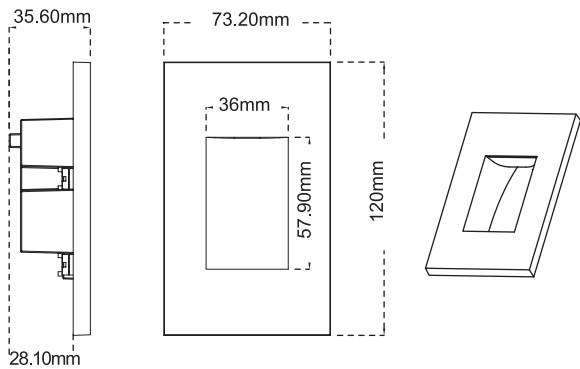

CL-STEP2-V-5CCT

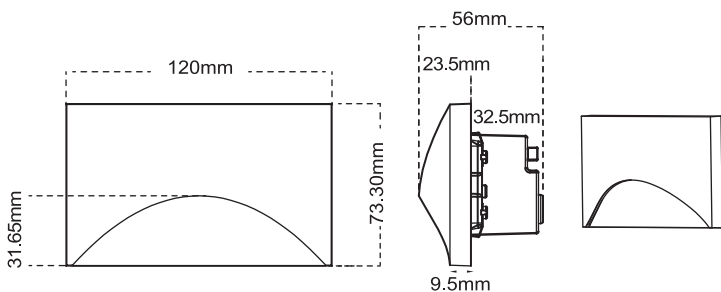

CL-STEP2-H-5CCT



• cETL Certificate


Round LED Puck Light



Input Voltage	Power	Lumen	CRI	CCT
24VDC	3 W	220lm	>80	3CCT Adjustable 3000K- 4000K- 5000K

Product Code	Body Color
CL-Puck300F-324-3CCT-WH	White
CL-Puck300F-324-3CCT-BL	Black
CL-Puck300F-324-3CCT-SN	Satin Nickel


- Surface mounted or recessed installation
- Aluminum body with polystyrene diffuser
- cETL Certificate

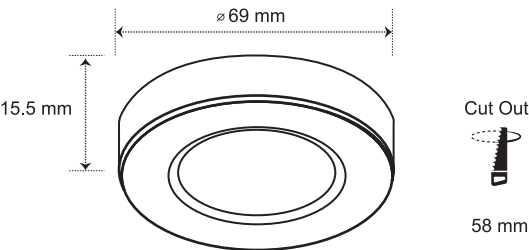

Vanity lights



Product Code	Input Voltage	Power	Color Temp	Lumen	Color
CL-VL-1375M-20W-5CCT-BL	100-277VAC	20W	5CCT Adjustable	110lm/W	Black
CL-VL-1375M-20W-5CCT-GL			2700K-3000K 3500K-4000K-5000K		Gold

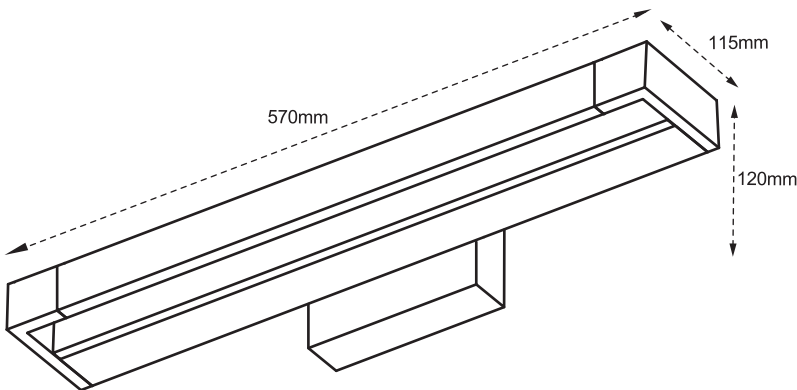

AC
110V
50/60Hz

DAMP
LOCATIONS

TRIAC
DIMMABLE

CRI
>80

WARRANTY
3
YEARS
WARRANTY

Lifetime
>30,000 hrs


-20°C
+40°C
Working
Temperature

- Isolated flicker free driver
- OSRAM LED
- cETL certificate

Vanity lights



Product Code	Input Voltage	Power	Color Temp	Lumen	Color
CL-VL-1334L-26W-5CCT-BL	100-277VAC	26W	5CCT Adjustable	115lm/W	Black
CL-VL-1334L-26W-5CCT-CH			2700K-3000K		Chrome
CL-VL-1334L-26W-5CCT-GL			3500K-4000K-5000K		Gold

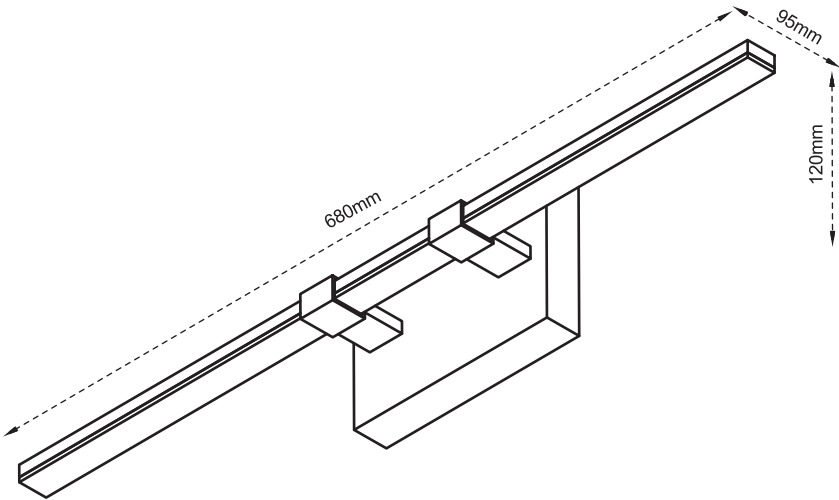

AC 110V 50/60Hz

DAMP LOCATIONS

TRIAC DIMMABLE

CRI >80

3 YEARS WARRANTY

Lifetime >30,000 hrs


-20°C

+40°C



Working Temperature

- Isolated flicker free driver
- OSRAM LED
- cETL certificate

Vanity lights

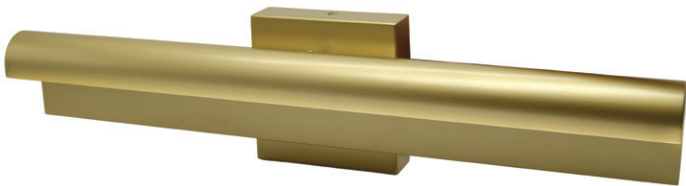

Product Code	Input Voltage	Power	Color Temp	Lumen	Color
CL-VL-1327L-24W-5CCT-BL	100-277VAC	24W	5CCT Adjustable	70lm/W	Black
CL-VL-1327L-24W-5CCT-GL			2700K-3000K 3500K-4000K-5000K		Gold

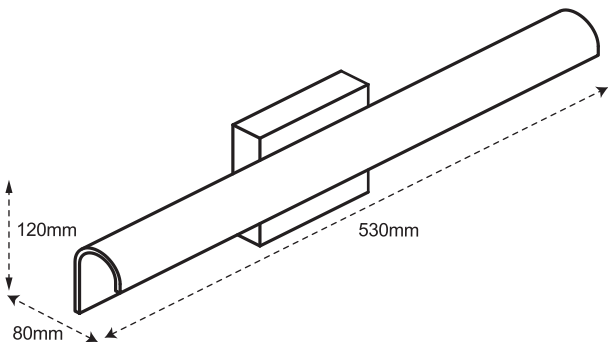


- Isolated flicker free driver
- OSRAM LED
- cETL certificate


Step & Handrail Controllers



Model Number	CL-CONT-STEP-28
Input Voltage	12-24VDC
Power	Each Step <15W Total< 420W
Output Channel	28 Channels
Main Application	Step Controller

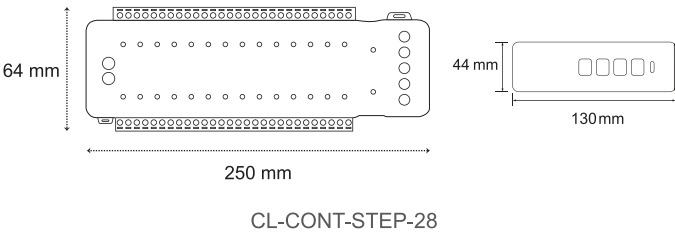

Model Number	CL-CONT-PIXEL-512
Input Voltage	12-24VDC
Max Pixel QTY	512
Support IC	WS2811, WS2818, SM16703, TM1903
Main Application	Handrail Controller

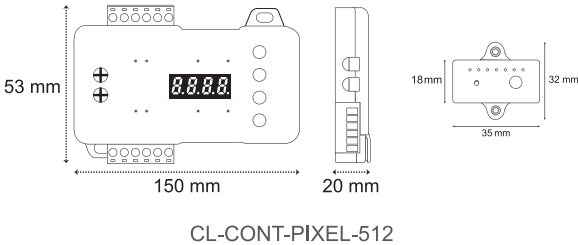

- 2 Motion sensors are included
- Visit Canolight website to download user manual
- 3-Year Warranty

Chaseable strip light Controller



Model Number **CL-AST-RFCSPI01-LV**

Input Voltage 12-24VDC

Output Max 2048 Pixels

Communication RF2.4GHz

Main Application Chaseable strip light controller

Model Number **CL-AST-RFRRFBK-LV**

2.4GHz Remote Controller compatible with CL-AST-RFCSPI01-LV
4zones

Single color|3CCT|RGB|RGBW|RGBCW Strip light controller 5 in 1 Controller



Model Number **CL-AST-SWCWL5-LV**

Input Voltage 12-48VDC

Total output 6A/channel, Max 15A

Communication Wifi | RF2.4GHz | Tuya app(Mobile)

Main Application Single color, 3CCT, RGB|RGBW|RGBCW
and tunable White strip lights

Model Number **CX-W01-P5-12A-RGBCW controller**

Input Voltage 12-48VDC | 144W @ 12V, 288W @ 24V

Total output 5 channels, Max 4A per channel, Max output 12A

Communication Wifi | RF2.4GHz | Tuya app(Mobile)

Main Application Single color, 3CCT, RGB|RGBW|RGBCW
and tunable White strip lights

Model Number **CL-AST-RFCLS2-LV**

Input Voltage 12-48VDC

Total output 6A/channel, Max 15A

Communication RF2.4GHz

Main Application Single color, 3CCT, RGB|RGBW|RGBCW
and tunable White strip lights

Model Number **CL-AST-RFRFUT092-LV**

Communication 2.4 GHz RF Remote Controller ,4 Zones

Compatible with CL-AST-RFCLS2-LV | CL-AST-SWCWL5-LV | CX-W01-P5-12A-RGBCW controllers


Visit Canolight website to download user manual.

Class 2 Constant Voltage LED Drivers




Product Code	IN Voltage	Power	OUT Voltage	OUT Current	PF	DIM
CL-DR-CV-60W-24V-DIM	120-277 VAC 50/60Hz	60 W	24 VDC	2.5 A	0.95	Triac Dimmable
CL-DR-CV-96W-24V-DIM	120-277 VAC 50/60Hz	96 W	24 VDC	4 A	0.95	Triac Dimmable
CL-DR-CV-150W-24V-DIM	120-277 VAC 50/60Hz	150W 75W x 2 channels	24 VDC	3.125A per channel	0.9	5 in 1 Dimmable
CL-DR-CV-200W-24V-DIM	120-277 VAC 50/60Hz	198.24W 99.12W x 2 channels	24 VDC	8.25A per channel	0.9	5 in 1 Dimmable
CL-DR-CV-300W-24V-DIM	120-277 VAC 50/60Hz	297.36W 99.12W x 3 channels	24 VDC	12.39A per channel	0.9	5 in 1 Dimmable


Compatible Triac Dimmers	Brand	Model
	Lutron	AYCL-153P, DV-600PR, DVCL-153P, MACL-153MH, MRF2-6CL, D-600P, NTELV-300P, S-600P, CT-600P, CTCL-153P, TG-600P, TCCL-153P, SFTU-5A3P, PD-6WCL, 6681, 6672
	Leviton	6633, 6674, 6602, IPL06, 6621, 6672, DSL06, DVCL-153P, CTCL-153P, TGCL-153P
	Legrand	ADTP703TU, H703PTW
	Cooper	9540, DAL06P

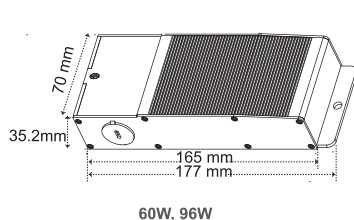


60W, 96W



150W, 200W

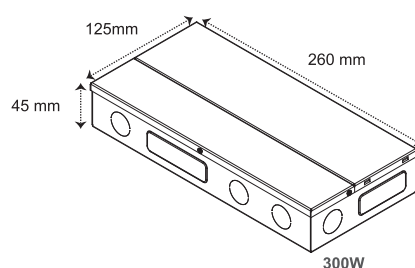

300W






- Do not load more than 80% of driver capacity
- Flicker-free dimming
- Overload, thermal and short circuit protection
- cETL certified, comply with UL8750

Class 2 Constant Voltage Economy LED Drivers



Product Code	IN Voltage	Power	OUT Voltage
CL-EDR-CV-24W-24V-DIM	120VAC 60Hz	24W	24VDC
CL-EDR-CV-60W-24V-DIM	120VAC 60Hz	60W	24VDC
CL-EDR-CV-96W-24V-DIM	120VAC 60Hz	96W	24VDC
CL-EDR-CV-60W-12V-DIM	120VAC 60Hz	60W	12VDC
CL-EDR-CV-96W-12V-DIM	120VAC 60Hz	96W	12VDC

Compatible Triac Dimmers				
Brand	Series	Model	Wattage Range	Dimming Range
LUTRON	Diva	DVCL-153P	24W-150W	0%-100%
	Skylark	SCL-153P	24W-150W	0%-100%
	Maestro	MACL-153M	24W-150W	0%-100%
	Ariadni	AYCL-153P	24W-150W	0%-100%
	Caseta	PD-6WCL	24W-150W	0%-100%
LEVITON	Decora	6674-P	24W-150W	0%-100%
	SureSlide	6672	24W-150W	0%-100%
	IllumaTech	IPL06	24W-150W	0%-100%
	Decora Smart	DW6HD-1BZ	24W-150W	0%-100%
	Trimatron	6683-I	24W-150W	0%-100%
LEGRAND	Radiant	RHCL453PTCCCV6	24W-150W	0%-100%
	Adorne	ADTP703TU	24W-150W	0%-100%
	Pass & Seymour	LSCL453PTC	24W-150W	0%-100%
	Harmony	H703PTUTC	24W-150W	0%-100%
	Pass & Seymour	HCL453PTCCCV6	24W-150W	0%-100%
COOPER	AL Series	AL dimmer	24W-150W	0%-100%
	Devine	DAL06P-C1	24W-150W	0%-100%
	Aspire	9540-N	24W-150W	0%-100%
	Decorator	DAL06P-C2-K	24W-150W	0%-100%
	Halo	RL06P-C1-K	24W-150W	0%-100%

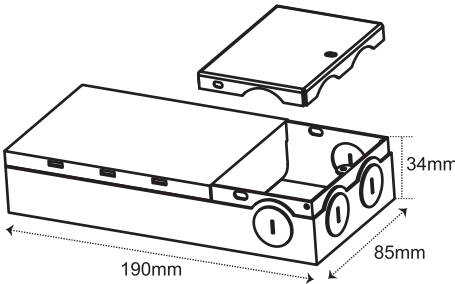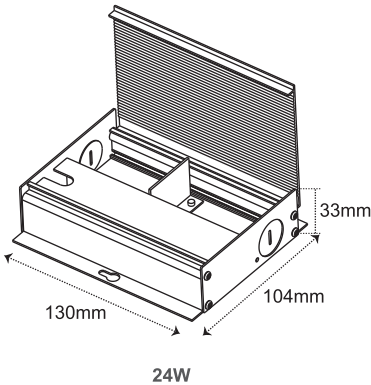

- Do not load more than 80% of driver capacity
- 24W and 60W drivers are suitable for dry locations
- 96W drivers are suitable for damp locations
- cETL approved

Outdoor Constant Voltage LED Drivers




96W




192W

Product Code	Input Voltage	Power	OUT Voltage	OUT Current	IP
CL-ODR2-CV-96W-24V-DIM	110-277VAC	96W	24 VDC	4A Max	68
CL-ODR2-CV-192W-24V-DIM	110-277VAC	96W x 2 channels	24 VDC	2x4A Max	68

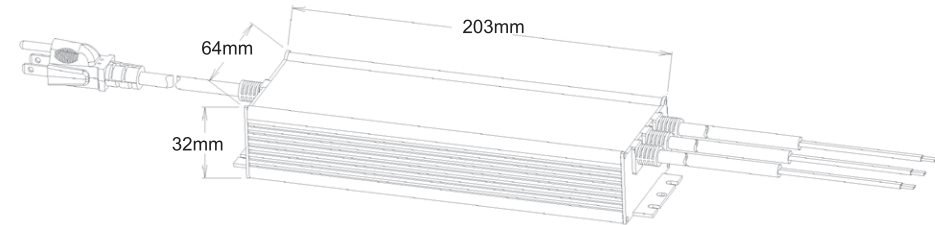

96W
Dimensions: 224x64x32 mm(LxWxH)
The overall length including the end caps

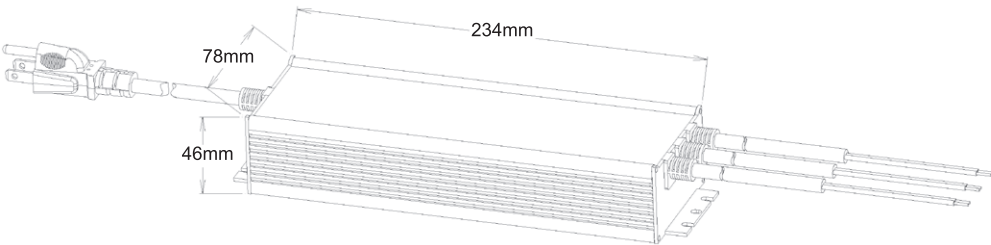

192W
Dimensions: 258x78x46 mm(LxWxH)
The overall length including the end caps

- Do not load more than 80% of driver capacity
- Triac/Phase, 0-10V, 1-10V, Potentiometer, 10V PWM Dimming (5 in 1)
- Over current, short circuit and over voltage protection
- Suitable for outdoor use
- cUL approved

AC 110V 50/60Hz

PF ≥0.95

TRIAC DIMMABLE

2 Class 2

WET LOCATION

5 YEARS WARRANTY

IP68

-30°C

+50°C

Working Temperature

Outdoor Transformers



100W




200W




300W


Product Code	IN Voltage	Power	OUT Voltage	Housing	Core
CL-ODR-CV-100W	120VAC 60Hz	100W	12VAC	PC+UV	Brass
CL-ODR-CV-200W	120VAC 60Hz	200W	12V&15V AC Double Channel	PC	Brass
CL-ODR-CV-300W-PRO	120VAC 60Hz	300W	12V/13V/14V/15V AC Single Channel	304 Stainless Steel	Brass

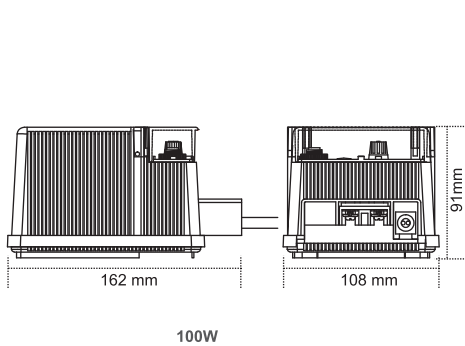

100W



200W

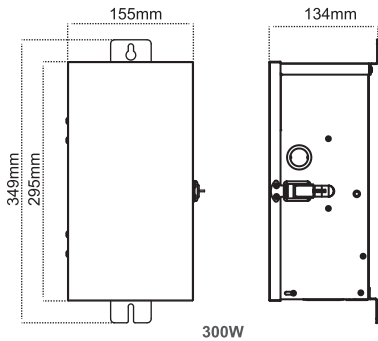

300W

300W Accessories

CL-ODRA-Photocell-JL104A



CL-ODRA-Timer-HU21M



CL-ODRA-WIFI socket-LSPA6





- 100W and 200W transformers come with integrated timer and photocell
- Accessories are available for 300W transformer including timer, photocell and WIFI socket
- Suitable for outdoor use
- cUL approved (100W Transformer)
- cETL approved (200W and 300W Transformers)
- Do not load more than 80% of transformer capacity



Constant Voltage Plugin LED Driver



Product Code	Input Voltage	Power	OUT Voltage	IP
CL-PDR-CV-60W-24V	100-240VAC 50/60Hz	60W	24 VDC 2.5A	20
CL-PDR-CV-96W-24V		96W	24 VDC 4A	

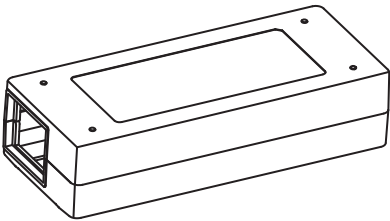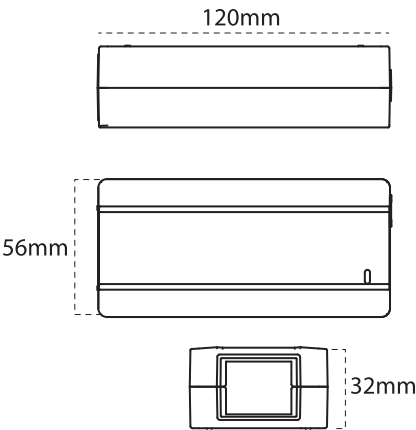

60W

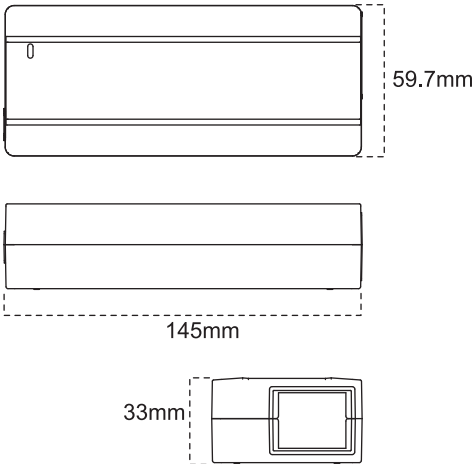


96W


Ultra Slim Constant Voltage LED Driver




Product Code	Input Voltage	Power	OUT Voltage	DIM
CL-UDR-CV-60W-24V-DIM	120VAC 60Hz	60W	24 VDC 2.5A	ELV/MLV/TRIAC ELECTRONIC DIM
CL-UDR-CV-96W-24V-DIM		96W	24 VDC 4A	

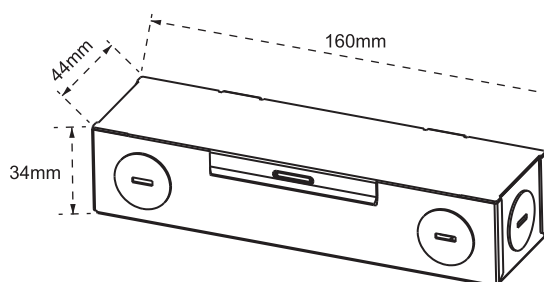

Constant Voltage LED Driver

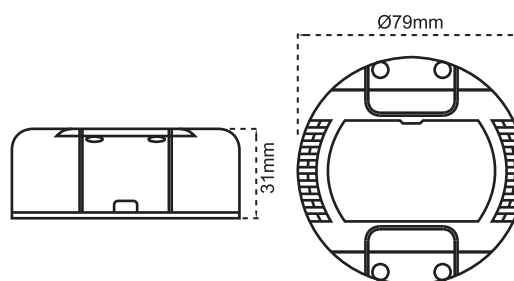

Product Code	Input Voltage	Power	OUT Voltage	IP	DIM
CL-DDR-CV-60W-24V-DIM	90-130VAC 50/60Hz	60W	24 VDC	20	Triac Dimmable



- Flicker-free dimming
- Overload, thermal and short circuit protection
- cETL approved

Constant Voltage Commercial LED Drivers





OTM-PDJ96-J24
96W



OTM-PDJ200-J24
200W

Product Code	Input Voltage	Power	OUT Voltage	DIM
OTM-PDJ96-J24	200-347VAC	96W	24 VDC	0-10V Dim
OTM-PDJ200-J24	200-347VAC	200W	24 VDC	0-10V Dim

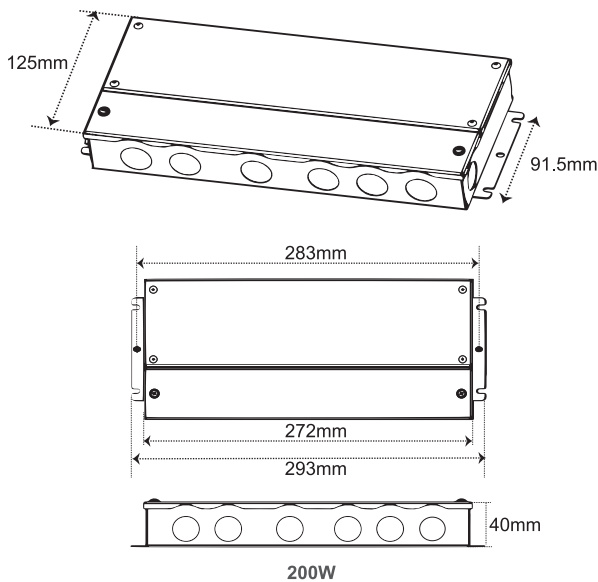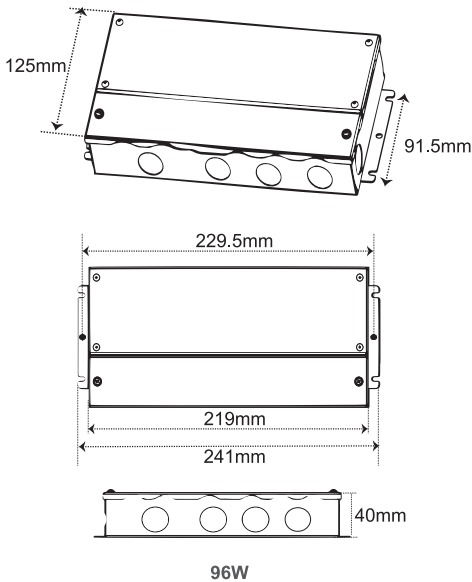

- cUL approved
- Do not load more than 80% of driver capacity



INDUSTRIAL LIGHTS

cano  light
Canadian Brightness


Industrial UFO High Bay Lights




DLC Premium Listed



Product Code	Input Voltage	Power	Lumen	Color Temp
CL-IND-UFO1-150W-3CCT-BL	120-347VAC 50/60Hz	Adjustable 100W/120W/150W	138lm/W (3500K) 158lm/W (4000K) 151lm/W (5000K)	3CCT Adjustable 3500K 4000K 5000K
CL-IND-UFO1-240W-3CCT-BL	120-347VAC 50/60Hz	Adjustable 160W/200W/240W	140lm/W (3500K) 160lm/W (4000K) 146lm/W (5000K)	

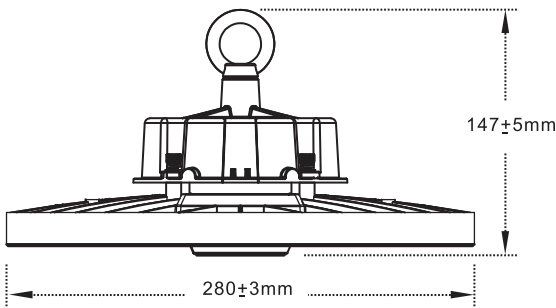

CL-IND-UFO1-150W-3CCT-BL

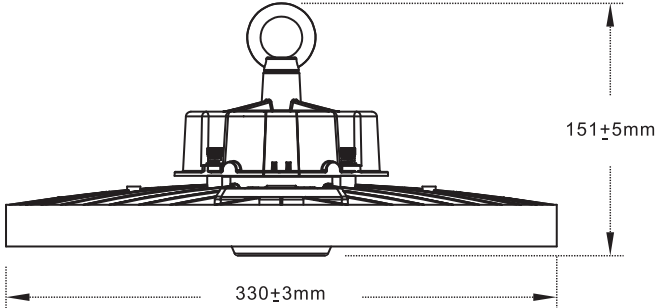

CL-IND-UFO1-240W-3CCT-BL



- 6ft power and dimming cords included.
- Hook and sensor base included.
- Aluminum die-cast body with PC lens
- cUL certificate

Industrial UFO Accessories



CL-ACC-UFO1-EMERGENCY DRIVER-30W

Emergency driver for CL-IND-UFO1-150W-3CCT-BL

CL-ACC-UFO1-EMERGENCY DRIVER-40W

Emergency driver for CL-IND-UFO1-240W-3CCT-BL



CL-ACC-UFO1-SM KIT 150/240

Surface mount kit



CL-ACC-UFO1-PC COVER150

PC cover for CL-IND-UFO1-150W-3CCT-BL

CL-ACC-UFO1-PC COVER240

PC cover for CL-IND-UFO1-240W-3CCT-BL



CL-ACC-UFO1-ALU COVER150

Aluminum cover for CL-IND-UFO1-150W-3CCT-BL

CL-ACC-UFO1-ALU COVER240

Aluminum cover for CL-IND-UFO1-240W-3CCT-BL



CL-ACC-UFO1-PC LID 150/240

PC Lid



CL-ACC-UFO1-WG150

Web guard for CL-IND-UFO1-150W-3CCT-BL

CL-ACC-UFO1-WG240

Web guard for CL-IND-UFO1-240W-3CCT-BL



CL-ACC-IND-MOTION SENSOR

Motion sensor, detection distance 15 meters



CL-ACC-IND-PIR SENSOR

PIR sensor, detection distance 12 meters



CL-ACC-IND-REMOTE CONTROLLER

Remote controller for motion and PIR sensors



CL-ACC-UFO1-Safety Hanger



LED linear High Bay Lights



DLC Premium Listed



Product Code	Input Voltage	Power	Lumen	Color Temp
CL-IND-LHB1-2FT-165W-3CCT-WH	120-347ACV 50/60Hz	Adjustable 130W/150W/165W	138lm/W (3500K) 151lm/W (4000K) 140lm/W (5000K)	3CCT Adjustable 3500K 4000K 5000K
CL-IND-LHB1-4FT-220W-3CCT-WH	120-347ACV 50/60Hz	Adjustable 180W/200W/220W	138lm/W (3500K) 153lm/W (4000K) 142lm/W (5000K)	

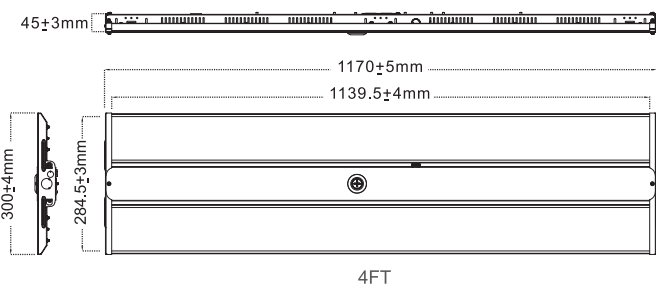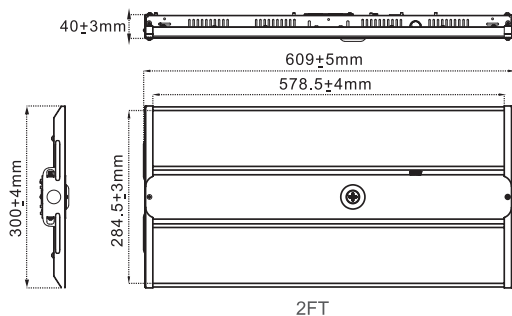

- 6ft power and dimming cords included.
- Chain and sensor base included.
- cUL certificate

LED linear High Bay Accessories



CL-ACC-LHB1-WG165

Wire guard for 2ft (CL-IND-LHB1-2FT-165W-3CCT-WH)



CL-ACC-LHB1-WG220

Wire guard for 4ft (CL-IND-LHB1-4FT-220W-3CCT-WH)



CL-ACC-LHB1-EMERGENCY DRIVER-16W

Emergency Driver



CL-ACC-LHB1-PENDANT KIT

Pendant kit



CL-ACC-LHB1-SM KIT

Surface mount kit



CL-ACC-IND-MOTION SENSOR

Motion sensor, detection distance 15 meters



CL-ACC-IND-PIR SENSOR

PIR sensor, detection distance 12 meters



CL-ACC-IND-REMOTE CONTROLLER





Remote controller for motion and PIR sensors

Industrial LED Strip Lights



DLC Premium Listed

Product Code	Input Voltage	Power	Lumen	Color Temp
CL-IND-ST1-4FT-40W-5CCT-WH	120-347VAC 50/60Hz	Adjustable 20W/30W/40W	120-140lm/W	5CCT Adjustable 3000K 4000K 5000K 5700K 6500K
CL-IND-ST1-8FT-80W-5CCT-WH	120-347VAC 50/60Hz	Adjustable 60W/70W/80W	120-140lm/W	

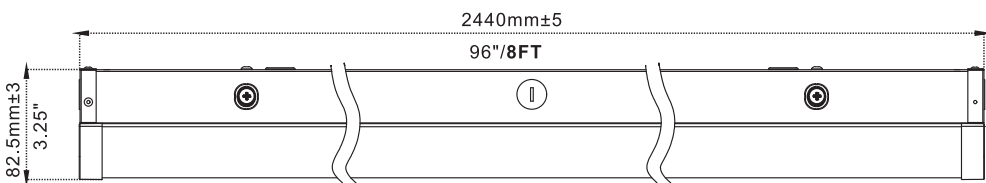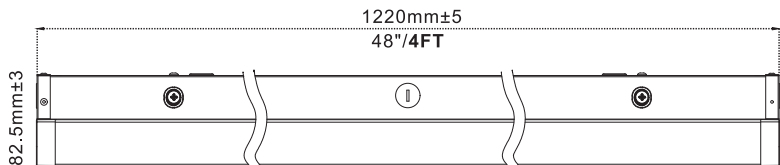

- Surface mount kit included
- cUL certificate



CL-ACC-ST1-PENDANT KIT
Pendant kit



CL-ACC-ST1-MBS
Middle bracket to join industrial strip light in surface mount installation



CL-ACC-ST1-MBP
Middle bracket to join industrial strip light in pendant installation



CL-ACC-ST1-MOTION SENSOR
Motion sensor



CL-ACC-ST1-EMERGENCY DRIVER-8W
8W Emergency driver

Constant power		Battery	Emergency time	Output current
25-48VDC	8W	Li-ion battery 7 4V2500mA	1.5 Hours	160-320mA